

CANARE

27A

International Edition

CANARE,

offering value - added products to meet your needs for today and tomorrow.

Five-point Product Development Goal



1

Responsive

Fulfilling the needs of the industry through custom solutions.

2

Unique

Incorporating valuable features not offered by competitors.

3

Cutting-edge

Devoted to meeting the requirements for emerging technologies.

4


Enduring

Concentrated on products with long-term value.

5

Global

Focused on niche markets as well as universal products.

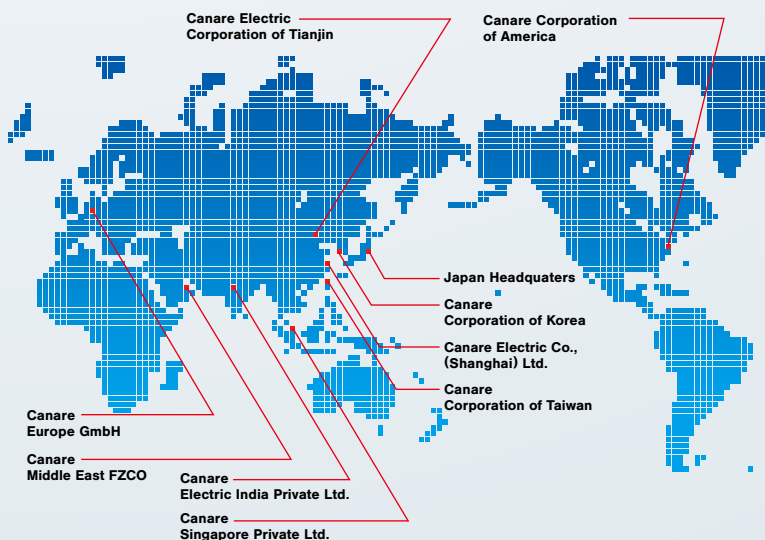

Corporate Profile

- Name: Canare Electric Co., Ltd.
- Incorporated: February 1974 (commenced operation 1970)
- Capital: 1.04 billion yen
- Activities: Manufacture and sale of audio-video cables, connectors, assemblies, converters and related products for professional audio and video industry.

Company Locations

Japan Headquarters (Overseas Department)
5F, LIVMO Rising Bldg., 3-19-1 Shinyokohama,
Kohoku-ku, Yokohama-shi,
Kanagawa, 222-0033 Japan
Phone: +81-45-620-7332
Fax: +81-45-620-7364
• Warehouse: Nagoya Japan

Subsidiary Companies

- Canare Corporation of America
- Canare Corporation of Korea
- Canare Corporation of Taiwan
- Canare Electric Corporation of Tianjin
- Canare Singapore Private Ltd.
- Canare Electric India Private Ltd.
- Canare Europe GmbH
- Canare Middle East FZCO

www.canare.com
www.canare.co.kr
www.canare.com.tw
www.canare.com.cn
www.canare.com.sg
www.canare.in
www.canare.eu
www.canare-me.com

- Canare Electric (Shanghai) Co., Ltd.
- Canare Harness Co., Ltd (Japan)
- Canare System Works Co., Ltd (Japan)
- Canare Connected Products Co., Ltd. (Japan)



Contents

IP Connectivity Products

3 IP Connectivity Products

Technical Trend

5 12G-SDI

Fiber-Optic Systems

7 Overview

10 EO/OE Converters, Repeater

15 Mux/Demux, Optical Splitter

16 Power Supply

17 HFO Transmission Devices

19 HFO Camera Cables

24 HFO Camera Cable Checkers

25 HFO Camera Connector Panels

26 HFO Camera Connector Panels, Splice Enclosures

27 Fiber-optic Cables

Connectors

31 75Ω BNC Connectors

37 Active BNC

39 75Ω Micro BNC Connectors

41 75Ω BNC, N Connectors

42 75Ω DIN Connectors

43 75Ω Micro-miniature Coax Connectors

44 75Ω Multichannel Coax Connectors

45 75Ω Triaxial Connectors

46 RCA Connectors

47 F Connectors

48 Phone Plugs

49 50Ω BNC Connectors

50 50Ω TNC, N, SMA Connectors

51 Cable Stripper, Crimp Tools

54 Impedance Transformers

Cables

55 Q&A

57 Star Quad Microphone Cables

60 Two-conductor Shielded Cables

64 AES/EBU Digital Audio Cables

65 Speaker Cables

67 OFC Line, A/V Composite Cables

68 DMX, RS422 Cables

69 Ethernet Cables

70 75Ω Coaxial Cables

76 50Ω Coaxial Cables

Panels and Patchbays

77 75Ω Video Patchbays

85 Unloaded Video Jack Panels

86 RS422 Patchbays

87 Video Patch Cords

88 Connector Panels

90 Audio Patchbays

Multichannel Systems

92 Overview

93 Snake Trunks, Cable Reel Snakes

94 Fantails, Junction Boxes

95 Pin Assignments, Reels

96 Reels

Cable Assemblies

97 BNC

98 Micro BNC, DIN, RCA (V ideo), Triax

99 Ethernet

99 Ethernet, RS422, DMX

101 XLR, Phone

102 RCA (Audio), Speaker, Audio Patch

103 Digital Audio, Analog Audio

104 VGA, 3 RCA, 2 RCA

105 HDMI

108 HDMI, DVI, VGA

IP Connectivity Products


24-Port Keystone IP Patchbays, 24-Port Keystone IP Panel

Introduction



Canare has launched its own series of IP connectivity solutions. The new series includes patch panels, couplers, and looping plugs. By evaluating existing IP products, we re-engineered items and specialized them for IP broadcasting systems, IP OB-Vans, and other IP-based A/V applications.

Design Concept

Canare's engineer thought compatibility would be a significant aspect of being accepted throughout IP-based broadcast as well as audio-visual applications. The Keystone style is IEC standardized snap-in construction. We recognize keystone's modularity will provide flexible solutions to all system integrators, live production, and studio engineers.

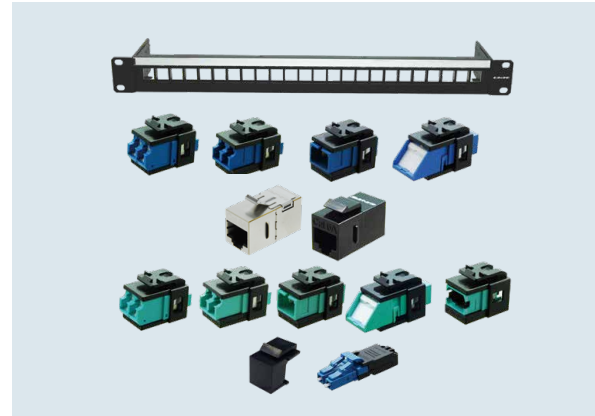

Unique 7 Points

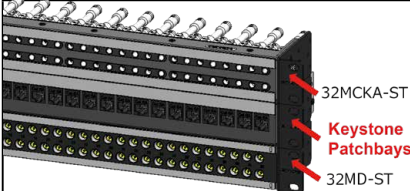1 Unified Design  Canare IP panels are similar in appearance to our video patchbays.	3 Non-Splitted Designation Strip  8.5 × 426mm free designation area to write on.	6 No Special Tool  For interchanging couplers, just use a flathead screwdriver.
2 Mobile Truck Ready  Tested through heavy-duty vibration for live production applications.	4 Wide Range of IP Interface  Choose from 12 types of IP couplers.	7 Depth Adjustable Front Mount  In case of space efficiency, patching surface can be recessed 25mm, 50mm or 75mm deeper.
5 Cable Tie Bar  Optional cable tie bar will help to optimize wiring support.		

24-Port Keystone IP Patchbays

Model	Panel Size	Description
24KRJ-6AJJ New	1RU	24 × RJ45 Unshielded Cat6A Couplers
24KRJS-6AJJ New	1RU	24 × RJ45 Shielded Cat6A Couplers

Standard panel color: Black.

24-Port Keystone IP Panel

Model	Panel Size	Description
K24S-1U-BLK New	1RU	24-Port, Unloaded Panel

Standard panel color: Black.

Key Features and Benefits

- Unified design
- Robust construction
- 8.5 × 426mm free designation area
- Can be recessed 25mm.
- Ground stamping


Note: 50 or 75mm recessed panel mount by M-MA1U02A (see page 89)

Accessories

Model	Description
M-KB01 Coming Soon	Cable Tie Bar
SG032-T30 New	Grounding Cable 3.2m
SG002-T36 New	Grounding Cable 0.2m

- Grounding cables are ideal for shielded Cat6A panels and a rack.

Website

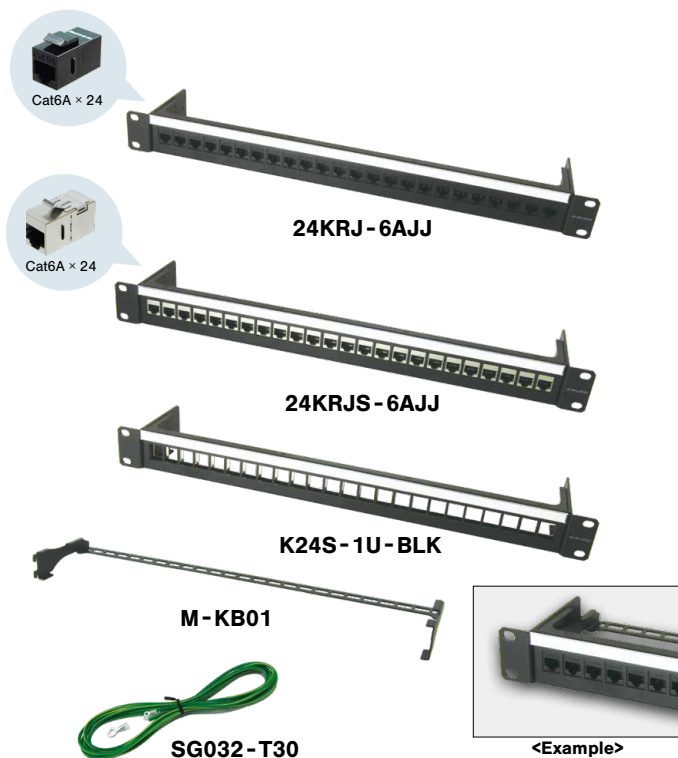

Keystone IP Couplers

Type	Appearance	Model	Description	Standards
RJ45 Cat6A		New RJ45-J6A	RJ45 Coupler	IEC 60603-7 ANSI/TIA-568-C.2
		New RJSJ-J6A	RJ45 Coupler (shield)	
DLC		New FKDLJ-JS	DLC Coupler (SM)	JIS C 5964-20 IEC 61754-20 IEC 60603-7
		New FKDLJ-JM	DLC Coupler (MM)	
		New FKDLJ-JS-S	DLC Coupler with Shutters (SM)	
		New FKDLJ-JM-S	DLC Coupler with Shutters (MM)	
SC		New FKSJ-JS	SC Coupler (SM)	JIS C 5964-4 IEC 61754-4 IEC 60603-7
		New FKSJ-JM	SC Coupler (MM)	
		New FKSJ-JS-S	SC Coupler with Shutter (SM)	
		New FKSJ-JM-S	SC Coupler with Shutter (MM)	
MPO		New FKMPJ-JM	MPO Coupler (MM)	JIS C 5964-7 IEC 61754-7 IEC 60603-7
-		New BP-K(10)	Blank Plate (10 pcs.)	IEC 60603-7

Key Features and Benefits

- Compatible with Keystone Panels.
- A wide array of different connection options.
- Fast and easy to install.
- Blank Plate : Protects unused ports from dirt and dust.


LC Duplex Multi-Fiber Optic Loop-Back

Appearance	Model	Description	Coupler
	FKDLP-SUL New	DLC Loop-Back, U-link (SM)	FKDLJ-JS FKDLJ-JS-S


Key Features and Benefits

- Loop signal for maintenance
- Built-in dust cap holder


Website




RJ45-J6A




RJSJ-J6A




FKDLJ-J*




FKDLJ-J*-S




FKSJ-J*



FKSJ-J*-S



FKMPJ-JM



FKDLP-SUL

<Ordering Information>

Labeling Information:

F	K	SJ - J	S	- S
----------	----------	---------------	----------	------------

Series

RJ	RJ45
F	Optical Fiber Connector

Shutters

S	Shutters
Blank	No Shutters

Signal

6A	Cat6A
S	Single Mode
M	Multi Mode

Keystone

K	With Keystone Attachment
Blank	No Keystone Attachment

Connector Type

RJ	UJ-J	Unshielded Coupler
RJ	SJ-J	Shielded Coupler
FK	DLJ-J	DLC Coupler
FK	SJ-J	SC Coupler
FK	MPJ-J	MPO Coupler

Cable and Connectors for UHDTV

Recent years, developments of Serial Digital Interface (SDI) require wider bandwidth and higher data rates. Cables and connectors are becoming a significant role in high definition video productions to work properly. The table on the right shows comparison of high definition video formats which are standardized by SMPTE (Society of Motion Picture and Television Engineers). Canare, as a member of SMPTE, has provided the right products based on the requirements.

Typical Cable Lengths

The right table shows typical cable lengths according to cable loss at receiver specified in the standard. The results may be different (most likely longer) because it's really the matter of the performance of a chipset built in. Obviously any other coax cables will be accepted if an application does not require such long, like patch cords.

Video Formats

SMPTE	ST 292	ST 424	ST 2081-1	ST 2082-1
Format	HD-SDI	3G-SDI	6G-SDI	12G-SDI
So-called	HDTV	HDTV	UHDTV-1	UHDTV-1
Data Rate	1.485 Gbps	2.97 Gbps	5.94 Gbps	11.88 Gbps
Pixels	2K 1080i/720p	2K 1080p	4K 2160p30	4K 2160p60
Cable	75Ω Coax	75Ω Coax	75Ω Coax	75Ω Coax
Cable Loss at Receiver	20 dB @ 750 MHz	30 dB @ 1.5 GHz	40 dB @ 3 GHz	40 dB @ 6 GHz
Connector	75Ω BNC	75Ω BNC	75Ω BNC	75Ω BNC
Return Loss	15 dB @ 1.5 GHz	10 dB @ 3 GHz	7 dB @ 6 GHz	4 dB @ 12 GHz

Cable Lengths

SMPTE	ST 292	ST 424	ST 2081-1	ST 2082-1
Format	HD-SDI	3G-SDI	6G-SDI	12G-SDI
L-2.5CHD	66 m	69 m	64 m	43 m
L-4.5CHD	115 m	119 m	109 m	74 m
L-3.3CUHD	85 m	90 m	83 m	58 m
L-5.5CUHD	155 m	161 m	149 m	102 m


The lengths are based on SMPTE standards and will vary depending on receiving equipment.

12G-SDI Signal Integrity

Canare 12G-SDI products are developed by a huge investment of time and research. Our products are verified and approved by the TRUE 12 GHz test equipment in addition, collaborations with top brands of broadcast products.


Coaxial Cables: L-UHD Series

L-5.5CUHD for any applications up to around 100 meters. L-3.3CUHD for intermediate distance around 60 meters. Both are evaluated with endurance reliabilities such as bending, impact, and accelerated test.

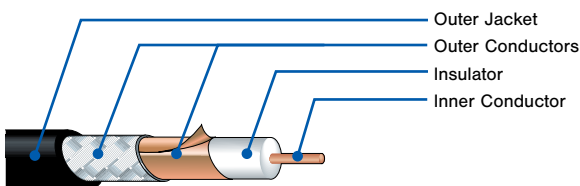


L-5.5CUHD (page 70)

Nominal Attenuation

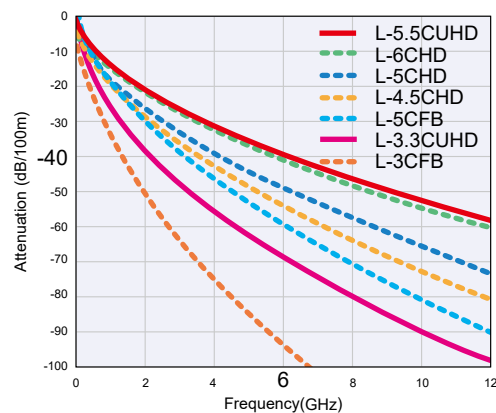

Return Loss

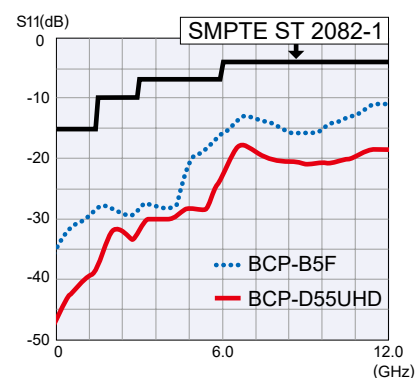

BNC Connectors and Patchbays


BNC connectors and video patchbays should be fully matched with 12G coax cables. Canare developed these products over the years of improvements in order to exceed SMPTE requirements.




BCJ-BPLHK (page 35)

MCVJKA-ST* (page 78)

2K/4K: 3G-SDI Single-link or Multi-link

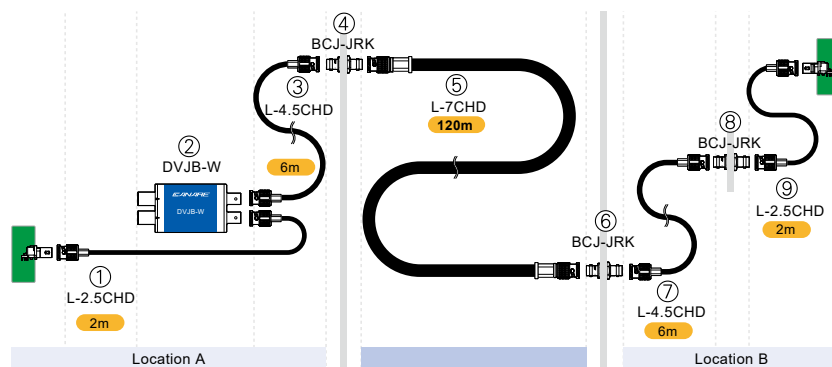

Attenuation Graph

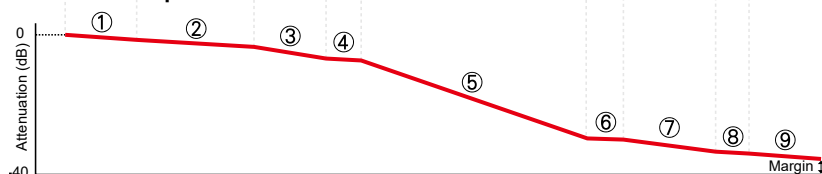


Typical Value

Factor	① L-2.5CHD	② DVJB-W	③ L-4.5CHD	④ BCJ-JRK	⑤ L-7CHD	⑥ BCJ-JRK	⑦ L-4.5CHD	⑧ BCJ-JRK	⑨ L-2.5CHD	BNC Plugs	Total (dB)	Limit (dB)	Margin (dB)
Q'ty	2	1	6	1	120	1	6	1	2	10	26.3	30.0	3.7
Unit	m	pcs	m	pcs	m	pcs	m	pcs	m	pcs			
dB/unit	0.431	0.9	0.251	0.2	0.159	0.2	0.251	0.2	0.431	0.1			
dB	0.862	0.9	1.506	0.2	19.08	0.2	1.506	0.2	0.862	1			

Standards referred to:

- ST424: 3 Gb/s Signal/Data Serial Interface
- ST425-1: Single Link 3 Gb/s SDI (2K)
- ST425-2: Single Link 3 Gb/s SDI (Stereo)
- ST425-3: Dual Link 3 Gb/s SDI for Single Images w/ 6 Gb/s payload (2K/4K)
- ST425-4: Dual Link 3 Gb/s SDI (Stereo)
- ST425-5: Quad Link 3 Gb/s SDI for Single Images w/ 12 Gb/s payload (4K)
- ST425-6: Quad Link 3 Gb/s SDI for a Stereo Pair of 6 Gb/s (Stereo/2K/4K)

4K/8K: 12G-SDI Single-link or Multi-link

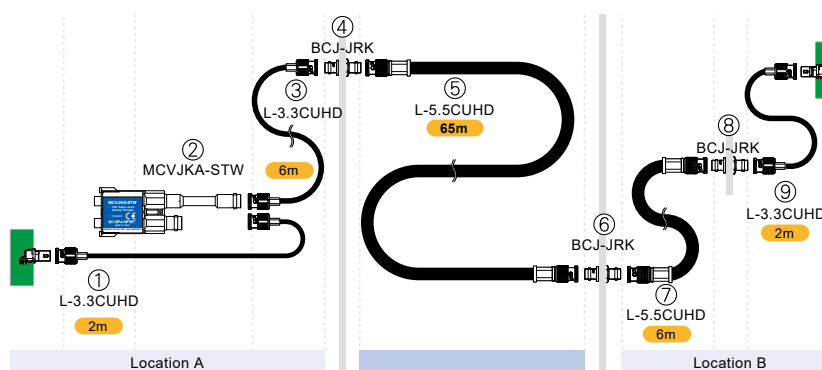

Attenuation Graph



Typical Value

Factor	① L-3.3CUHD	② MCVJKA-STW	③ L-3.3CUHD	④ BCJ-JRK	⑤ L-5.5CUHD	⑥ BCJ-JRK	⑦ L-5.5CUHD	⑧ BCJ-JRK	⑨ L-3.3CUHD	BNC Plugs	Total (dB)	Limit (dB)	Margin (dB)
Q'ty	2	1	6	1	65	1	6	1	2	10	37.6	40.0	2.4
Unit	m	pcs	m	pcs	m	pcs	m	pcs	m	pcs			
dB/unit	0.685	2	0.685	0.2	0.391	0.2	0.391	0.2	0.385	0.1			
dB	1.37	2	4.11	0.2	25.415	0.2	2.346	0.2	0.77	1			

Standards referred to:

- ST2082-1: 12 Gb/s Signal/Data Serial Interface
- ST2082-10: Single Link 12 Gb/s SDI (4K)
- ST2082-11: Dual Link 12 Gb/s SDI for Single Images w/ 24 Gb/s Payload (4K/8K)
- ST2082-12: Quad Link 12 Gb/s SDI for Single Images w/ 48 Gb/s Payload (4K/8K)

Fiber-Optic Systems

Overview

Trunk Lines at the Moment

■ Migrating to Fiber Optics

Trunk lines carry many different kinds of signals—video, synchronization, audio, control, power supply—and consequently they're usually comprised of numerous different types of cables. As a result, conduits, electrical pits, and ladders tend to overflow with cabling, leaving hardly any room when lines must be added to upgrade or expand the system.

But, converting these disparate signals into optical signals and transmitting them using fiber optic cables greatly reduces the need for so many specialized cables. Converting trunk lines to fiber optics makes it much easier to design and upgrade equipment and systems, because once laid these lines can be used with considerable flexibility. Fiber optic cables also have smaller diameters, meaning they take up less space, a clear advantage in alleviating some of the problems of today's cable-stuffed broadcasting facilities.

■ Sending HD Signals Everywhere

HD-SDI signals can be transmitted only about 100 meters over standard coaxial cables (5C-FB). This means that when wiring rooms and buildings with coaxial cables, it's sometimes difficult to achieve an optimal layout or position equipment where it will be most convenient and useful.

Further, signal transmissions often need to cover unexpectedly long distances, and fiber optic cables, with their transmission distance measured in tens of kilometers, win hands-down over coaxial cables. This flexibility alleviates much of the conventional worry about cable routing and allows the equipment itself to take center stage.

The cost of optical signal converters has dropped radically, too—most can be had for a few hundred dollars—making it difficult these days to find reasons not to introduce fiber optic systems!

Diversified Needs for Optical Conversion

■ It is not just the HD-SDI signal


It is not just the HD-SDI signal that is converted into optical signals. For example, there is a case in which the HD-SDI signal is converted into optical signals along with the control signal to transmit video images during recording in a studio. Converting various signals into optical signals allows them to be transmitted through fiber-optic cables, eliminating the necessity of separately preparing metal cables.

■ Advantages of Fiber Optic Transmission in the Field

With it now so easy to convert transmissions into optical signals, fiber optic systems are better suited than ever to field recording applications. Newly developed extra-strong, extra-bendable optical fibers have finally reduced past concerns about cable durability, meaning that in applications like remote broadcasting, video, audio and other signals can all be transmitted on a single cable, one of the inherent merits of fiber optic systems.



Cable Diameters

Even with 100 cores (lines), a fiber optic cable has an external diameter of just 11.5 mm. Compare that to a typical coaxial cable and the difference is clear.

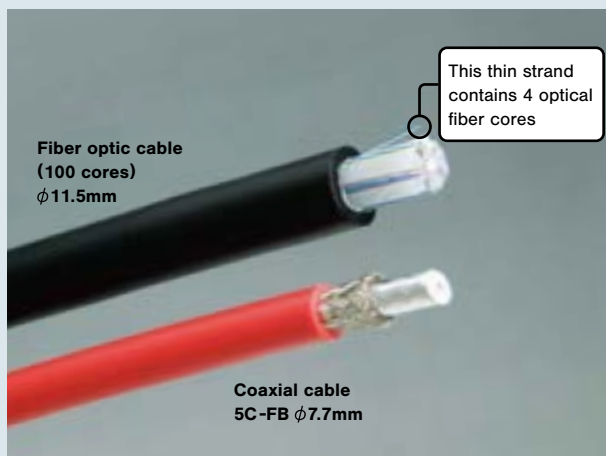

Example of an Optical Fiber Trunk Line

Fiber optic systems are used in signal transmissions within a single broadcast station, or between a main building and an annex building.

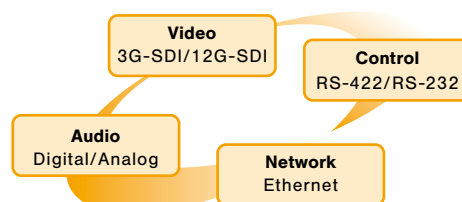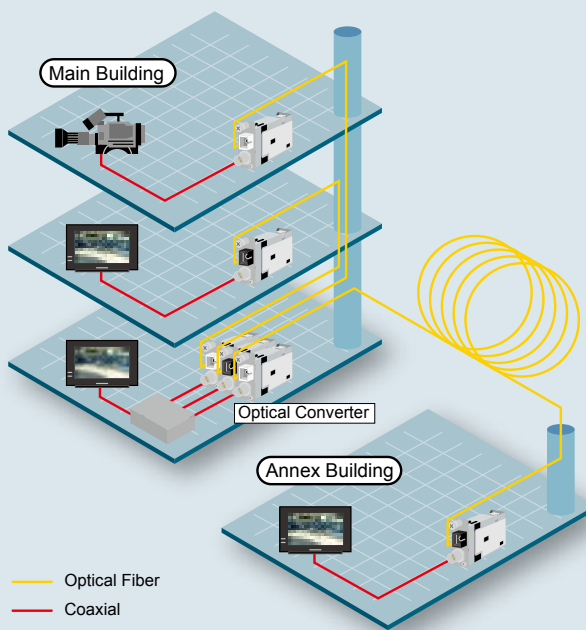

Tough & Flexible HFO Camera Cable




(See page 21)

Important Fiber Optic Line Considerations

Light Receiving Power

In optical transmission, transmission quality is evaluated by the relationship between "light receiving power" and "error rate." Error rate is dependent upon the signal to noise ratio (S/N), but since the noise level is thought of as being at a set level independent of the signal strength, the strength of the signal (light receiving power) at the receiver influences S/N considerably, in turn affecting the error rate. Therefore, to maintain a specified transmission quality, it is necessary to design light receiving power to be above the minimum light receiving power of the receiver. The graph at right is an example showing the light receiving power and error rate within the combination of a TX and a RX. From this graph, we can estimate that to get an error rate of 2×10^{-18} (to ensure a probability of 1 for transmission errors during 10 years of continuous operation), the light receiving power of the RX must be set greater than -24.3 dBm assuming the signal source and the TX are connected with a coaxial cable 1 meter in length (SMPTE connection standard).

If the signal source and the TX are connected by a coaxial cable 190 meters in length, then the light receiving power of the RX must be more than -23.6 dBm, from which we can see that the light receiving power deteriorates by about 1 dB as compared with the connection standard.

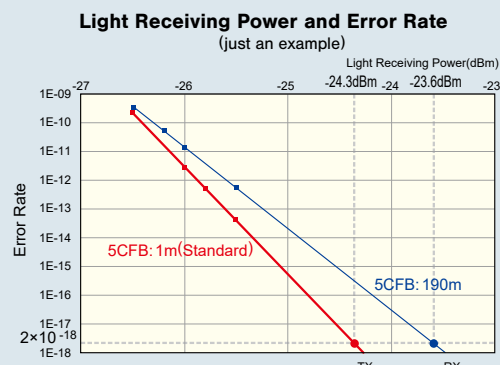


Loss Budget (LB)

Loss budget is the difference between the optical power output (P1) from the EO converter and the light reception sensitivity (P2) of the OE converter.

$$LB = P1 - P2$$

Example) If the optical power output P1 = -2.5 dBm and the reception sensitivity P2 = -22 dBm :

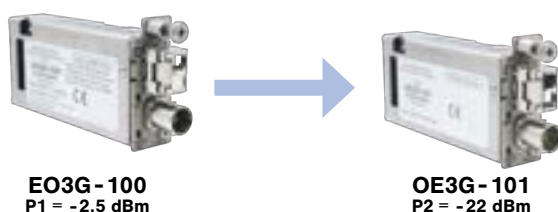


$$LB = -2.5 \text{ dBm} - (-22 \text{ dBm}) = 19.5 \text{ dB}$$

In EO/OE system design, 1) cable attenuation loss, 2) connector insertion loss, 3) fusion splice connection loss, and 4) Mux/Demux insertion loss must be calculated so that they are less than the loss budget (LB) of the optic link.

For SDI system, since the loss of Mux/Demux is greater than that of the fiber attenuation loss, it would be essential you to consider such loss factors when you configure the system.

Loss Budget Diagram

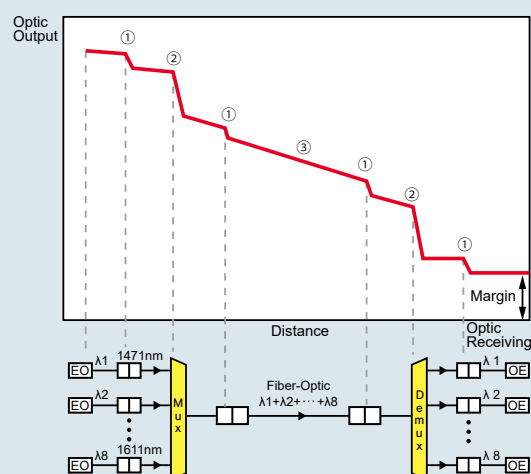

Loss Attenuation

Loss Factor	Value
① Connector Insertion Loss	0.5 dB/Point
② Mux/Demux	2~3 dB/Point
③ Fiber Cable	0.3 dB/km(*)
Splitter	0.5 dB/Main 10 dB/Branch
Divider	3 dB/Point
Fusion Splice Loss	0.2 dB/Point
System Margin	2~6 dB

* 0.5~1.0 dB/km for Dark fiber

Fiber - Optic Systems

Overview

Wavelength Multiplexing Systems

■ Multiplexing

"Multiplexing" is a technology that allows multiple signals with different wavelengths to be transmitted together over a single optical fiber. Three general types of multiplexing – WDM, CWDM and DWDM – offer increasing signal-carrying capacities, as described below.

Wavelength Division Multiplexing (WDM)

WDM is the simplest form of multiplexing and uses two wavelengths of 1310nm and 1551nm. Unlike when using and optical divider, insertion loss can be kept below 0.5dB.

Coarse Wavelength Division Multiplexing (CWDM)

CWDM systems use 8 wavelengths (20nm grid) primarily between 1471nm and 1611nm. To these it is also possible to add 8 more between 1271nm and 1451nm to allow a maximum of 16 wavelengths to be carried as a single multiplexed transmission. An ultra-thin membrane filter on the optical multiplexer/demultiplexer (mux/demux) keeps insertion loss at just 2-3dB.


*CWDM standardized through ITU G695.

■ Optical Converter (TX for CWDM)

Canare's CWDM optical converter uses a DFB laser, which offers a much tighter spectrum than FP lasers. Up to 16 different wavelengths fall within 1271nm and 1611 nm in 20nm intervals.

The wavelengths in the 20nm grid between 1391nm and 1411nm are not used because their proximity to the water peak results in too much attenuation.

Optical Fiber Transmission Loss Characteristics



■ Optical Multiplexer/Demultiplexers

The optical signals output from the optical converter (TX) are combined into a single signal by the multiplexer (mux) and transmitted along a single optical fiber. At the receiving end, these combined optical signals are demultiplexed (demux) to split them back into their original component 8 signals.

Optical mux/demuxers are bi-directional, so the same model can be used for transmitting and receiving on each end. It's also possible to use 4 wavelengths out of the 8 for transmitting and the remaining four for receiving. Both 8-wavelength and 16-wavelength models are available, and combining these with an optical converter allows a variety of system constructions with many uses.


■ Optical Converter (RX)

Canare's optical converter (RX) converts an optical signal comprised of 8 different wavelengths into electrical signals. This converter is common to all wavelengths and one converter is required for each wavelength.


Once optical fiber cables have been laid, multiplexing the transmissions carried on them eliminates the need to purchase and install new cables when more transmission lines are needed.

Eight Canare optical converters and an FCWDM-8B mux/demuxer can be installed compactly on a single 161UPSC 1RU-size platform, effectively allowing an 8-wavelength transmission system to be achieved in just 1RU of space.

Multiplexing (CWDM)

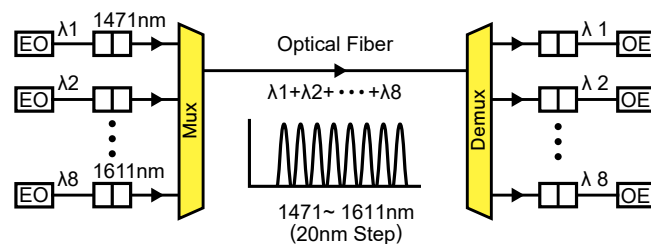

8-wavelength CWDM system example

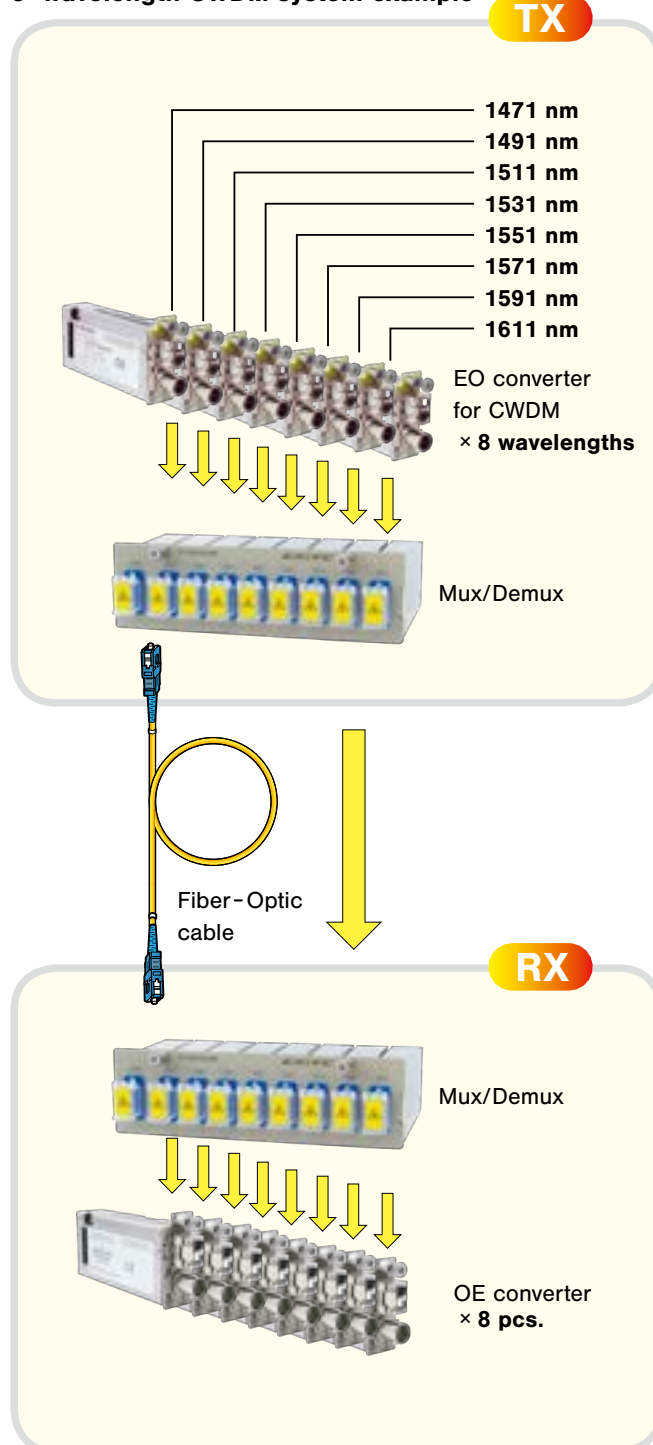

Note: Please use with Canare platform.

12G-SDI EO/OE Converters

■ Electric to Optic Converter (TX)

Model	Wavelength	Emission	Occupancy
EO12G-100B	1310 nm	-2 dBm	1 slot
EO12G-100A-**	1271~1451nm for CWDM*	-1 dBm	1 slot

*Refer to the following information to specify the wavelength and the model number.

■ Optic to Electric Converter (RX)

Model	Wavelength	Sensitivity	Occupancy
OE12G-101B	1260~1650 nm	-13 dBm	1 slot

Key Features and Benefits

- Supports 12G/6G/3G/HD/SD-SDI and DVB-ASI
- Capable of Pathological Test Pattern transmission (SMPTE RP-178, 198 Check Field Test Pattern)
- Super low latency
- Compact size
- No complicated settings
- 3-color LED signal indication

■ Specifications

Model	EO12G-100B	EO12G-100A-**	OE12G-101B
Convertibility	Electric to Optic		Optic to Electric
Fiber Type	Single Mode		
Optical Input	N/A		1 × LC
Optical Output	1 × LC		N/A
SDI Input	1 × 75Ω BNC		N/A
SDI Output	N/A		1 × 75Ω BNC
Dimensions	17 × 43.4 × 78.4 mm		
Weight	Approx. 95 g		
Standards	SMPTE ST 2082-1, 2081-1, 424, 297-1, 292-1, 259, EN50083-9		

Website

EO12G-100B
12G-SDIOE12G-101B
12G-SDI

Ordering Information for EO12G-100A-**

EO12G-100A-	27	Wavelength
	27	1271nm
	29	1291nm
	31	1311nm
	33	1331nm
	35	1351nm
	37	1371nm
	43	1431nm
	45	1451nm

EO12G-100A-**
12G-SDI

Note: Platform is required for power supply (page 16).

12G-SDI Repeater

Equalizes and reclocks SDI signals to extend the transmission distance over a coaxial cable.

Model	Supporting Signals	Occupancy
EE12G-100	12G/6G/3G/HD/SD-SDI, DVB-ASI	1 slot

Key Features and Benefits

- Supports 12G/6G/3G/HD/SD-SDI and DVB-ASI
- 12G-SDI cable equalization: 100 m over L-5.5CUHD (Typ.)
- 3-color LED signal indication
- Allows for efficient use of existing cable infrastructure.


■ Specifications

I/O Connectors	2 × 75Ω BNC
Standards	SMPTE ST 2082-1, 2081-1, 424, 292-1, 259, EN50083-9

EE12G-100
12G-SDI

Dimensions: 17 × 43.4 × 78.4 mm
Weight: 85g

Example of Use

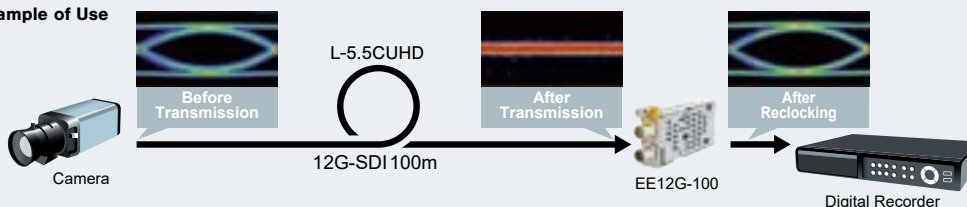

Note: Platform is required for power supply (page 16).

Fiber - Optic Systems

EO/OE Converters

3G - SDI EO/OE Converters

■ Electric to Optic Converter (TX)

Model	Wavelength	Emission	Monitor Out	Occupancy
EO3G-100	1310 nm	-2.5 dBm	No	1 slot
EO3G-200	1310 nm	-2.5 dBm	Yes	2 slots
EO3G-100A-**	1271-1611 nm for CWDM*	+2.5 dBm	No	1 slot

*Refer to the following information to specify the wavelength and the model number.

■ Optic to Electric Converter (RX)

Model	Wavelength	Sensitivity	Dual Out	Occupancy
OE3G-101	1200-1620 nm	-22 dBm	No	1 slot
OE3G-201	1200-1620 nm	-22 dBm	Yes	2 slots

Key Features and Benefits

- Supports 3G/HD/SD-SDI and DVB-ASI
- Capable of Pathological Test Pattern transmission (SMPTE RP-178, 198 Check Field Test Pattern)
- Super low latency
- Compact size
- No complicated settings
- Cost effective

■ Specifications

Model	EO3G-100	EO3G-200	EO3G-100A	OE3G-101	OE3G-201
Convertibility	Electric to Optic			Optic to Electric	
Optical Connector	1 × LC (output)			1 × LC (input)	
Fiber Type	Single Mode				
SDI Input	1 × 75Ω BNC	1 × 75Ω BNC	1 × 75Ω BNC	N/A	N/A
SDI Output	N/A	1 × 75Ω BNC (no-re-clock)	N/A	1 × 75Ω BNC	2 × 75Ω BNC
Dimensions (mm)	17 × 43.4 × 78.4	35.5 × 43.4 × 78	17 × 43.4 × 78.4	17 × 43.4 × 78.4	35.5 × 43.4 × 78
Weight (approx.)	100 g	150 g	95 g	100 g	150 g
Standards	SMPTE ST 259, 292-1, 297-1, 424, EN50083-9				

Website



EO3G-100



EO3G-200
(with Monitor Output)



OE3G-101



OE3G-201
(with Dual Output)

Ordering Information for EO3G-100A-**

EO3G-100A- **27** - Wavelength

27	1271nm	47	1471nm
29	1291nm	49	1491nm
31	1311nm	51	1511nm
33	1331nm	53	1531nm
35	1351nm	55	1551nm
37	1371nm	57	1571nm
43	1431nm	59	1591nm
45	1451nm	61	1611nm





EO3G-100A-**

Note : Platform is required for power supply (page 16).

Technical Note

Jitter

The timing deviation of the periodic signal waveform is called jitter. For serial data signals such as SDI signals, jitter occurs due to the deviation of reference clock signal, reflection caused by connection through coaxial cables or between devices, loss of DC and high frequency components, the influence of noise from the equipment itself or from the outside. In the worst case, an error occurs in clock data recovery due to this jitter and that with SDI signals, noise may appear on the screen or signal transmission may come to be fail.



AES 3id Optical Converters


End of Sale

Model	Wavelength	Emission	Sensitivity	Occupancy
EO-500-**	1471-1611 nm for CWDM*	-3 dBm	N/A	5 slots
OE-501	1200-1620 nm	N/A	-26 dBm	

* Refer to the following information to specify the wavelength.

Key Features and Benefits

- Multiplex and optically convert AES signals from up to 8 ports (16 audio channels) to allow them to be transmitted over long distance.
- Supports 8 wavelengths CWDM; enables max. 64 ports (128 audio channels) signals to transmit over a single optical fiber.
- AES-3id-1995 and SMPTE 276M
- Fully asynchronous multiplex transmission.
- Word clock can be transmitted (30kHz to 50kHz).
- Dolby-E compatible

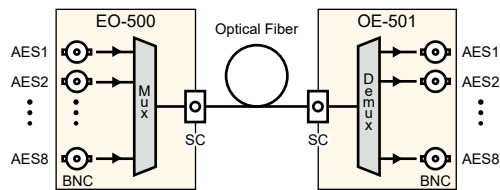

Specifications

Model	EO-500-**	OE-501
Convertibility	Electric to Optic	Optic to Electric
Fiber Type	Single Mode	
Optic Connector	1 × SC (output)	1 × SC (input)
AES I/O Connector	8 × 75Ω BNC (input)	8 × 75Ω BNC (output)
Dimensions	91 × 43.4 × 76.2 mm	
Weight	174 g	
Standards	AES-3id-1995, SMPTE ST 276	



EO-500-55



OE-501

Ordering Information for EO-500-**

EO-500- 47	Wavelength
47	1471nm
49	1491nm
51	1511nm
53	1531nm
55	1551nm
57	1571nm
59	1591nm
61	1611nm

Note: Platform is required for power supply (page 16).


Analog Audio Optical Converters

Model	Wavelength	Occupancy	Remark
TRM-540	1310 nm	5 slots	Work with TRM-541.
TRM-541	1550 nm		Work with TRM-540.
TRM-540A-**	1471-1611 nm for CWDM (*1)		Work with TRM-540A-** of a different wavelength (*2).

*1) Refer to the following information to specify the wavelength and the model number.
 *2) TRM-540A-** does not work with TRM-540 or TRM-541.

Key Features and Benefits

- Enables line level audio signals to transmit long distance over a fiber-optic cable.
- 8 channel transmission (4-channel inputs/4-channel outputs)
- Maximum input/output voltage: +24 dBu (balanced)
- Supports 600Ω input by each channel with selector switches.

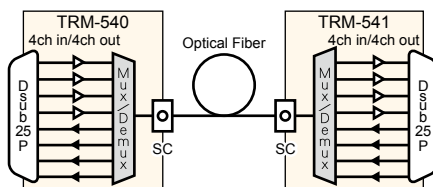

Block Diagram of TRM-540 and TRM-541

Specifications

Model	TRM-540, TRM-541	TRM-540A-**
Fiber Type	Single Mode	
Optic I/O Connector	1 × SC	2 × LC
Audio I/O Connector	1 × D sub 25 pin (F)	
Frequency Response	20 Hz - 40 kHz (-3 dB, +0.1 dB)	
Dimensions	91 × 43.4 × 78.4 mm	
Weight	265 g	



TRM-540



TRM-540A-**

Ordering Information for TRM-540A-**

TRM-540A- 47	Wavelength
47	1471nm
49	1491nm
51	1511nm
53	1531nm
55	1551nm
57	1571nm
59	1591nm
61	1611nm

Note: Platform or Stand Alone Kit required for power supply (page 16).

Fiber - Optic Systems

EO/OE Converters


1000BASE-T Optical Converters

Model	Wavelength	Occupancy	Remark
TRM-300-G31	1310 nm	2 slots	Work with TRM-300-G55.
TRM-300-G55	1550 nm		Work with TRM-300-G31.
TRM-300A-G**	1471-1611 nm for CWDM (*1)		Work with TRM-300A-G** of a different wavelength (*2).

*1) Refer to the following information to specify the wavelength and the model number.
*2) TRM-300A-G** does not work with TRM-300-G31 or TRM-300-G55.

Key Features and Benefits


- Media converters for Gigabit Ethernet 1000BASE-T*
- *No backwards compatibility with other Ethernet standards such as 100BASE-TX.
- Super-low latency: less than 1 micro-second.
- Extends communications up to 20 km (condition: line loss 0.5 dB/km)
- Bi-directional optical communication

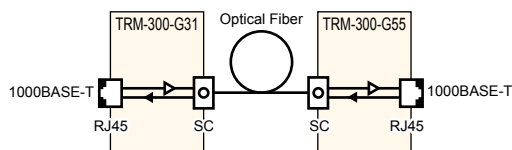

Block Diagram of TRM-300-G31 and TRM-300-G55

Specifications

Model	TRM-300-G31, TRM-300-G55	TRM-300A-G**
Fiber Type	Single Mode	
Optic I/O Connector	1 × SC	2 × LC
Ethernet I/O Connector	1 × RJ45	
Dimensions	35.5 × 43.4 × 76 mm	
Weight (approx.)	155 g	
Standards	IEEE 802.3ab (1000BASE-T)	

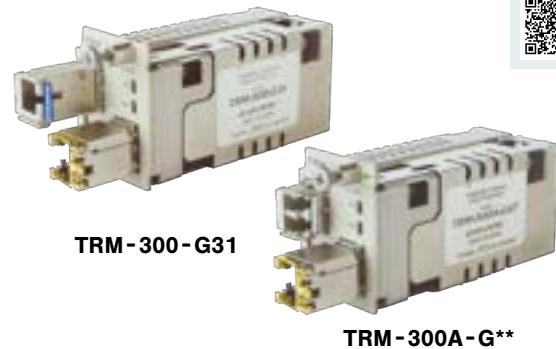

Website

Ordering Information for TRM-300A-G**

TRM-300A-G	Wavelength
47	1471nm
49	1491nm
51	1511nm
53	1531nm
55	1551nm
57	1571nm
59	1591nm
61	1611nm

Note: Platform is required for power supply (page 16).


100BASE-TX Optical Converters

Model	Wavelength	Occupancy	Remark
TRM-210	1310 nm	2 slots	Work with TRM-211.
TRM-211	1550 nm		Work with TRM-210.
TRM-210A-**	1471-1611 nm for CWDM (*1)		Work with TRM-210A-** of a different wavelength (*2).

*1) Refer to the following information to specify the wavelength and the model number.
*2) TRM-210A-** does not work with TRM-210 or TRM-211.

Key Features and Benefits

- Media converters for Fast Ethernet 100BASE-TX*
- *No backwards compatibility with other Ethernet standards such as 10BASE-T.
- Auto MDI/MDX
- Extends communications up to 30 km (condition: line loss 0.5 dB/km)
- Bi-directional optical communication

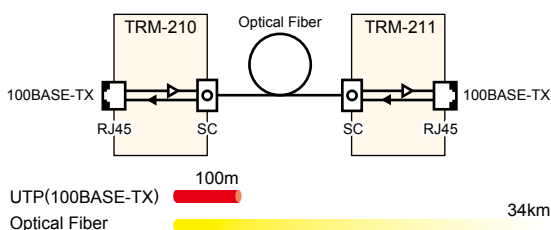

Block Diagram of TRM-210 and TRM-211

Specifications

Model	TRM-210, TRM-211	TRM-210A-**
Fiber Type	Single Mode	
Optic I/O Connector	1 × SC	2 × LC
Ethernet I/O Connector	1 × RJ45	
Dimensions	35.5 × 43.4 × 76.2 mm	
Weight (approx.)	103 g	110 g
Standards	IEEE 802.3u (100BASE-TX)	



Website

Ordering Information for TRM-210A-**

TRM-210A-	Wavelength
47	1471nm
49	1491nm
51	1511nm
53	1531nm
55	1551nm
57	1571nm
59	1591nm
61	1611nm

Note: Platform is required for power supply (page 16).


RS-422/RS-232 Optical Converters

Model	Wavelength	Occupancy	Remark
TRM-220	1310 nm	3 slots	Work with TRM-221.
TRM-221	1550 nm		Work with TRM-220.
TRM-220A-**	1471-1611 nm for CWDM (*1)		Work with TRM-220A-** of a different wavelength (*2).

*1) Refer to the following information to specify the wavelength and the model number.
 *2) TRM-220A-** does not work with TRM-220 or TRM-221.

Key Features and Benefits

- TIA-422, SMPTE ST 207, RS-232
- Usable in a case of RS-422 <=> RS-232
- Extends communications up to 30 km (condition: line loss 0.5 dB/km)
- Bi-directional optical communication

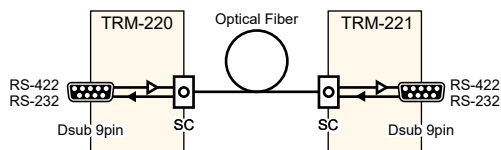

Block Diagram of TRM-220 and TRM-221

Specifications

Model	TRM-220, TRM-221	TRM-220A-**
Fiber Type	Single Mode	
Optic I/O Connector	1 × SC	2 × LC
Serial I/O Port	1 × Dsub 9 pin (F)	
Max. Data Rate	RS-422: 10 Mbps, RS-232: 1 Mbps	
Dimensions	54 × 43.4 × 76.2 mm	
Weight (approx.)	110 g	120 g
Standards	TIA-422, SMPTE ST 207, RS-232C	

Ordering Information for TRM-220A-**

TRM-220A- [47]	Wavelength
47	1471nm
49	1491nm
51	1511nm
53	1531nm
55	1551nm
57	1571nm
59	1591nm
61	1611nm

Note: Platform is required for power supply (page 16).

More Converters

Model	Occupancy
TRM-100	3 slots
TRM-101	

Multiplex and optically convert HD-SDI and RS-485 signal to transmit long distance over a fiber-optic cable. Suited for HD surveillance camera system.




Model	Occupancy
TRM-400	3 slots
TRM-401	

Multiplex and optically convert analog video, stereo audio, RS-422, and relay signals to transmit long distance over a fiber-optic cable.



Model	Occupancy
TRM-230	3 slots
TRM-231	

Multiplex and optically convert 7 of each input/output relay signal and RS-422/232 signals to transmit long distance over a fiber-optic cable.

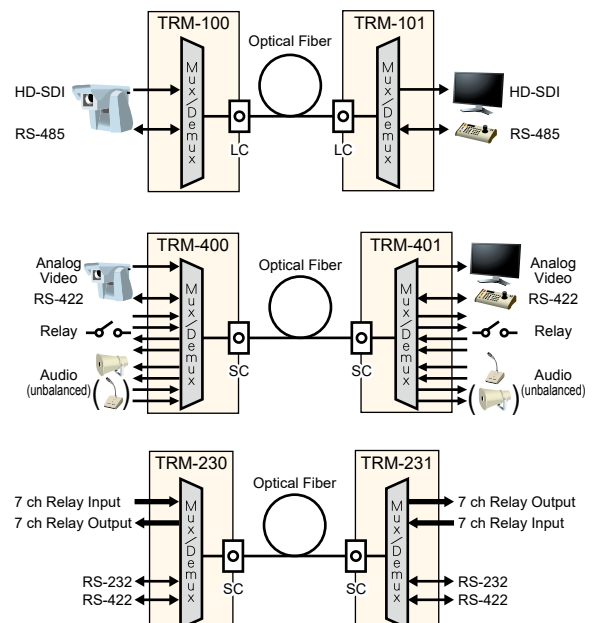

Note: Platform or Stand Alone Kit required for power supply (page 16).

Website



IP Connectivity Products

Technical Trend

Fiber-Optic Systems

Connectors

Cables

Panels & Patchbays

Multichannel Systems

Cable Assemblies

Fiber - Optic Systems

Mux/Demux, Splitter

CWDM Mux/Demux

Slot-in Module Types

Model	Ch.	Wavelengths	Occupancy
FCWDM-8B	8	1471-1611 nm	8 slots
FCWDM-8B-13	8	1271-1451 nm	


Rack Mount Types

Model	Ch.	Wavelengths	Size
FCWDM8/1A	8	1471-1611 nm	1RU
FCWDM8/1A-13	8	1271-1451 nm	
FCWDM8/2A	2 each of 8	2 each of 1471-1611 nm	
FCWDM8/2A-13	2 each of 8	2 each of 1271-1451 nm	
FCWDM16A	16	1271-1611 nm	

Key Features and Benefits

- Bi-directional 8 or 16 wavelengths.
- Passive and stand-alone products.
- Easy to use - Just plug in SC-type connectors.
- FCWDM-8B(-13) can be loaded into 161UPSC; enables 8-wavelength CWDM within 1RU frame.

<Loading example (rear view of 161UPSC)>

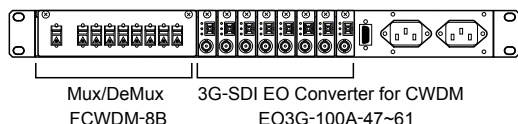

Specifications

Model	FCWDM-8B (-13)	FCWDM8/1A (-13)	FCWDM8/2A (-13)	FCWDM16A
Connectors	SC			
Passband	± 6.5 nm (ITU-T G.695)			
Min. Passband Ripple	0.5 dB			
Max. Insertion Loss*	2.0 dB			3.3 dB
Min. Isolation	30 dB			
Dimensions (mm)	146 × 43.4 × 94.2	482.6 × 44 × 362.3		
Weight (approx.)	210 g	1700 g	1800 g	1890 g
Wavelengths Details (nm)	1271-1451: 1271/1291/1311/1331/1351/1371/1431/1451 1471-1611: 1471/1491/1511/1531/1551/1571/1591/1611			

* Insertion loss includes ripple, PDL, and connector loss



FCWDM-8B



FCWDM8/1A
(Rear View)



FCWDM8/2A
(Rear View)



FCWDM16A
(Rear View)



Website


Optical Splitter

Model	Wavelength	Description
FDM-2	1261-1611nm	1 × 2 Splitter for Single Mode Fiber
FDM-4		1 × 4 Splitter for Single Mode Fiber

Key Features and Benefits

- Divides single optical input into multiple optical output.
- Passive and stand-alone products.
- Can be loaded into platform for Canare plug-in unit.
- Easy to use - Just plug in SC-type connectors.
- Low insertion loss.

Insertion Loss

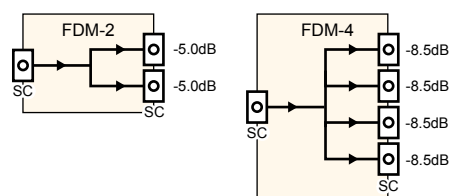

FDM-2

Slot Occupancy: 3 slots
Dimensions: 54 × 43.4 × 82 mm
Weight: 83g



FDM-4

Slot Occupancy: 4 slots
Dimensions: 72 × 43.4 × 82 mm
Weight: 110g



Website

Platform

Power supply for Canare plug-in modules. The robust 1RU rack mountable and space efficient portable types are available.

Model	Description	Number of Slots
161UPSC-**	1RU rack mount type	16
6PSC-**	Portable type	6
2PSC	Palm size	2
PSM2-**	Redundant power supply module for 161UPSC	N/A

Note: 161UPSC shall be used in countries where CE marking directive is not applied. Contact Canare for details.

Key Features and Benefits

- Compact design – Maximum 16 modules within 1RU
- Hot swappable
- 161UPSC can be output 4 types of alarm signals via Dsub 9P (F).
- 161UPSC provides power redundancy by adding a PSM2.

Specifications

Model	161UPSC	6PSC	2PSC
Number of Slots	16	6	2
AC Input Voltage	100 to 240V 50/60Hz 0.35A		N/A
DC Input Voltage	N/A	10 to 18V	10 to 18V
Max Power Consumption (exclusive of modules)	22W	4.5W (AC) 2.2W (DC)	2.2W
Power Connector	AC3P Jack	AC3P Jack (AC) XLR4 Male (DC)	XLR4 Male
Supply Voltage to Module	DC 5V		
Operating Temperature	-10 to 40 deg C		

Stand Alone Kit

Model	For	Description
WMM0190	TRM with power input (TRM-100/230/400/540)	a clamping bracket (one side)
WEPZ0258		AC 100-240V to DC 5V adapter, Plug Type A No CE marking

Key Features and Benefits

- Operates a TRM converter without a Platform.
- Simple and cost-effective method
- Used in combination of two WMM0190 and WEPZ0258.

Website



161UPSC-**

Dimensions: 434 × 44 × 340 mm
Weight: 4500g



6PSC-**

Dimensions: 210 × 44 × 165 mm
Weight: 650g



2PSC

Dimensions: 90 × 44 × 110 mm
Weight: 200g

Website



WMM0190



2 of WMM0190 with TRM



WEPZ0258

Fiber - Optic Systems

HFO Transmission Devices

HFO Transmission Device (Quad-link)

Transmit 4-channel SDI over a HFO camera cable.

■ FCBK4-12G **12G-SDI**

Support 12G/6G/3G/HD/SD-SDI and DVB-ASI

Model	HFO Connector	EO/OE Modules	EXT Connector	IDX V-plate
FCBK4-FF5W1-12G	FCFRA (Female)	4 × OE12G-101B (RX)	XLR5 Female	No
FCBK4-FF5W1-12G-PV	FCFRA (Female)	4 × OE12G-101B (RX)	XLR5 Female	Yes
FCBK4-FM5W2-12G	FCMRA (Male)	4 × EO12G-100A-** (TX)	XLR5 Male	No
FCBK4-FM5W2-12G-PV	FCMRA (Male)	4 × EO12G-100A-** (TX)	XLR5 Male	Yes

FCBK4-FM5W2-12G



FCBK4-FF5W1-12G

■ FCBA4-3G

Support 3G/HD/SD-SDI and DVB-ASI

Model	HFO Connector	EO/OE Modules	EXT Connector	IDX V-plate
FCBA4-FF5W1	FCFRA (Female)	4 × OE3G-101 (RX)	XLR5 Female	No
FCBA4-FF5W1-PV	FCFRA (Female)	4 × OE3G-101 (RX)	XLR5 Female	Yes
FCBA4-FM5W2	FCMRA (Male)	4 × EO3G-100A-** (TX)	XLR5 Male	No
FCBA4-FM5W2-PV	FCMRA (Male)	4 × EO3G-100A-** (TX)	XLR5 Male	Yes



(rear view)

Key Features and Benefits

- All-in-one device which combines four EO/OE modules and a power supply unit.
- The best solution for Quad-link 12G/3G-SDI outside broadcasting.
- Flexible configuration by replacing EO/OE modules.
- AC and DC input redundancy
- Optical SC connector for optional use

* Canare OC series (Hybrid-OPS profile) is also available. Please contact us for more details.

■ Specifications

Type	without V-plate	with V-plate
SDI connector	4 × 75Ω BNC	
Optical connector	SC (for optional use)	
AC input	AC 3P Jack	
DC input	XLR4-32-F77 (Male)	
Power requirement	AC 100-240 V, DC 10-18 V	
Operating Temp.	-10 to 40 deg C	
Dimensions	210 × 42 × 240 mm	
Weight	1800 g	1850 g

FCBA4-FM5W2




FCBA4-FF5W1



FCBA4-FM5W2-PV

<Example of Use>

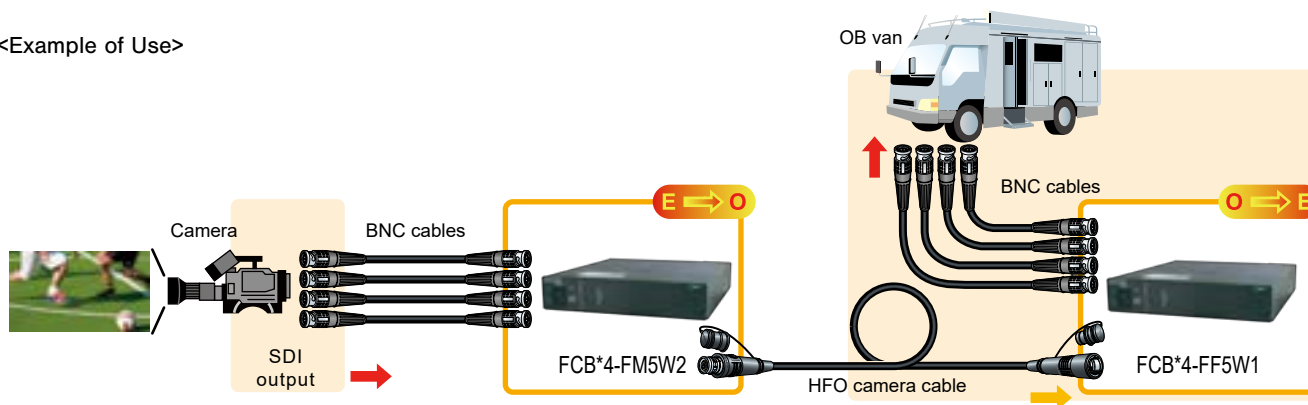

HFO Transmission Device (Bi-directional)

Transmit 2-channel SDI over a HFO camera cable.

FCBK-12G **12G-SDI**

Support 12G/6G/3G/HD/SD-SDI and DVB-ASI

Model	HFO Connector	EO/OE Modules	EXT Connector	IDX V-plate
FCBK-FF3W1-12G	FCFRA (Female)	EO12G-100B (TX) OE12G-101B (RX)	2 × XLR3 Female	No
FCBK-FF3W1-12G-PV	FCFRA (Female)	EO12G-100B (TX) OE12G-101B (RX)	2 × XLR3 Female	Yes
FCBK-FM3W2-12G	FCMRA (Male)	EO12G-101B (RX) OE12G-100B (TX)	2 × XLR3 Male	No
FCBK-FM3W2-12G-PV	FCMRA (Male)	EO12G-101B (RX) OE12G-100B (TX)	2 × XLR3 Male	Yes

FCBK-FM3W2-12G



FCBK-FF3W1-12G

FCBA-3G

Support 3G/HD/SD-SDI and DVB-ASI

Model	HFO Connector	EO/OE Modules	EXT Connector	IDX V-plate
FCBA-FF3W1-3G	FCFRA (Female)	EO3G-100 (TX) OE3G-101 (RX)	2 × XLR3 Female	No
FCBA-FF3W1-3G-PV	FCFRA (Female)	EO3G-100 (TX) OE3G-101 (RX)	2 × XLR3 Female	Yes
FCBA-FM3W2-3G	FCMRA (Male)	EO3G-101 (RX) OE3G-100 (TX)	2 × XLR3 Male	No
FCBA-FM3W2-3G-PV	FCMRA (Male)	EO3G-101 (RX) OE3G-100 (TX)	2 × XLR3 Male	Yes



(rear view)

Key Features and Benefits

- All-in-one device which combines two EO/OE modules and a power supply unit.
- Ideal for outside broadcasting.
- Flexible configuration by replacing EO/OE modules.
- AC and DC input redundancy

* Canare OC series (Hybrid-OPS profile) is also available. Please contact us for more details.

Specifications

Type	without V-plate	with V-plate
SDI connector	2 × 75Ω BNC	
AC input	AC 3P Jack	
DC input	XLR4-32-F77 (Male)	
Power requirement	AC 100-240 V, DC 10-18 V	
Operating Temp.	-10 to 40 deg C	
Dimensions	210 × 42 × 240 mm	
Weight	FCBK-12G	1400 g
	FCBA-3G	1200 g

FCBA-FM3W2-3G




FCBA-FF3W1-3G



FCBA-FM3W2-3G-PV


<Example of Use>

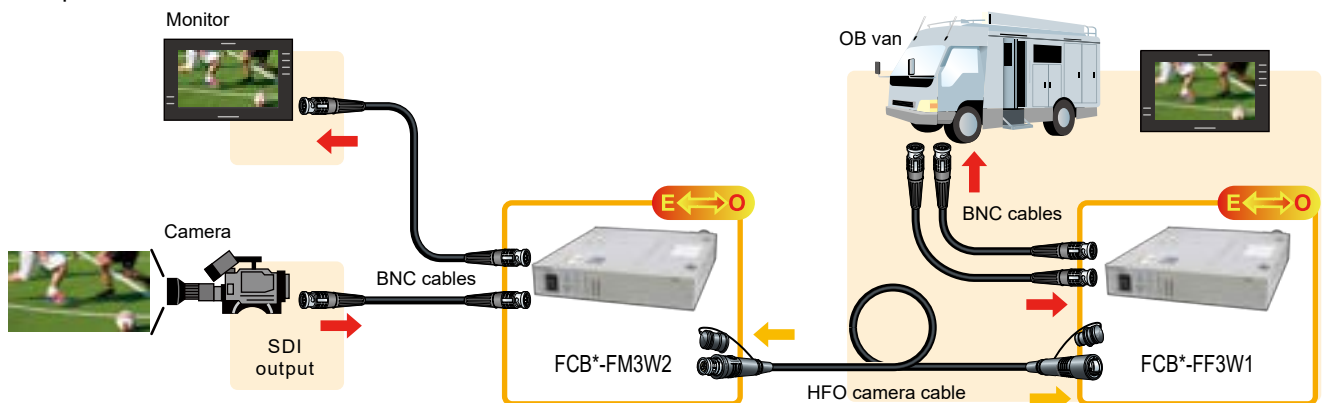

Fiber - Optic Systems

HFO Camera Cables

Hybrid Fiber-optic Camera Cables (SMPTE ST 311)

Type	Model	Sales Units (m)	Nom. O.D. (mm)	Weight kg/100m	Outer Jacket	Overall Shield	Tension Tolerance (N)	Strength Member O.D. (mm)	Min. Bend Radius	Temp. Range (deg C)	Channel Unit		
											Fiber	Aux. (Power)	Signal (Control)
 LF-2SM9N Jacket color: BLK	LF-2SM9N	Call	9.2	12.0	Abrasion-resistance PVC	9/24/0.10TA 91%	700	2.6	6 × Nom. O.D.	-40 to +75	2 × SM 9/125 (low-water-peak) Unit O.D. 0.9 mm	4 × 20 AWG 21 / 0.18TA Unit O.D. 1.7 mm	2 × 25 AWG 7 / 0.18TA Unit O.D. 1.2 mm
	LF-2SM16		16	29.0	Double PVC								


LF-2SM9N

- For general use.
- Abrasion-resistance Jacket enhance the adaptability to all studio and outside broadcast applications.
- Cost effective

Website





Cross Section

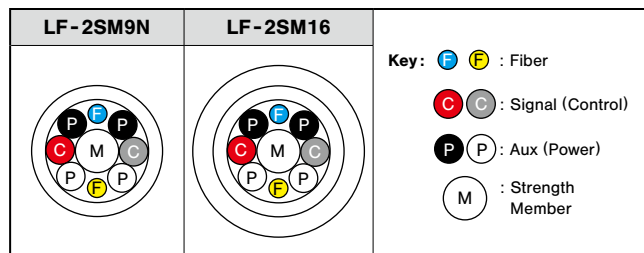

LF-2SM16

- For studio use.
- O.D. 16mm Double Jacket prevents the cable from being jammed under a camera pedestal dolly.

Camera to CCU

Type	Model	Length (m)
 Jacket color: BLK	FCC10N	10
	FCC20N	20
	FCC25N	25
	FCC35N	35
	FCC50N	50
	FCC100N	100
 Jacket color: BLK	FCC150N	150
	FCC200N	200
	FCC30A-WJ	30
	FCC50A-WJ	50
	FCC100A-WJ	100

- Standard and widely-used models.
- Heat shrink tubes help in labeling.
- FCC**A-WJ prevents the cable from being jammed under a camera pedestal dolly by its O.D. 16mm double jacket.
- 7-color connector rings included.
- * Canare OC series (Hybrid-OPS profile) is also available. (see page 23)

Website



FCC**N

Website



FCC**A-WJ




FCFA



FCMA



Color Rings

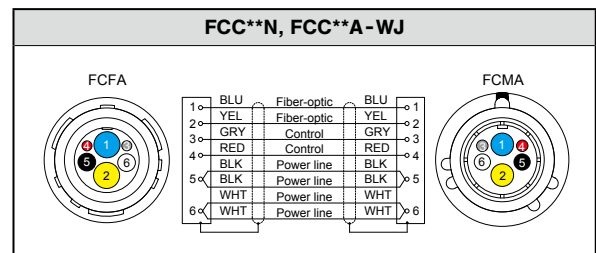

Wiring Diagram

HFO Protective Covers

Any-time-fit-on protector for SMPTE connector - the new traditional

Model	Shape	Component	Color
FC-CV-F-SET-**	Female	1 × Boot	RD: Red GR: Green
FC-CV-M-SET-**	Male	1 × Holder	YL: Yellow BK: Black

Please specify the color such as FC-CV-F-SET-**RD**

Cover: PVC, Holder: PE

- Canare exclusive retrofittable construction (patent pending)
- Fit for Canare FC series and other SMPTE 304 plugs
- Heavy-duty and harsh environment applications
- Quality verified over shock resistance tests

Website




- * Not available for Canare OC series
- * The male and female are for FCMA and FCFA or equivalent respectively.




FC-CV-F-SET-GR



FC-CV-M-SET-RD

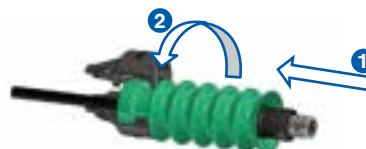

Slim Hybrid Fiber-optic Camera Cable

Type	Model	Sales Units (m)	Nom. O.D. (mm)	Weight kg/100m	Outer Jacket	Overall Shield	Tension Tolerance (N)	Strength Member O.D. (mm)	Min. Bend Radius	Temp. Range (deg C)	Channel Unit		
											Fiber	Aux. (Power)	Signal (Control)
	LF-2SM7N	Call	7.1	7.3	Abrasion-resistance PVC	8/24/0.10TA 91%	300	1.4	6 × Nom. O.D.	-40 to +75	2 × SM 9/125 (low-water-peak) Unit O.D. 0.9 mm	2 × 20 AWG 21 / 0.18TA Unit O.D. 1.7 mm	2 × 25 AWG 7 / 0.18A Unit O.D. 1.2 mm
Jacket color: BLK													

LF-2SM7N


- O.D. 7 mm of slim profile and approx. 40% lighter than LF-2SM9N.
- Best fit for mobile applications.
- The power transmission distance is approx. twice as long as the previous model LF-2SM7R.

Website



Note: The power transmission distance is shorter than typical HFO camera cables (approx. 50% of LF-2SM9N). Please contact us for more information.

Cross Section

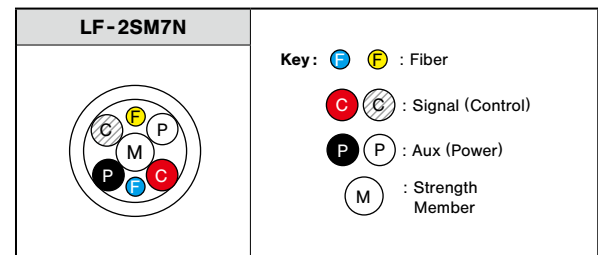

FCF7A




FCM7A



Color Rings

Camera to CCU


Type	Model	Length (m)
	FCC10-7N	10
	FCC20-7N	20
	FCC30-7N	30
	FCC50-7N	50
	FCC100-7N	100
Jacket color: BLK		

- Equipped with slim and lightweight cable.
- FCC100-7N is approx. 5 kg lighter than typical 100m HFO camera cable as FCC100N.
- Heat shrink tubes help in labeling.
- 7-color connector rings included.

Website



Note: The power transmission distance of FCC**-7N is approx. half of that of the FCC**N.
* Canare OC series (Hybrid-OPS profile) is also available. (see page 23)

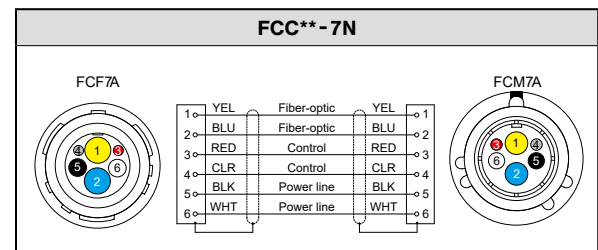


FCC**-7N

Fiber - Optic Systems

HFO Camera Cables

Tough & Flexible HFO Camera Cables

Thermoplastic polyurethane type jacket offers amazing flexibility and superior mechanical properties; Crush Resistance, Impact Resistance and Cyclic Flexing exceed that of MIL.

Type	Model	Sales Units (m)	Nom. O.D. (mm)	Weight kg/100m	Outer Jacket	Overall Shield	Tension Tolerance (N)	Strength Member O.D.	Min. Bend Radius	Temp. Range (deg C)	Channel Unit		
											Fiber	Aux. (Power)	Signal (Control)
 Jacket color: BLK DEEP RED DEEP GRN	LF-2SM9T	Call	9.2	9.8	TPU + PVC	N/A	1500	1.8 mm + Tensile strength fiber	Equal to Nom. O.D.	-40 to +75	2 x SM 9/125 (low-water-peak) Unit O.D. 0.9 mm	4 x 20 AWG 102 / 0.08A Unit O.D. 1.75 mm	2 x 25 AWG 24 / 0.08A Unit O.D. 1.2mm
 Jacket color: BLK	LF-2SM7T	Call	7.1	5.5	TPU + PVC	N/A	1000	0.63 mm + Tensile strength fiber	Equal to Nom. O.D.	-40 to +75	2 x SM 9/125 (low-water-peak) Unit O.D. 1.7 mm	2 x 23 AWG 60 / 0.08A Unit O.D. 1.4 mm	2 x 26 AWG 30 / 0.08A Unit O.D. 1.1 mm

LF-2SM9T

- Heavy-duty yet Flexible.
- Ideal for remote broadcast applications.
- Minimum bend radius: 9.2 mm.

Website





LF-2SM7T


- Flexible, Slim, Lightweight, and moreover, Heavy-duty.
- Ideal for short-distance remote broadcast applications of up to 200 meters.
- O.D. 7.1 mm and weighing only 5.5 kg/100 m, it's so easy to carry around.
- Minimum bend radius: 7.1 mm.
- Fiber units include tensile strength fiber.

Note: The power supply distance of LF-2SM7T is shorter than other HFO camera cables. (approx. 30% of LF-2SM9N)
LF-2SM7T requires a special technique during a connector assembly, so you can buy the cable assemblies shown below.

Cross Section

LF-2SM9T	LF-2SM7T
	
Key: F1 F2 : Fiber C1 C2 : Signal (Control) P1 P2 : Aux (Power) P3 P4 : Aux (Power) S1 S2 : Ground M : Strength Member # : Tensile Strength Fiber	Key: F1 F2 : Fiber + Tensile Strength Fiber C1 C2 : Signal (Control) P1 P2 : Aux (Power) S : Ground M : Strength Member # : Tensile Strength Fiber

Camera to CCU

Type	Model	Length (m)
 Jacket color: BLK DEEP RED DEEP GRN	FCC10-9T	10
	FCC20-9T	20
	FCC25-9T	25
	FCC35-9T	35
	FCC50-9T	50
	FCC100-9T	100
 Jacket color: BLK	FCC150-9T	150
	FCC200-9T	200
	FCC10-7T	10
	FCC20-7T	20
	FCC30-7T	30
	FCC50-7T	50
	FCC100-7T	100

- Tough & Flexible cable
- Fit for mobile applications in harsh environments.
- Heat shrink tubes help in labeling.
- 7-color connector rings included.

Website



FCC** - 9T

Website



FCC** - 7T

Note: The power transmission distance of FCC** - 7T is quite shorter than typical HFO camera cables.

* Canare OC seires (Hybrid-OPS profile) is also available. Please contact us for more details.



FCC** - 7T





FCFA, FCF7A





FCMA, FCM7A



Color Rings

FCC** - 9T		
	1 YEL Fiber-optic YEL 2 BLU Fiber-optic BLU 3 RED Control RED 4 GRN Control GRN 5 BLK Power line BLK 6 BLK Power line BLK 7 WHT Power line WHT 8 WHT Power line WHT 9 CLR Ground CLR 10 CLR Ground CLR	

Wiring Diagram

FCC** - 7T		
	1 YEL Fiber-optic YEL 2 BLU Fiber-optic BLU 3 RED Control RED 4 CLR Control CLR 5 BLK Power line BLK 6 WHT Power line WHT 7 GRN Ground GRN	

Wiring Diagram

Fiber - Optic Systems

HFO Camera Cables

HFO Camera Cable Assemblies (Japanese Style)

Canare OC hybrid camera connectors are commonly used in Japan and Asian countries. It includes the same combination of SMPTE 304 but different pinouts. Improved reliabilities and advanced maintenance features.



OC connectors

Symmetric pinout
Finger detachable insulator
Better grip, proper connections
SMPTE 311 cable ready
Camera MFGs accepted
Hybrid - OPS profile



FC connectors

SMPTE and ARIB standard
Detachables insulator with tool
Widely used in the market
Hybrid - 3K profile

Camera to CCU

O C C 1 0 0 - N

Series name

Cable mount plugs
Male and female

Lengths

01 = 1 meters
100 = 100 meters
Call for stocked lengths.

Cable type

N : LF-2SM9N O.D. 9 mm PVC Jacket (most common)
WJ : LF-2SM16 O.D. 16 mm PVC Jacket
7N : LF-2SM7N O.D. 7 mm PVC Jacket
9T : LF-2SM9T O.D. 9 mm TPU Jacket w/o Shield
7T : LF-2SM7T O.D. 7 mm TPU Jacket w/o Shield
TPU = Thermoplastic Polyurethane

Website



OCFA



OCMA

Panel to CCU

O C C 0 5 N - F R C M

Series name

PNL mount M to
cable mount F
and vice versa

Lengths

05 = 5 meters
10 = 10 meters
Call for custom lengths.

Connector type

FRCM : OCFCRB-OCMA
FMRC : OCMRCA-OCFA

Website



OCFCRB



OCMRCA

Cable type: LF-2SM9N

Pigtails

O C S 0 1 5 - F R

Series name

OC breakout


Lengths

015 = 1.5 meters
Call for custom lengths.

Connector type

FR : OCFRA to 2 × SC, 1 × Nylon
MR : OCMRA to 2 × SC, 1 × Nylon

Website

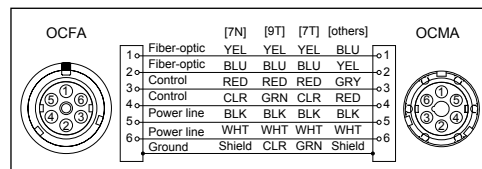

Wiring Diagram for OCC



OCS015-FR

SMPTE Conversion

F C M 0 2 N - O C F

Connector A

FCM : FCMA
FCF : FCFA

Lengths

02 = 2meters
Call for custom lengths.


Connector B

OCF : OCFA
OCM : OCMA

Website




Cable type: LF-2SM9N
Call for custom models.

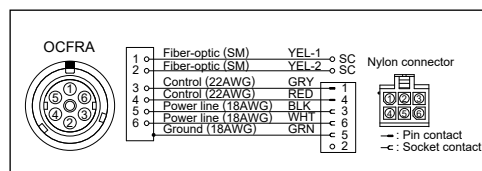

Wiring Diagram for OCS



FCF02N-OCM

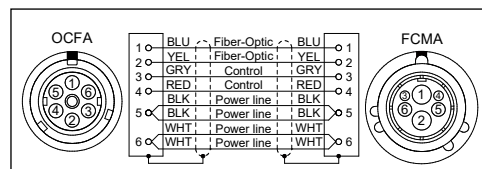

Wiring Diagram for Conversion

Hybrid Fiber-Optic Camera Cable Checker

Canare Cable Checker allows fast, easy confirmation of HFO cables in the field. No heavy equipment to drag around. The compact design features a backlight digital display to measure optic loss/power and electrical continuity. Small and light, Canare Cable Checker helps make mobile installations smooth, secure and constant.

Kit Model	Individual Model	
	Measuring Unit	Loop-back Unit
FCT-FCKIT RED	FCT-FC RED	FCT-FCLB RED
FCT-OCKIT RED	FCT-OC RED	FCT-OCLB RED

Key Features and Benefits

- Check hybrid camera cables instantly
- Indicating optic power and loss, electrical open-circuit and short-circuit at the same time
- Available in two most common hybrid camera connector interfaces
- All-in-one kit includes storage box, leather case, AA batteries, and CLETOP

Specifications

Kit Model	FCT-FCKIT RED	FCT-OCKIT RED
Connector	Canare FC series (SMPTE/ARIB)	Canare OC series (Hybrid-OPS)
LD	FP-LD	
Wavelength	1310 nm	
Output Power	-2.5 dBm	
Sensitivity	-24 to -2 dBm	
Maximum Length	3.5 km (Canare LF-2SM9N)	
Optic Signals	Optical Power and Loss	
Electric Signals	Open-circuit and Short-circuit	
Battery/Life	2 pcs of AA/ Approx. 20hours	
Operating Temperature	-10 to 60 deg C	
Dimensions	Measuring Unit: 46 × 46 × 150 mm Loop-back Unit: 46 × 46 × 65 mm	
Weight	Measuring Unit: 380 g Loop-back Unit: 170 g	
Accessories	Storage case, carrying cases, AA Batteries, and cleaning sticks	

CE, FCC, FDA registered
US Patent No.7113678

Note: Red cap model will not work with black cap model.


Website



Carrying Cases



Storage Case

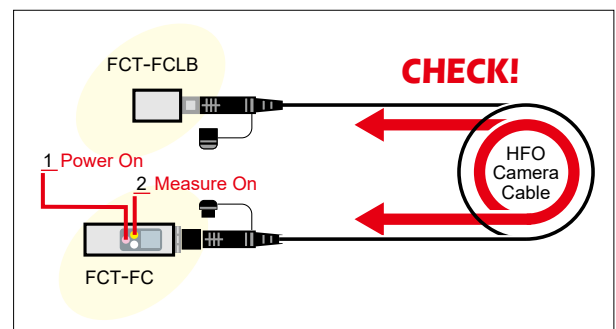

⚠ To prevent the product from being damaged, please NOTE the following points before connection:


- Discharge static electricity from HFO camera cable by grounding its metal part.
- Connect the Loop-back Unit first.
- Do not connect anything other than the Cable Checker and HFO camera cable.

Technical Note

Maintaining Hybrid Fiber-Optic Camera Connectors

The connector sections to be cleaned are the key parts, including the tips and sides of ferrules, the interior walls of alignment sleeves and the interior and exterior of connector shells. Note that scratches and particles of foreign matter on the tip of the ferrule can have a disabling effect on fiber-optic transmission. The following procedures should be used when cleaning hybrid fiber-optic camera connectors.

- For Plugs, the interior surfaces of alignment sleeves and the tips of ferrules are to be cleaned with the non-alcohol treated cleaning stick using a gentle stroking action. Canare FCFA and FCFRA enhance easy cleaning procedure for its innovative alignment sleeve and insulator detachable design. US Patent: No.7241055B2, JP Patent: No.4340186



- For Jacks, it is important to clean both the tips and sides of the completely protruding ferrules with the cleaning stick.
- Both the male and female connector shells tend to attract dust and metal particles, so it is important to clean both the insides and outsides using cotton gauze or similar material.



Before cleaning



After cleaning

Cleaning Stick Model: CLETOP 2.5/2.0

- Compact and disposable
- Allows cleaning both the tips and sides of ferrules
- Manufactured by NTT-AT

Cleaning stick
CLETOP 2.5/2.0



IBC Brand Cleaner M-20 Model: 14347 CLEANER

- Easy "one-push" cleaner
- Allows cleaning the tips of ferrules without removing alignment sleeve
- Manufactured by US Conec

IBC Brand Cleaner M-20
14347 CLEANER



Fiber - Optic Systems

HFO Camera Connector Panels

Hybrid Fiber-optic Camera Connector Panels

Pre-terminated HFO camera connector panel with built-in splice enclosure box provides easy and quick installation between HD camera system and terminal panel or rack. By combining the unit and frame, HFO camera connector panel enables a variety of layouts depending on the system design.

Website




■ COPS Series (SMPTE)


Model	Panel Size	HFO Connectors* (Assembly)
COPS-FF3A	Wall Mount Type 3RU Height, W: 197.6mm	2 × FCFRA (FCS003A-FR)
COPS-FM3A		2 × FCMRA (FCS003A-MR)
COPS-FF2A	Wall Mount Type 2RU Height, W: 197.6mm	2 × FCFRA (FCS003A-FR)
COPS-FM2A		2 × FCMRA (FCS003A-MR)
COPS3-FF3A	Rack Mount Type 3RU	6 × FCFRA (FCS003A-FR)
COPS3-FM3A		6 × FCMRA (FCS003A-MR)
COPS3-FF2A	Rack Mount Type 2RU	6 × FCFRA (FCS003A-FR)
COPS3-FM2A		6 × FCMRA (FCS003A-MR)

*HFO connectors are pre-terminated. (length: 0.3 m)


*Canare OC series (Hybrid-OPS profile) is also available. Please contact us for more details.

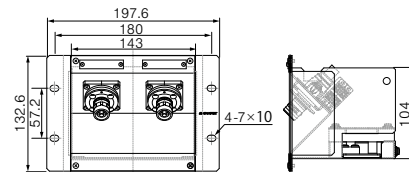


COPS-FF3A

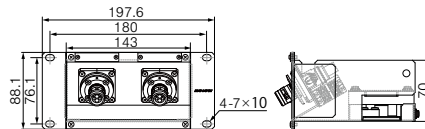

COPS-FF2A

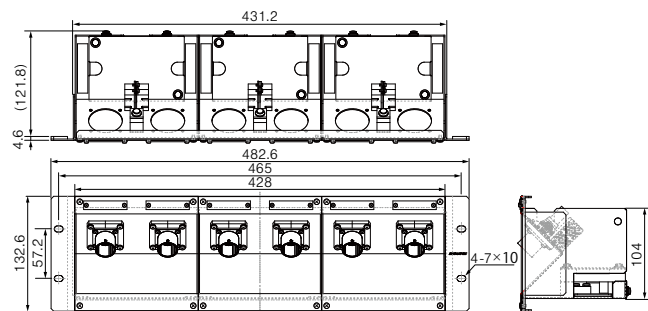


COPS3-FM3A

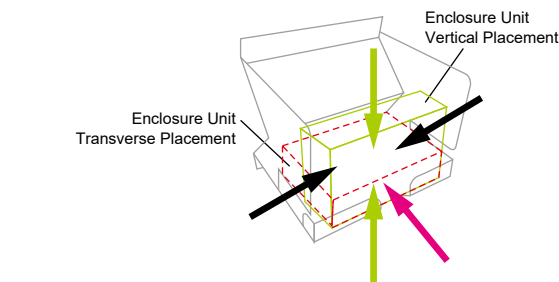

5 directions of cabling
as indicated by colored arrows

- Vertical/Transverse placement
- Transverse placement
- Vertical placement

5 - directional Wiring
JP Patent No.4388540

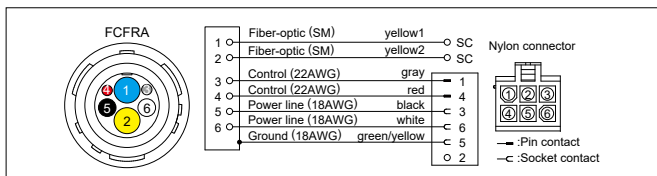

Wiring Diagram

Accessories:

Fiber-optic cable w/SC connector (2m), grounding cable, nylon connector, pin contact, socket contact, tie-band, fusion splice protection sleeve, splice holder, color-coded tube, mounting screw, laser warning label.

Note: Assembly tools for the nylon connectors are NOT include.
(AMP 91529-1: 26 to 22 AWG and AMP 91536-1: 20×2 to 16 AWG)

Individual Frame and Unit


Model	Height	Description
COUS-FF3A	3RU	Connector Unit of COPS(3)-FF3A
COUS-FM3A		Connector Unit of COPS(3)-FM3A
COF-13C		Frame of COPS (for 1 unit)
COF-33B		Frame of COPS3 (for 3 units)
COUS-FF2A	2RU	Connector Unit of COPS(3)-FF2A
COUS-FM2A		Connector Unit of COPS(3)-FM2A
COF-12B		Frame of COPS (for 1 unit)
COF-32A		Frame of COPS3 (for 3 units)

*HFO connectors are pre-terminated. (length: 0.3 m)


*Canare OC series (Hybrid-OPS profile) is also available. Please contact us for more details.

Optional Parts

Model	Type	Suitable Frame/Unit
COU-BP3A	Blank Panel	COF-13A, COF-33B (3RU frames)
COU-BP2A		COF-12A, COF-32A (2RU frames)
COU-CV3	Top Cover	COUS-FF3A, COUS-FM3A (3RU units)
COU-CV2		COUS-FF2A, COUS-FM2A (2RU units)

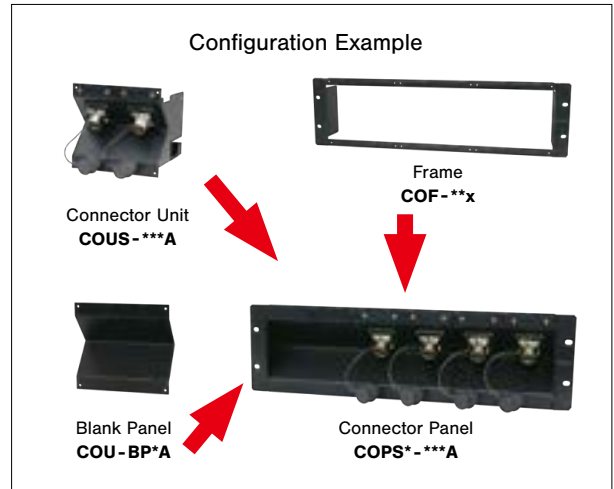

<Example of Use>

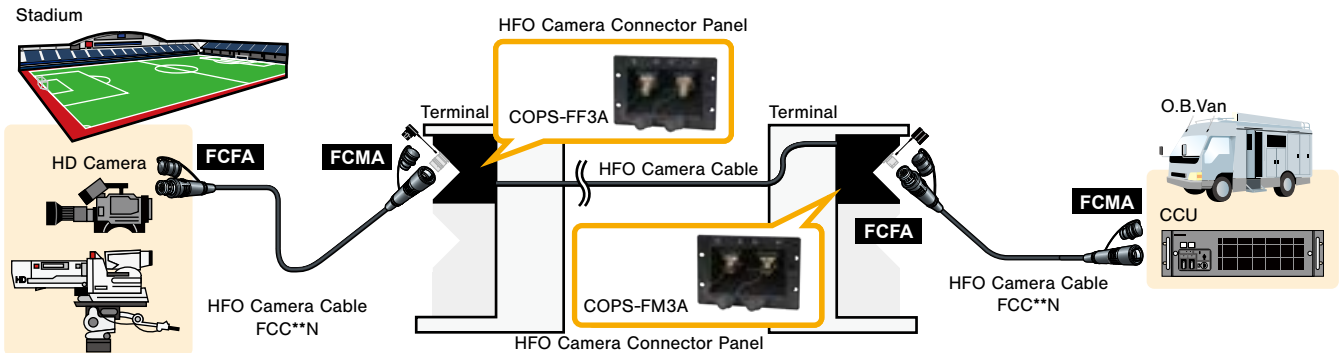

Hybrid Fiber-optic Splice Enclosures


The optimized fiber-optic splice enclosures for use with HFO camera cables.

Model	No. of cables (capacity)	No. of splice trays	No. of Adapters	
			SC	Nylon
FCE-2	2	1	4	2
FCE-4	4	2	8	4
FCE-6	6	3	12	6

- Used to protect fusion splice connection parts
- Designed for use with LF-2SM9N
- Easy cable installation
- Can be placed vertically or horizontally
- Detachable brackets and a connector protection cover
- Insulated tension member clamp

Note :

The following tools are required for installing the nylon connector.
AMP 91529-1 (26 to 22 AWG) and AMP 91536-1 (20 × 2 to 16 AWG)

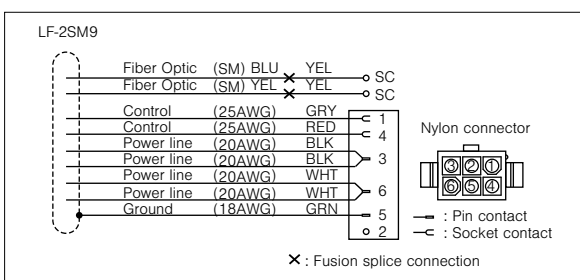


Wiring Diagram



FCE-2

Accessories:
Fiber-optic cable w/SC connector (2m), splice holder, fusion splice protection sleeve, nylon connector, pin contact, socket contact, tie band, grounding cable, color-coded tube.

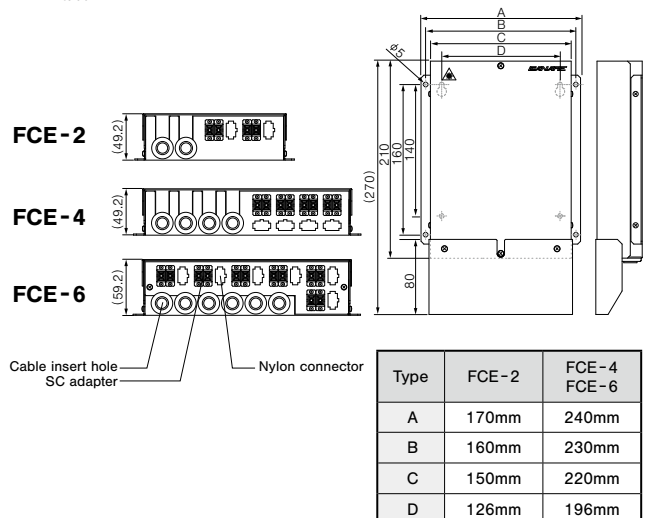

Fiber - Optic Systems

Fiber - optic Cables

6 - channel Fiber - optic Snakes

Type	Model	Length (m)
	OM6C10	10
	OM6C20	20
	OM6C25	25
	OM6C35	35
	OM6C50	50
	OM6C100	100
	OM6C150	150
	OM6C200	200

Jacket color: **BLK**

- Ruggedized multichannel fiber-optic assemblies with robust 6-fiber connector
- Single-mode, ITU-T G.657.A2 low bending loss and low water-peak fiber
- Abrasion-resistance cable jacket
- Tensile strength: 700 N or less
- Return loss: 45 dB or greater ($\lambda = 1.3 \mu\text{m}$)
- Insertion loss: 0.5 dB or greater ($\lambda = 1.3 \mu\text{m}$)
- 7-color connector rings included.
- Blue dust cap makes it easier to distinguish OM6 from HFO camera connectors.



- Canare OM6 connectors are NOT compatible with other multichannel/hybrid fiber-optic connectors.
- IBC brand "one-push" cleaner M-20 is highly recommended for cleaning OM6 connectors. (see page 24, model: 14347 CLEANER)



OM6PA



OM6JA







Color Rings

Website



6 - channel Fiber - optic Fantails

Type	Model	Length (m)
	OM6S003-PR	0.3
Jacket color: VEL IU-FCM-SET included		
	OM6S015-PR	1.5
Jacket color: VEL IU-FCM-SET included		
	OM6S003-JR	0.3
Jacket color: VEL IU-FCM-SET included		
	OM6S015-JR	1.5
Jacket color: VEL IU-FCM-SET included		

- OM6 receptacle with 6 SC single-mode fiber cord (2.0mm).
- Return loss: 45 dB or greater ($\lambda = 1.3 \mu\text{m}$)
- Insertion loss: 0.5 dB or greater ($\lambda = 1.3 \mu\text{m}$)
- Blue dust cap makes it easier to distinguish OM6 from HFO camera connectors.

- Canare OM6 connectors are NOT compatible with other multichannel/hybrid fiber-optic connectors.
- IBC brand "one-push" cleaner M-20 is highly recommended for cleaning OM6 connectors. (see page 24, model: 14347 CLEANER)



OM6PRA




OM6JRA

Website



■ Hole Dimensions

(with IU-FCM-SET)



Tactical Fiber-optic Cable



Particularly rugged multichannel fiber-optic cable designed for mobile applications.

Type	Model	No. of Ch.	Sales Units (m)	Nom. O.D. (mm)	Weight kg/100m	Tension Tolerance (N)	Strength Member	Min. Bend Radius	Temp. Range (deg C)	Fiber-optic Unit		
										Fiber	Attenuation	Unit O.D.
	LF-SM2T-4C	4	100 200 500	7.8	4.9	1400	Aramid yarn	Equal to Nom. O.D.	-55 to +85	SM 9/125 (low-water-peak)	1.6 dB/km @1310 nm	2.0 mm including aramid yarn


Jacket color: **BLK**

Jacket: TPU


LF-SM2T-4C

- Heavy-duty and high flexibility
 - * Crush resistance: 2,000 N/cm
 - * Impact resistance: 300 impacts
 - * Cycle flexing: 20,000 cycles
- Single-mode
- Color-coded breakout type unit
- Thermoplastic polyurethane jacket
- Aramid yarn strength member
- 4-channel cable best suited for Quad-link 3G-SDI signals.

Cross Section


LF-SM2T-4C	
	Key: F : Fiber + Aramid Yarn # : Aramid Yarn

Cable Assemblies

Type	Model	Length (m)
 Jacket color: BLK	4FS50T-SS	50
	4FS100T-SS	100
	4FS150T-SS	150
	4FS200T-SS	200
 Jacket color: BLK	4FS50T-LS	50
	4FS100T-LS	100
	4FS150T-LS	150
	4FS200T-LS	200
 Jacket color: BLK	4FS50T-ST	50
	4FS100T-ST	100
	4FS150T-ST	150
	4FS200T-ST	200

Single-mode Fiber-optic Cables (Multichannel)






Type	Model	No. of Ch.	Sales Units (m)	Nom. O.D. (mm)	Weight kg/100m	Outer Jacket	Tension Tolerance (N)	Min. Bend Radius	Temp. Range (deg C)	Fiber-optic Unit		
										Fiber	Attenuation	Unit O.D.
 LF-SM2-6C Jacket color: YEL	LF-SM2-2C	2	Call	7.4	5.4	PVC	290	10 x Nom. O.D.	-40 to +75	SM 9/125 + Aramid yarn + PVC jacket	0.5 dB/km @1310nm	2.0 mm including aramid yarn
	LF-SM2-4C	4		7.4	5.5		290					
	LF-SM2-6C	6		9.0	7.3		300					
	LF-SM2-8C	8		10.0	10.4		780					
	LF-SM2-12C	12		12.8	14.2		780					
	LF-SM2-16C	16		14.7	16.3		780					
	LF-SM2-24C	24		15.0	18.3		780					



- Smooth PVC Jacket
- Including a central strength member and a rip cord.

Fiber - Optic Systems

Fiber - optic Cables

Single-mode Fiber Optic Patch Cables

Type	Model	Length (m)
SC - SC 	FS3C002A-S	0.2
	FS3C003A-S	0.3
	FS3C005A-S	0.5
	FS3C007A-S	0.7
	FS3C01A-S	1
	FS3C02A-S	2
	FS3C03A-S	3
	FS3C04A-S	4
	FS3C05A-S	5
Jacket color: YEL Cable O.D.: 3 mm		
SC - SC 	FS2C002A-SS	0.2
	FS2C003A-SS	0.3
	FS2C005A-SS	0.5
	FS2C007A-SS	0.7
	FS2C01A-SS	1
	FS2C02A-SS	2
	FS2C03A-SS	3
	FS2C04A-SS	4
	FS2C05A-SS	5
Jacket color: YEL Cable O.D.: 2 mm		
SC - LC 	FS2C002A-SS/LS	0.2
	FS2C003A-SS/LS	0.3
	FS2C005A-SS/LS	0.5
	FS2C007A-SS/LS	0.7
	FS2C01A-SS/LS	1
	FS2C02A-SS/LS	2
	FS2C03A-SS/LS	3
	FS2C04A-SS/LS	4
	FS2C05A-SS/LS	5
Jacket color: YEL Cable O.D.: 2 mm		

Type	Model	Length (m)
LC - LC 	FS2C002A-LS	0.2
	FS2C003A-LS	0.3
	FS2C005A-LS	0.5
	FS2C007A-LS	0.7
	FS2C01A-LS	1
	FS2C02A-LS	2
	FS2C03A-LS	3
	FS2C04A-LS	4
	FS2C05A-LS	5
Jacket color: YEL Cable O.D.: 2 mm		
LC - LC Duplex 	2FSZ2S005A-DLS	0.5
	2FSZ2S007A-DLS	0.7
	2FSZ2S01A-DLS	1
	2FSZ2S02A-DLS	2
	2FSZ2S03A-DLS	3
	2FSZ2S04A-DLS	4
	2FSZ2S05A-DLS	5
Jacket color: YEL Cable O.D.: 2 mm		


- ITU-T G.652.D/G.657.A2
- Low - water - peak
- Minimum bend radius: 10 mm

- Insertion loss: 0.5 dB max.
- Return loss: 50 dB max. (UPC)
- UL type OFNR

Website



Single-mode Fiber Optic Fantails

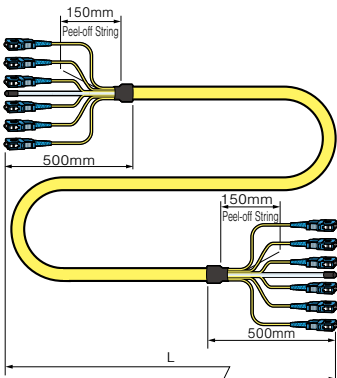Type	Channel	Model	Length (m)	Fiber Optic Cable		
				Part Number	Unit O.D. (mm)	Nom. O.D. (mm)
SC - SC 	2	2FS10-S	10	LF-SM2-2C	2	7.4
		2FS20-S	20			
		2FS50-S	50			
	4	4FS10-S	10	LF-SM2-4C		7.4
		4FS20-S	20			
		4FS50-S	50			
	6	6FS10-S	10	LF-SM2-6C		9.0
		6FS20-S	20			
		6FS50-S	50			
	8	8FS10-S	10	LF-SM2-8C		10.0
		8FS20-S	20			
		8FS50-S	50			
	12	12FS10-S	10	LF-SM2-12C		12.8
		12FS20-S	20			
		12FS50-S	50			
	16	16FS10-S	10	LF-SM2-16C		14.7
		16FS20-S	20			
		16FS50-S	50			
	24	24FS10-S	10	LF-SM2-24C		15.3
		24FS20-S	20			
		24FS50-S	50			




Jacket color: **YEL**

- Flexible cable with reliable bellcore boots
- Adjustable fantail length with peel-off string
- UPC polishing; Return loss ≥ 50 dB for single mode
- Transmission loss 0.5dB at $\lambda=1.31\mu\text{m}$ and 0.4dB at $\lambda=1.55\mu\text{m}$



Website



OM3 Multi-mode Fiber Optic Patch Cables

Type	Model	Length (m)
SC - SC  Jacket color: AQUA Cable O.D.: 3 mm	FM33C005-S	0.5
	FM33C01-S	1
	FM33C03-S	3
	FM33C05-S	5
SC - SC  Jacket color: AQUA Cable O.D.: 2 mm	FM32C005-SS	0.5
	FM32C01-SS	1
	FM32C03-SS	3
	FM32C05-SS	5
SC - LC  Jacket color: AQUA Cable O.D.: 2 mm	FM32C005-SS/LS	0.5
	FM32C01-SS/LS	1
	FM32C03-SS/LS	3
	FM32C05-SS/LS	5

- Fiber type: Multi-mode 50/125 OM3
- Typically used in 10 Gigabit Ethernet
- Minimum bend radius: 10 mm

Type	Model	Length (m)
LC - LC  Jacket color: AQUA Cable O.D.: 2 mm	FM32C005-LS	0.5
	FM32C01-LS	1
	FM32C03-LS	3
	FM32C05-LS	5
LC - LC Duplex  Jacket color: AQUA Cable O.D.: 2 mm	2FM3Z2S005-DLS	0.5
	2FM3Z2S01-DLS	1
	2FM3Z2S03-DLS	3
	2FM3Z2S05-DLS	5

- Insertion loss: 0.3 dB max.
- Return loss: 30 dB max. (PC)
- UL type OFNR


Website




OM3 Multi-mode Fiber Optic Fan-out Cables

Type	Model	Length (m)
SC - Open  Jacket color: AQUA	4FO-M3-015-SS	1.5
	4FO-M3-03-SS	3
	4FO-M3-05-SS	5

- 4-core Multimode 50/125 OM3 Ribbon Fiber
- Typically used in 10 Gigabit Ethernet
- Insertion loss: 0.3 dB max.
- Return loss: 30 dB max. (PC)

Type	Model	Length (m)
LC - Open  Jacket color: AQUA	4FO-M3-015-LS	1.5
	4FO-M3-03-LS	3
	4FO-M3-05-LS	5



- Ribbon fiber cable: 2.1 × 3.5 mm outer dimensions
- Fan-out unit: 2 mm outer diameter, 500 mm length
- Fan-out tubing: 8 mm outer diameter
- UL type OFNR



Website



Multi-core OM3 Multi-mode Fiber Optic Cables

Type	Model	No. of Ch.	Sales Units (m)	Nom. O.D. (mm)	Weight kg/100m	Tension Tolerance (N)	Min. Bend Radius	Temp. Range (deg C)	Fiber-optic Unit		
									Fiber	Attenuation	Dim. (mm)
 Jacket color: BLK Unit color: AQUA	LF-M32-4C-EM	4	Call	7.4	5.6	290	6 × Nom. O.D.	-20 to +60	MM 50/125	3 dB/km @850nm 1 dB/km @1300nm	2.0 (round)
	LF-M32-6C-EM	6		9.0	7.5	300					
	LF-M32-8C-EM	8		10.1	10.8	780					
 Jacket color: BLK Unit color: AQUA	LF-M3R4-12C-EM	12 (3×4 core)		7.4	5.6	300					1.5 × 2.5 (ribbon)

Jacket material: Flame retardant PE

- OM3 fiber; typically used in 10 Gigabit Ethernet.
- Including a central strength member and a rip cord.
- Each unit has aramid strength member.

75Ω BNC Crimp Plugs

Canare added the new BCP-D series for 12G-SDI. SMPTE ST 2082-1 fully compliant connector makes UHD solutions as simple as existing SDI systems. The world's highest quality BNC includes BCP-B for 3G-SDI, BCP-A/C for up to HD.

■ BCP-D Series **12G-SDI**

Return Loss: 20 dB @ 6 GHz, 15 dB @ 12 GHz

Model	Suitable Cable		Center Pin	Sleeve	Boot	Die Set
	Canare	Others				
BCP-D33UHD	L-3.3CUHD	—	BN1181	BN7003A	CB03	TCD-35CA
BCP-D55UHD	L-5.5CUHD	—	BN1175	B75004A	—	TCD-55UHD
BCP-D55UHW New	L-5.5CUHWS	—	BN1192	BN7014	CB055W	TCD-57C
BCP-D57	—	4794R	BN1192	BN7002	—	TCD-57C
BCP-D8UHD	L-8CUHD, L-8CHD	—	BN1174	BN7147	—	TCD-8HD*

* Standard package (20pcs/100pcs)

* Crimp tool for TCD-8HD is TC-2

■ BCP-B Series

Return Loss: 26.4 dB @ 3 GHz

Model	Suitable Cable		Center Pin	Sleeve	Boot	Die Set
	Canare	Others				
BCP-B25HD	L-2.5CHD, L-2.5CHLT	VDM230	B11015E	BN7129	CB02	TCD-35CA
BCP-B25HW	L-2.5CHWS, V4-2.5CHW	—	B11015E	BN7143	CB02	TCD-35CA
BCP-B26	—	1855A, 1855P	B11014E	BN7029C	CB02	TCD-35CA
BCP-B28	—	1855ENH, HD PRO 0.6/2.8 AF	B11015E	BN7052A	CB02	TCD-35CA
BCP-B3F	L-3CFB, V*-3CFB	—	B11015E	BN7003A	CB03	TCD-35CA
BCP-B31F	L-3CFW, V*-3CFW	—	B11015E	BN7015A	CB04	TCD-4CA TCD-451CA
BCP-B4F	L-4CHD, L-4CFB, V*-4CFB	1505A, 1505ANH, VPM2000, HD PRO 0.8/3.7 AF	B11016E	BN7015A	CB04	TCD-4CA TCD-451CA
BCP-B45HW	L-4.5CHWS	1694F	B11020D	BN7016	CB05A	TCD-35CA
BCP-B53	L-4.5CHD	1694A	B11020D	BN7046	CB05A	TCD-35CA
BCP-B56	—	HD PRO 1.0/4.8 AF	B11020D	BN7046	CB05A	TCD-35CA
BCP-B5F	L-5CFB, V*-5CFB	—	B11020D	B75004A	CB05A	TCD-5CF TCD-55FA
BCP-B51F	L-5CFW, V*-5CFW	—	B11020D	B75004A	CB05A	TCD-5CF TCD-55FA

* Standard package (20pcs/100pcs)

■ BCP-A Series

Return Loss: 26.4 dB @ 2 GHz, 20.8 dB @ 3 GHz (*1)

Model	Suitable Cable		Center Pin	Sleeve	Boot	Die Set
	Canare	Others				
BCP-A25	L-2.5C2V	—	BN1018A	BN7029C	CB02	TCD-35CA
BCP-A25F	L-2.5CFB	1855A, 8218, 1417B, 1418B	B11014E	BN7029C	CB02	TCD-35CA
BCP-A3	L-3C2VS, L-3C2V, V*-3C	—	B11014E	BN7003A	CB03	TCD-35CA
BCP-A31	L-3C2W	—	B11014E	BN7011	CB04	TCD-31C
BCP-A32	—	1506A, 1824A, 1825A, 1826A, 643948	B11016E	BN7026A	CB03	TCD-35CA
BCP-A3AHD	L-3C-AHD	—	B11016E	BN7003A	CB03	TCD-35CA
BCP-A3F	L-3CFB, V*-3CFB	—	B11015E	BN7003A	CB03	TCD-35CA
BCP-A4	LV-61S	8241, 8279, RG-59B/U	B11015E	BN7015A	CB04	TCD-4CA TCD-451CA
BCP-A42	—	1505F	B11016E	BN7011	CB04	TCD-31C
BCP-A4F	L-4CHD, L-4CFB, V*-4CFB	1505A, 1505ANH, 8212, 8241F, 9167, 9259, 9659, VPM2000, HD PRO 0.8/3.7 AF	B11016E	BN7015A	CB04	TCD-4CA TCD-451CA
BCP-A5	L-5C2VS, L-5C2V, V*-5C	—	B11016E	BN7016	CB05A	TCD-35CA
BCP-A52	L-5C2W	—	B11016E	BN7014	—	TCD-451CA
BCP-A55	—	1695A, VSD2001TS	B11020D	BN7045A	CB04	TCD-35CA
BCP-A5F	L-5CFB, V*-5CFB	—	B11020D	B75004A	CB05A	TCD-35CA
BCP-A77	LV-77S	8281F	B11016E	B75004A	CB05A	TCD-5CF TCD-55FA
BCP-VA3	V*-3C	—	B11014E	BN7052A	CB03	TCD-35CA
BCP-VA5	V*-5C	—	B11016E	BN7045A	CB05A	TCD-35CA

* Standard package (20pcs/100pcs).

*1 Excluding BCP-A25, BCP-A25F and BCP-A4


Note: Suitable die set for BCP-A5F is TCD-35CA; do not use TCD-5CF/TCD-55FA for BCP-A5F.

- Canare crimp design ensures quick and reliable installation.
- Gold plated "snap locks" center pin and beryllium copper outer contact.
- Elongated body design for stable finger grip.
- Position mark on the body makes it easier to check if the connector is locked.

Website




BCP-D55UHD



Return loss for BCP-D55UHD




BCP-B5F

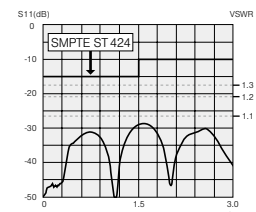

Return loss for BCP-B5F



BCP-A3

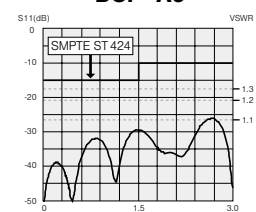

Return loss for BCP-A3

Be sure to use Canare Crimp Tool

■ BCP-C Series

Return Loss : 26.4 dB @ 2 GHz (*2)

Model	Suitable Cable		Center Pin	Sleeve	Boot	Die Set
	Canare	Others				
BCP-C1	L-1.5C2VS, V*-1.5C	83264, 83267	Solder	BN7022	CB01	TCD-1DB
BCP-C5HD	L-5CHD	—	BN1139	B75004A	CB05A	TCD-5HD
BCP-C6HD	L-6CHD	—	BN1083A	BN7074A	—	TCD-67HD
BCP-C71A	—	7731A, 9064, 9292, 1617A, 9011	BN1043A	BN7021A	—	TCD-7CA
BCP-C7FA	L-7CFB	—	BN1012B	BN7021A	—	TCD-7CA
BCP-C7HD	L-7CHD	—	BN1082A	BN7021A	—	TCD-67HD

• Standard package (20pcs/100pcs).

*2: Excluding BCP-C1

■ BCP-LC Series (Right Angle)

Return Loss : 26.4 dB @ 2 GHz

Model	Suitable Cable		Center Pin	Sleeve	Boot	Die Set
	Canare	Others				
BCP-LC3	L-3C2VS, L-3C2V, V*-3C	—	B11014E	BN7003A	—	TCD-35CA
BCP-LC3F	L-3CFB, V*-3CFB	—	B11015E	BN7003A	—	TCD-35CA
BCP-LC5	L-5C2VS, L-5C2V, V*-5C	—	B11016E	BN7016	—	TCD-35CA
BCP-LC5F	L-5CFB, V*-5CFB	—	B11020D	B75004A	—	TCD-5CF TCD-55FA

• Standard package (20pcs)

- Canare crimp design ensures quick and reliable installation.
- Gold plated "snap locks" center pin and beryllium copper outer contact.

Be sure to use Canare Crimp Tool



BCP-C6HD



BCP-LC3

75Ω Slim BNC Crimp Plugs

■ MBCP-C Series

Return Loss : 26.4 dB @ 1.5 GHz (*3)

Model	Suitable Cable		Center Pin	Sleeve	Boot	Die Set
	Canare	Others				
MBCP-C25F	L-2.5CFB	1855A, 8218, 1417B, 1418B	B11014E	BN7029C	—	TCD-35CA
MBCP-C3F	L-3CFB, V*-3CFB	—	B11015E	BN7003A	CB24	TCD-35CA
MBCP-C4	LV-61S	8241, 8279, RG-59B/U	B11015E	BN7015A	CB25	TCD-4CA TCD-451CA
MBCP-C4F	L-4CFB, V*-4CFB	1505A, 1505ANH, 8212, 8241F, 9167, 9259	B11016E	BN7015A	CB25	TCD-4CA TCD-451CA
MBCP-C53	L-4.5CHD	1694A, 9066, 9116, 9118, 9248	B11020D	BN7046	CB26	TCD-35CA
MBCP-C5F	L-5CFB, V*-5CFB	—	B11020D	B75004A	CB26	TCD-5CF TCD-55FA



• Standard package (20pcs)

*3: Excluding MBCP-C25F

- Slim design : O.D. 12 mm
- Compatible with 75Ω BNC receptacles.
- Canare crimp design ensures quick and reliable installation.
- Gold plated "snap locks" center pin and beryllium copper outer contact.

Be sure to use Canare Crimp Tool

Website

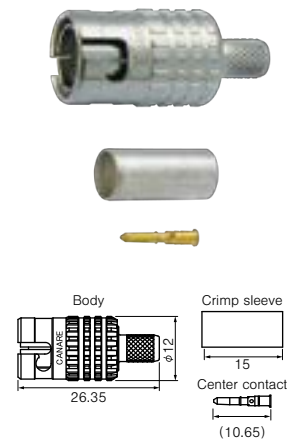Slim BNC Plug
Standard BNC Plug

MBCP-C3F

Technical Note

Voltage Standing - wave Ratio (VSWR) and Return Loss

Terminating the receiving end of a limited length coaxial cable using a resistance value not equal to its characteristic impedance creates a reflected wave that returns back down the cable to the sending end. The result is interference developing between the travelling wave and the return wave which results in a standing wave that causes voltage levels to fluctuate. The degree to which terminating resistance matches the characteristic impedance is indicated using the VSWR or voltage standing - wave ratio standard shown in Fig. 1. Going hand in hand with the VSWR ratio is the return loss factor which measures the size of the reflected wave current in relation to the travelling wave current. (See Fig. 2)




Fig. 1 Voltage Distribution Over Coaxial Cable

VSWR	Return Loss (dB)
2	9.54
1.5	13.98
1.2	20.83
1.1	26.44
1.05	32.26
1.02	40.09
1.01	46.06

Fig. 2 VSWR to Return Loss Conversion Table

Connectors

75Ω BNC Connectors

75Ω BNC Solder Plugs

■ BCP-H Series

Return Loss: 26.4 dB @ 1 GHz


Model	Suitable Cable	
	Canare	Others
BCP-H3B	L-3C2VS, L-3C2V, L-3CFB	—
BCP-H31F	L-3CFW	—
BCP-H45HW	L-4.5CHWS	1694F
BCP-H5B	L-5C2VS, L-5C2V, L-5CFB	—
BCP-H51F	L-5CFW, L-5CFB	—
BCP-H5/1	L-3C2VS, L-3C2V, L-3CFB L-5C2VS, L-5C2V, L-5CFB	—

• Standard package (20pcs)

- The tubular (ferrule) section is silver plated to make soldering easier.
- Cable stripper TS100E can be used. (Excluding BCP-H31F, BCP-H51F)



BCP-H3B



75Ω BNC Jack Plug

Model	Suitable Cable	Center Pin	Sleeve	Boot	Die Set
BCJ-C4	RG-59 B/U, LV-61S, Belden 8241, 8279, 88241	Solder	V75001	CB25	TCD-4CA TCD-451CA
BCJ-D25HD	L-2.5CHD	BN1204	BN7159	—	TCD-D253F
BCJ-D25HW	L-2.5CHWS	BN1204	BN7158	—	TCD-D253F
BCJ-D33UHD	L-3.3CUHD	BN1205	BN7003A	—	TCD-D253F

• Standard package (20pcs)

- Return loss for BCJ-C: 26.4 dB @ 1.5 GHz, 20.8 dB @ 2.4 GHz
- Return loss for BCJ-D: 20 dB @ 3 GHz, 15 dB @ 6 GHz, 10 dB @ 12 GHz

Be sure to use Canare Crimp Tool



BCJ-C4



BCJ-D25HW

12G-SDI



75Ω BNC Extension Adapter

Model	Description
BCJ-JK	Jack to Jack, for 12G-SDI


• Standard package (20pcs/100pcs)

- Return loss for BCJ-JK: 15 dB @ 12 GHz



BCJ-JK

12G-SDI



75Ω BNC Termination Plugs

Model	Description
BCP-TK	True 75Ω Termination, for 12G-SDI
BCP-TK-CH	BCP-TK with String


• Standard package (20pcs/100pcs)

- Includes 1/4 watt resistance.
- Return loss for BCP-TK: 26.4 dB @ 3 GHz, 15 dB @ 12 GHz



BCP-TK

12G-SDI



Connector Boots

■ CB0* Series


Our best selling connector boots for Canare BNC, TNC crimp plugs.

Model	Colors Available	BCP-**	BP-**	TNP-**
CB01	BLK BLU GRN RED YEL WHT	C1		
CB02		B25HD, B25HW, B26, B28, A25, A25F		
CB03	BLK BLU BRN GRN GRY	D33UHD, B3F, A3, A32, A3AHD, A3F, VA3	C3, C4	C3, C4
CB04	ORN PPL RED YEL WHT	B31F, B4F, A31, A4, A42, A4F, A55	C31	C31
CB05A		B53, B56, B5F, B51F, A5, A5F, A77, VA5, C5HD	C5, C5FA	C5
CB055W	BLK	D55UHW		


■ CB2* Series

Thinner type of CB0* series. Best fit for Canare Slim BNC, RCA, and F crimp plugs.


Model	Colors Available	Typical Connectors		
		MBCP-**	RCAP-**	FP-**
CB24		C3F	C3A, C3F	C3, C3F
CB25	BLK BLU GRN RED YEL WHT	C4, C4F	C3GS, C4A, C4F	C31, C4, C4F
CB26		C5F	C53, C5A, C5F	C5, C53A, C5F



CB01, CB02



CB03, CB04, CB05A



CB055W



CB24, CB25, CB26

75Ω BNC Receptacles

■ Jack to Jack **12G-SDI**

Return Loss: 15 dB @ 12 GHz

Model	Description	Flange
BCJ-JRK	Standoff	—
BCJ-JRUK	Flush-mount	ITT XLR-F77
BCJ-JRUDK		Neutrik D
BCJ-JRUDBK		Neutrik D (Black)

• Standard package (20 pcs)

• Redesigned for 12G-SDI to minimize return loss.

■ Jack to Solder

Return Loss: 26.4 dB @ 2 GHz

Model	Description	Flange
BCJ-R	Rear-mount	—
BCJ-R/1	Rear-mount, w/Ground Lug	—
BCJ-RU	Flush-mount	ITT XLR-F77
BCJ-RUD		Neutrik D
BCJ-RUDB		Neutrik D (Black)


• Standard package (20 pcs)

■ Panel Jack (Jack to Solder and Crimp) Return Loss: 26.4 dB @ 1 GHz

Model	Description	Flange	Suitable Cable	Die Set
BCJ-FC1	Front-mount, 1/2"	—	1.5C-2V	TCD-1DB
BCJ-FC1-7/16	Front-mount, 7/16"	—		
BCJ-RUC1	Flush-mount	ITT XLR-F77		

• Standard package (20 pcs)

- Panel Jack covers the rear wiring part with metal crimp sleeve.
- Flush-mount receptacle prevents damage on the jack.



■ Panel Hole Dimensions

BCJ-R	★BCJ-R/1 ★BCJ-JRK	BCJ-FC1	★BCJ-FC1-7/16	BCJ-RUC1 BCJ-RU BCJ-JRUK	BCJ-RUD BCJ-RUDB BCJ-JRUDK BCJ-JRUDBK

★ marked models accept insulation bushing IU-7/16, and the panel hole for IU-7/16 should be adopted in this case. (see below)

Insulation Bushing

Model	Description
IU-7/16	ABS plastic

• Standard package (20 pcs)

- Insulate a connector from a panel.
- 6 colors available (white, black, blue, green, red, or yellow)

Note: Please remove washers from a connector before using IU-7/16.


Panel Thickness:

1.2 to 1.5 mm: BCJ-DCJ, BCJ-FPLHA, BCJ-FPLV-12G, BCJ-FPLV-L, BCJ-FPLVA, BCJ-HBCJK, BCJ-R/1

1.2 to 3.0 mm: BCJ-FC1-7/16, BCJ-FPC, BCJ-FPC02, BCJ-FPLV01, BCJ-JRK, BCJ-JR, FJ-JR, FJ-FPC, NCJ-BCJR, RJ-JR



BCJ-JRK




BCJ-JRK



Website




BCJ-JRUK




BCJ-JRUK



BCJ-R/1




BCJ-R/1



BCJ-R




BCJ-RU



BCJ-RU




BCJ-RUD




BCJ-RUD



BCJ-FC1-7/16




BCJ-FC1-7/16



BCJ-FC1



BCJ-RUC1




BCJ-RUC1

ITT XLR-F77 Compatible	Neutrik D Compatible



Website

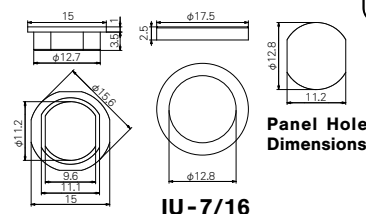

IU-7/16

Panel Hole Dimensions

75Ω BNC Connectors

■ Front Mount

Screws not included

Key Features and Benefits

- True 75Ω PC board mount receptacle.
- Gold plated beryllium copper center contact.
- Right Angle types can be fixed on PC board with M2.6 screw.
- Space-saving design
- Eliminates wiring material and cost.

Note : Any cleaning solvents cannot be used. This leads to insulation problems.
Insulation material: m-PPO (m-PPE)


< Return loss >

BCJ-BPLHK: 26 dB @ 1.5 GHz, 20 dB @ 3 GHz, 15 dB @ 6 GHz, 10 dB @ 12 GHz


BCJ-BPLHA: 26 dB @ 1.5 GHz, 20 dB @ 3 GHz

BCJ-BPCK: 26 dB @ 1.5 GHz, 20 dB @ 3 GHz, 15 dB @ 6 GHz, 10 dB @ 12 GHz


BCJ-BPC2P: 26 dB @ 1 GHz, 20 dB @ 2.5 GHz




BCJ-BPLHK




BCJ - BPLHK2P




BCJ-BPCK



BCJ-BPLHA



BCJ - BPLH2PA




BCJ - BPC2P




BCJ-BPLHK

12G-SDI




BCJ-BPLHA




BCJ - BPLHK2P


12G-SDI



BCJ - BPLH2PA




BCJ - BPLH3PA




BCJ-BPCK

12G-SDI



BCJ-BPC2P

35

75Ω BNC PCB Mount Receptacles (Hex Nut Type)

■ Front Mount

Model	Description	Stud Position	Panel Mount
BCJ - FPLV - 12G	Right Angle, for 12G-SDI	Vertical	Front: Hex nut and lock washer
BCJ - FPLVA	Right Angle		
BCJ - FPLV01	Right Angle, Low Cost		
BCJ - FPLV - L	Right Angle, Long Neck		
BCJ - FPLHA	Right Angle	Horizontal	
BCJ - FPC	Straight	—	
BCJ - FPC02	Straight, Low Cost		

• Standard package: 20pcs/100pcs, except for BCJ-FPLV-L (10pcs).

■ Rear Mount

Model	Description	Stud Position	Panel Mount
BCJ-RPC	Straight, Through Hole Mount	—	Rear: Hex nut and lock washer
BCJ-RPC/1	Straight, Surface Mount		

• Standard package: 20pcs/100pcs.

- BCJ-FPLV-12G is specially designed to minimize the return loss for 12G-SDI.
- Return loss: BCJ-FPLV-12G: 15 dB @ 6 GHz, 10 dB @ 12 GHz,
BCJ-FPLV-L: 26.4 dB @ 3 GHz, Others: 26.4 dB @ 1 GHz.

Note: Any cleaning solvents cannot be used. This leads to insulation problems.
Insulation material: m-PPO (m-PPE)



<Panel Hole Dimensions>

BCJ-FPLV-12G* BCJ-FPLVA* BCJ-FPLV01* BCJ-FPLV-L*	BCJ-FPLHA*	BCJ-FPC* BCJ-FPC02*	BCJ-RPC/1 BCJ-RPC

* BCP-FP series accept insulation bushing IU-7/16, and the panel hole for IU-7/16 should be adopted in this case. (see page 34)


<PC Board Hole Dimensions>

BCJ-FPLV-12G	BCJ-FPLVA BCJ-FPLV01 BCJ-FPLHA	BCJ-FPLV-L	BCJ-FPC BCJ-FPC02	BCJ-RPC




BCJ-FPLV-12G


12G-SDI




Return loss for BCJ-FPLV-12G




Return loss for BCJ-FPLV01




Return loss for BCJ-FPLV-L




Return loss for BCJ-FPC, BCJ-FPC02, BCJ-RPC




BCJ-FPLV-12G





BCJ-FPLVA




BCJ-FPLV01




BCJ-FPLV-L



BCJ-FPC



BCJ-FPC02



BCJ-RPC



Website

12G-SDI Active BNC

12G-SDI Active BNC integrating I/O interface device inside. It frees you from struggling with PCB design coping with return loss and board space.

BCAK 12G-SDI

*Card Edge Connector NOT included

Model	Form	Type	Built-in IC
BCAK-TL	Right Angle	TX	Cable Driver
BCAK-RL		RX	Cable Equalizer
BCAK-BL		BiDi	Cable Driver & Equalizer
BCAK-TS	Straight	TX	Cable Driver
BCAK-RS		RX	Cable Equalizer
BCAK-BS		BiDi	Cable Driver & Equalizer

Sales unit: 5 pcs

- Assembled on a PC board with SMT Card Edge Connector.
The pluggable 2-piece structure improves productivity and replaceability.
- *Card Edge Connector sold separately
- Supports 12G/6G/3G/HD/SD-SDI
- Reduce entire development cost as well as development period.
- 16 mm: Minimum pitch between adjacent connectors
- Straight models can be mounted on the same board at the same height as 3G-SDI Active BNC.
- PIN control: status monitoring and mode change
- Command control for optimization and characterization
- Cable driver and equalizer with reclocker
- TX/RX/BiDi identification by insulation color

SMT Card Edge Connectors 12G-SDI

Model	Form	Suit for
AKU-20LFYG	Right Angle	BCAK-TL/RL/BL
AKU-20SFYG	Straight	BCAK-TS/RS/BS

Sales unit: 5 pcs

- Card Edge Connector for BCAK.
- Same footprint for TX, RX and BiDi.
- Applicable for reflow soldering.


Specifications

Type	TX	RX	BiDi TX mode	BiDi RX mode
Supply Voltage	DC 2.5 V			
Current Consumption	195 mA	125 mA	128 mA	115 mA
Operating Temperature	-40 deg C to +85 deg C			
Output Amplitude	800 mV	N/A	800 mV	N/A
Equalization	N/A	12G-SDI 100m over L-5.5CUHD	N/A	12G-SDI 100m over L-5.5CUHD
Standards	SMPTE ST 2082-1, 2081-1, 424, 292, 259 BTA S-004C, EN 50083-9			
Weight	Right Angle: 9 g, Straight: 10 g			

	Right Angle	Straight
Panel Hole Dim.		
PCB Hole Dim.		

The dark shaded areas come into contact with the connector body.

Website

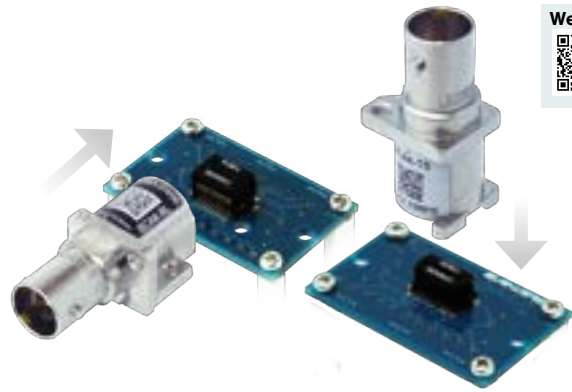

BCAK-TL



BCAK-TS



BCAK-RL




BCAK-RS




BCAK-BL



BCAK-BS



(Right Angle)



(Straight)



AKU-20LFYG



AKU-20SFYG

<Color Identifications>

Example) front view of Right Angle



TX
Insulation color
white



RX
Insulation color
black



BiDi
Insulation color
light gray

3G-SDI Active BNC

Small BNC connector incorporates either a cable equalizer or a cable driver. Active BNC makes innovation in your 3G-SDI PC board layout.

Website



IP Connectivity Products

Technical Trend

Fiber-Optic Systems

Connectors

Cables

Panels & Patchbays


Multichannel Systems

Cable Assemblies

Model	Form	Type	Built-in IC
BCA-TL	Right Angle	TX	Cable Driver
BCA-RL		RX	Cable Equalizer
BCA-TS	Straight	TX	Cable Driver
BCA-RS		RX	Cable Equalizer

Sales unit: 5 pcs


- BNC connector integrated with a cable equalizer or a cable driver, and yet keep the connector size to a minimum.
- Support 3G/HD/SD-SDI
- Offers an excellent return loss performance without designing 75Ω I/O Circuit
- Simplifies PCB design process dramatically and will reduce entire development cost
- PCB space saving and help to downsize devices
- TX/RX identification by insulation color

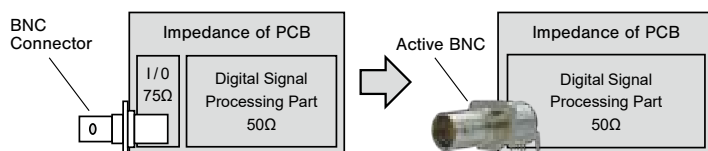


Simplify Your Circuit Design

<Color Identifications>

Example) front view of Right Angle



TX

Insulation color
white

RX


Insulation color
black

■ Specifications

Model	TX BCA-TL, BCA-TS	RX BCA-RL, BCA-RS
Supply Voltage	DC 3.3V	
Current Consumption	50 mA	70 mA
Operating Temperature	-25 deg C to +85 deg C	
Output Amplitude	800 mVpp	N/A
Equalization	N/A	3G-SDI 120m over L-5CFB
Standards	SMPTE ST 424, 292, 259, BTA S-004C, EN 50083-9	
Weight	9 g	




BCA-TL




(Right Angle)






BCA-RS



(Straight)

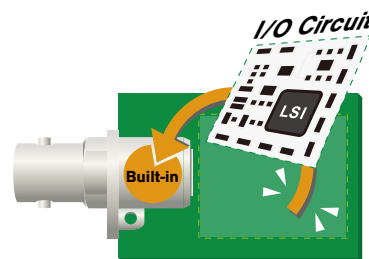

Space-saving

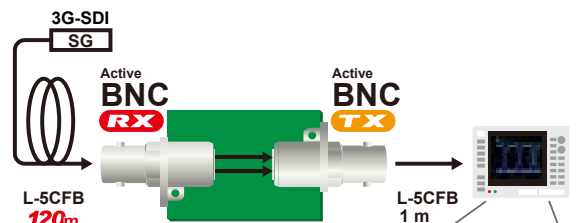

	BCA-TL	BCA-RL	BCA-TS	BCA-RS
Panel Hole Dim.	t1.6 Screw: M2.6		t1.6 Screw: M2.6	
PCB Hole Dim.	t2.0 (TOP VIEW)	t2.0 (TOP VIEW)	t2.0 (TOP VIEW)	t2.0 (TOP VIEW)

The dark shaded areas come into contact with the connector body.

Connectors

75Ω Micro BNC Connectors

75Ω Micro BNC Connectors

All Canare micro BNC connectors are designed for SMPTE ST 2082-1 spec.
Ideal for cabling 12G-SDI routers, switchers, and SFP modules.
PCB connectors will allow greater flexibilities of the number of video interface.

Website




■ Crimp Plugs **12G-SDI** Return loss : 26dB @ 3GHz, 20dB @ 6GHz, 15dB @ 12GHz

Model	Suitable Cable		Center Pin	Sleeve	Die Set
	Canare	Others			
New HBCP-D25HDA	L-2.5CHD, L-2.5CHLT	1855A	BN1214	BN7136	TCD-D253F
New HBCP-D25HWA	L-2.5CHWS, V4-2.5CHW	—	BN1214	BN7141	TCD-D253F
New HBCP-D33UHDA	L-3.3CUHD	—	BN1215	BN7003A	TCD-D253F


• Standard package (20 pcs)



HBCP-D25HDA



HBCP-D25HDA



HBCP-D25HWA

■ Crimp Plugs **12G-SDI** Return Loss : 20 dB @ 3 GHz, 8 dB @ 12 GHz


Model	Suitable Cable		Center Pin	Sleeve	Die Set
	Canare	Others			
HBCP-D53	L-4.5CHD	1694A	BN1200	BN7157	TCD-D534F

• Standard package (20 pcs)

Key Features and Benefits

- SMPTE ST 2082-1 compliant.
- Canare crimp design ensures quick and reliable installation.
- Gold plated "snap locks" center pin.
- Beryllium copper outer contact.
- Come with a position mark on the body for better visibility mating.

Be sure to use Canare Crimp Tool

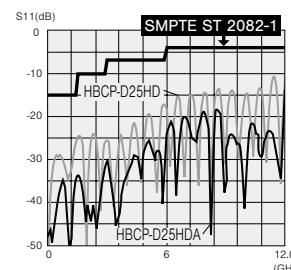

Return loss for
HBCP-D25HDA,
HBCP-D25HD



Standard BNC
(BCP series)



Micro BNC
(HBCPA series)



Micro BNC
(HBCP series)




DIN1.0/2.3
(DCP series)

Comparison of connector body diameter

* for reference only

What's A version?

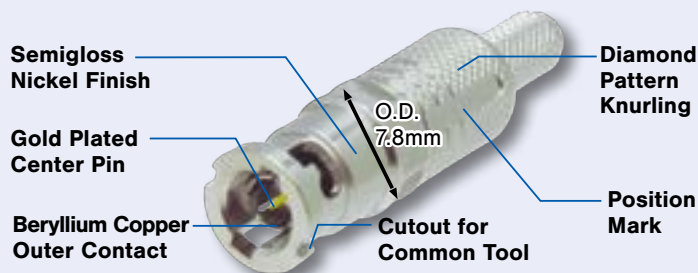

	HBCP-D**A	HBCP-D53
Model		
Return Loss	≥15dB@DC-12GHz	≥8dB@DC-12GHz
Narrow Pitch Ready	8mm with BET-HBNC	10mm
Extraction Tools	Canare BET-D/H Canare BET-HBNC Common HD-BNC Tool	Canare BET-D/H
Other Features	Wider position mark Better Finger Grip Semigloss Finish Removal Tool Friendly	Position Mark Proper Finger Grip Gloss Finish

Tools

Model	Description	Suitable Connector
BET-HBNC New	Extraction tool	HBCP-D*A
BET-D/H	Extraction tool	DCP-C, HBCP-D, HBCP-D*A

- Extraction tool BET-D/H is available for both Canare Micro BNC and DIN plugs.

HBCP-D25HDA with BET-HBNC



12G Router / Switcher



12G SFP Module



BET-HBNC




BET-D/H

PCB Mount Receptacles 12G-SDI


Return Loss: 20 dB @ 3 GHz, 10 dB @ 12 GHz

Model	Description	Nut Driver Bit
HBCJ-LRK	Right Angle	NDT-HBC
HBCJ-LRK/1	Right Angle, Long type	
HBCJ-FEMK	Edge Mount	

- Standard package (20 pcs)
 - SMPTE ST 2082-1 compliant
 - Combination of HBCJ-LRK/1 and HBCJ-FEMK offers efficient PCB mount Solution.
- Note:** Nut driver bit NDT-HBC is required.

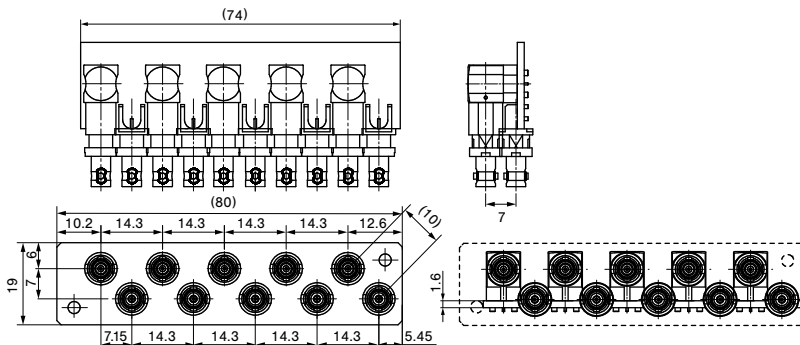


HBCJ-LRK



HBCJ-LRK




HBCJ-LRK/1



HBCJ-LRK/1



HBCJ-FEMK



HBCJ-FEMK

Adapters 12G-SDI

Return Loss: 20 dB @ 3 GHz, 10 dB @ 12 GHz

Model	Description	Nut Driver Bit
HBCJ-JRK	Jack to Jack	NDT-HBC (for panel mounting)
BCJ-HBCJK	BNC Jack to Micro BNC Jack	

- Standard package (20 pcs)
- SMPTE ST 2082-1 compliant
- Panel mountable

Tools

Model	Description	Suitable Connector
NDT-HBC	Nut driver bit, 6.35 mm (1/4") hex shank	HBCJ, BCJ-HBCJK



HBCJ-JRK



BCJ-HBCJK



NDT-HBC*

* Torque driver not included.

<Panel Hole Dim.>

HBCJ-LRK HBCJ-LRK/1 HBCJ-FEMK HBCJ-JRK	BCJ-HBCJK*

<PCB Hole Dim.>

HBCJ-LRK HBCJ-LRK/1	HBCJ-FEMK

* BCJ-HBCJK accept insulation bushing IU-7/16. See page 34 for the panel hole with IU-7/16.

Connectors

75Ω BNC, 75Ω N, Connectors

BNC Dust Caps

Model	Description
BCJ-DC	Polyethylene (Black)
BCJ-DC-CH	Polyethylene (Black) with string

• Standard package (20pcs/100pcs)

- Protects unused BNC receptacles from dirt and dust.



BCJ-DC

Website



BNC - RCA Adapter


Model	Description
BCP-RCAJ	RCA Jack (F) to BNC Plug (M)
BCJ-RCAP	BNC Jack (F) to RCA Plug (M)

• Standard package (1pc)

- Gold plated center contact
- Secure finger grip and reliable mating




BCP-RCAJ



Website



BCJ-RCAP



75Ω N Solder Plug

Return Loss: 26.4 dB @ 2 GHz

Model	Suitable Cable
NCP-H8HD	L-8CHD

• Standard package (1pc)


- Gold plating on the contact pin prevents deterioration, even after years of use.
- Return loss: 26.4 dB @ 2 GHz
- Solder type

Tools required: 17 mm and 21 mm wrenches


Caution: The connecting section of the N connector uses a shape that conforms to the IEC169-16's 75Ω impedance standard. Note that the 50Ω N and other connectors that do not conform to this specification cannot be connected.



NCP-H8HD



Website



Return loss for NCP-H8HD

75Ω N to BNC Adapter

Return Loss: 26.4 dB @ 2 GHz

Model	Description
NCJ-BCJR	N (F) - BNC (F)


• Standard package (1pc)

- Beryllium copper (gold plated) is used on the center contact for its superior spring characteristics.
- Return loss: 26.4 dB @ 2 GHz
- Panel mountable as well. For isolation from the panel, use Canare isolation bushing IU-7/16.(see page 34)




NCJ-BCJR

Website



Return loss for NCJ-BCJR

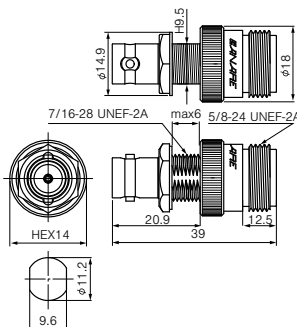

Panel Hole Dimensions

75Ω DIN 1.0/2.3 Connectors

Mini coax connectors IEC61169-29 and DIN 47 297 compatible.

■ Crimp Plugs

Return Loss: 20.8 dB @ 3 GHz

Model	Suitable Cable		Center Pin	Sleeve	Die Set
	Canare	Others			
DCP-C25HD	L-2.5CHD, L-2.5CHLT	1855A, VDM230	BN1148	BN7136	TCD-D253F
DCP-C25HW	L-2.5CHWS, V4-2.5CHW	—	BN1148	BN7141	TCD-D253F
DCP-C3F	L-3CFB	—	BN1148	BN7003A	TCD-D253F
DCP-C4F	L-4CHD, L-4CFB	1505A, VPM2000	BN1158	BN7015A	TCD-D534F
DCP-C53	L-4.5CHD	1694A, VSD2001	BN1157	BN7138	TCD-D534F

• Standard package (20pcs/100pcs)

- Our unique ball-locking mechanism offers smooth and reliable mating.
- Canare crimp design ensures quick and reliable installation.
- Elongated body design enables stable finger grip.
- Return loss: 20.8 dB or greater up to 3 GHz
- Extraction tool: BET-DIN or BET-D/H (see page 51)

US Patent No.: 8764473 B2

Be sure to use Canare Crimp Tool


■ PCB Mount Receptacles

Return Loss: 20.8 dB @ 3 GHz

Model	Description	Nut Driver Bit
DCJ-LR	Right Angle	NDT-DIN
DCJ-LR/1	Right Angle, Long type	
DCJ-FEM	Edge Mount	

• Standard package (20 pcs)

- Compact design ideal for high density mounting and downsizing devices.
- Combination of DCJ-LR/1 and DCJ-FEM is effective for staggered arrangement.
- Return loss: 20.8 dB or greater up to 3 GHz.

Note: Nut driver bit NDT-DIN is required.

■ Adapters

Return Loss: 26.4 dB @ 3 GHz

Model	Description	Panel Mount	Nut Driver Bit
DCJ-JR	Jack to Jack	Yes	NDT-DIN
BCJ-DCJ	BNC Jack to DIN1.0/2.3 Jack	Yes	N/A
BCP-DCJ	BNC Plug to DIN Jack	No	N/A

• Standard package (20 pcs)

- Return loss: 26.4 dB or greater up to 3 GHz.

Note: Nut driver bit NDT-DIN is required for DCJ-JR

<Panel Hole Dim.>

DCJ-LR DCJ-LR/1 DCJ-FEM DCJ-JR	BCJ-DCJ*

<PCB Hole Dim.>

DCJ-LR DCJ-LR/1	DCJ-FEM



*BCJ-DCJ accepts insulation bushing IU-7/16. See page 34 for the panel hole with IU-7/16.

■ Nut Driver Bit


Model	Description
NDT-DIN	6.35mm (1/4") hex shank




DCP-C25HD




DCJ-LR




DCJ-LR/1




DCJ-FEM



DCJ-JR



BCJ-DCJ



BCP-DCJ



NDT-DIN*

* Torque driver not included



Website

IP Connectivity Products

Technical Trend

Fiber-Optic Systems

Connectors

Cables

Panels & Patchbays

Multichannel Systems

Cable Assemblies

Connectors

75Ω Micro-miniature Coaxial Connectors

75Ω Micro-miniature Coaxial Connectors

Website



Canare's exclusive micro miniature connectors, KC series : specially designed for 4K/8K UHD equipment. Our PCB mount solutions provide flexible layout and reliable connectivity on 12G-SDI signal path. Products are 12GHz verified and guaranteed SMPTE ST2082-1.

■ PCB Mount Receptacles **12G-SDI**

Model	Description
KCM-PC	Straight
KCM-LR	Right Angle



• Standard package (20 pcs)




KCM-PC



KCM-LR



KCM-PC



KCM-LR

■ KC to BNC Conversion Adapter **12G-SDI**

Model	Description	Nut Driver Bit
BCJ-KCM	Rear Mount, Hex Nut	—
BCJ-FKCM	Front Mount, Grooved Nut	NDT-7/16

• Standard package (20 pcs)

Note: BCJ-FKCM requires the nut driver bit NDT-7/16 for installation and removal. Contact for the details.



BCJ-KCM



BCJ-FKCM

■ Cable Assemblies **12G-SDI**

Model	Description	
	Plug A	Plug B
KC1.2R-****-S	Straight	Straight
KC1.2R-****-L	Right Angle	Right Angle
KC1.2R-****-SL	Straight	Right Angle

Jacket: FEP (blue)

****: cable length (see below)



KC1.2R-****-S



KC1.2R-****-L


<Ordering Information>

KC1.2R - 0015 - S	
Length	Plug Type
0015 150 mm	S Straight
0020 200 mm	L Right Angle
0030 300 mm	SL Straight to Right Angle


Custom length available. Contact for the details.

Key Features and Benefits


- DC to 12 GHz; meets the SMPTE 2082-1 return loss requirements.
Return loss: 26 dB @ 1.5 GHz, 20 dB @ 3 GHz,
15 dB @ 6 GHz, 10 dB @ 12 GHz
- Snap-on engaging
- Durable design; beneficial for maintenance.
- Temperature range: -25 to 85 degree C
- The best flexibility on PCB design



Return Loss
Interface to Termination
(reference)



KC1.2R-***-SL

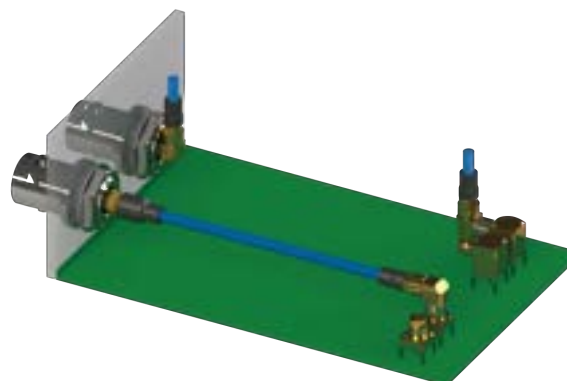

<Example of Use>

4K-DIN Coax Connectors

Canare unique “4K-DIN” allows you to connect or disconnect 4 of 3G-SDI signals in one easy step.

■ Crimp Plugs

Return Loss: 20 dB @ 3 GHz

Model	Suitable Cable	Die Set	Description
MDM-V4C25HW	V4-2.5CHW	TCD-D253F	Male
MDF-V4C25HW	V4-2.5CHW	TCD-D253F	Female

■ Flush-mount Receptacle


Return Loss: 20 dB @ 3 GHz

Model	Description
MDF-V4JRU	Jack to Jack

- 75Ω 4-channel coax connector with push-pull locking mechanism.
- Compact, solid, and lightweight nylon resin (PA 66) body
- Return loss: 20 dB @ 3 GHz
- MDF-V4JRU accepts MDM-V4C25HW and also DIN 1.0/2.3 plugs.

* Replacement crimp units also available:
DCP-C25HW-ML for MDM
DCJ-C25HW-ML for MDF

<Connection Example>

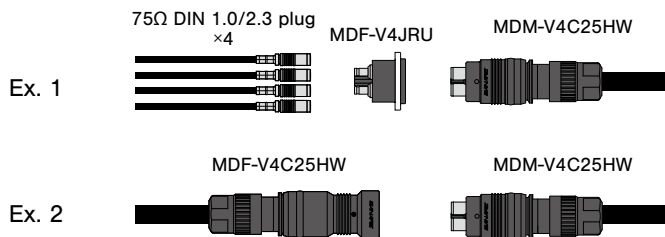

Be sure to use Canare Crimp Tool

75Ω Multi-pin Coax Connectors

Handles five 75Ω coaxial connections.

Model	Suitable Cable	Die Set	Description
MCM-V5C3	V5-3C	TCD-35CA	Plug
MCF-V5C3	V5-3C, L-3C2V, L-3C2VS	TCD-35CA	Receptacle

Model	Description
DCM01	Dust Cap for MCM-V5C3
DCF01	Dust Cap for MCF-V5C3

- 1.2 or less VSWR up to 1.5 GHz.
- Crimp system ensures quick and reliable installation.


* Replacement unit also available. MCM-V5C3: BN9078A MCF-V5C3: BN9079B

Be sure to use Canare Crimp Tool


Website




MDM-V4C25HW




MDF-V4C25HW



MDF-V4JRU



Hole Dimensions






Website




MCM-V5C3




MCF-V5C3



Panel Hole Dimensions
(Mounting screw M3 × 4 pcs)



Replacement Unit **BN9078A**



Replacement Unit **BN9079B**

Connectors

75Ω Triaxial Connectors

75Ω Triaxial Connectors

Website




Canare CC series cover global triaxial interconnection. CC-F series are ideal for interconnecting European triax system and CC-K series for American triax system.

Key Features and Benefits

- True 75Ω, DC 1.5 GHz; ≥20 dB return loss (≤1.2 VSWR)
- Push-lock mechanism
- Reliable crimp system
- Rugged and durable construction


■ CC-F Series : European preferred type

Model	Description	Suitable Cable		Boot/Cap	Center contact	Sleeve A	Sleeve B	Crimp Tool
		Canare	Others					
CCF5-JFC	Crimp type, Female cable mount	L-5CFTX	Belden : 7783A Klotz : TRIAX8 Fujikura : 4.8/1.0 EFTXF	CB31	BN9194	BN7120	BN7121	TC-1 + TCD-65C
CCM5-PFC	Crimp type, Male cable mount			CB32	BN1135			
CCF5-JFRC	Crimp type, Female panel mount			DCF02	BN9194			
CCM5-PFRC	Crimp type, Male panel mount			DCM02	BN1135			
CCF7-JFC	Crimp type, Female cable mount	L-7CFTX	Belden : 7784AS Klotz : TRIAX11 Fujikura : SUPERFLEX11	CB31	BN9182A	BN7113	BN7114	TC-2 + TCD-96C
CCM7-PFC	Crimp type, Male cable mount			CB32	BN1131			
CCF7-JFRC	Crimp type, Female panel mount			DCF02	BN9182A			
CCM7-PFRC	Crimp type, Male panel mount			DCM02	BN1131			

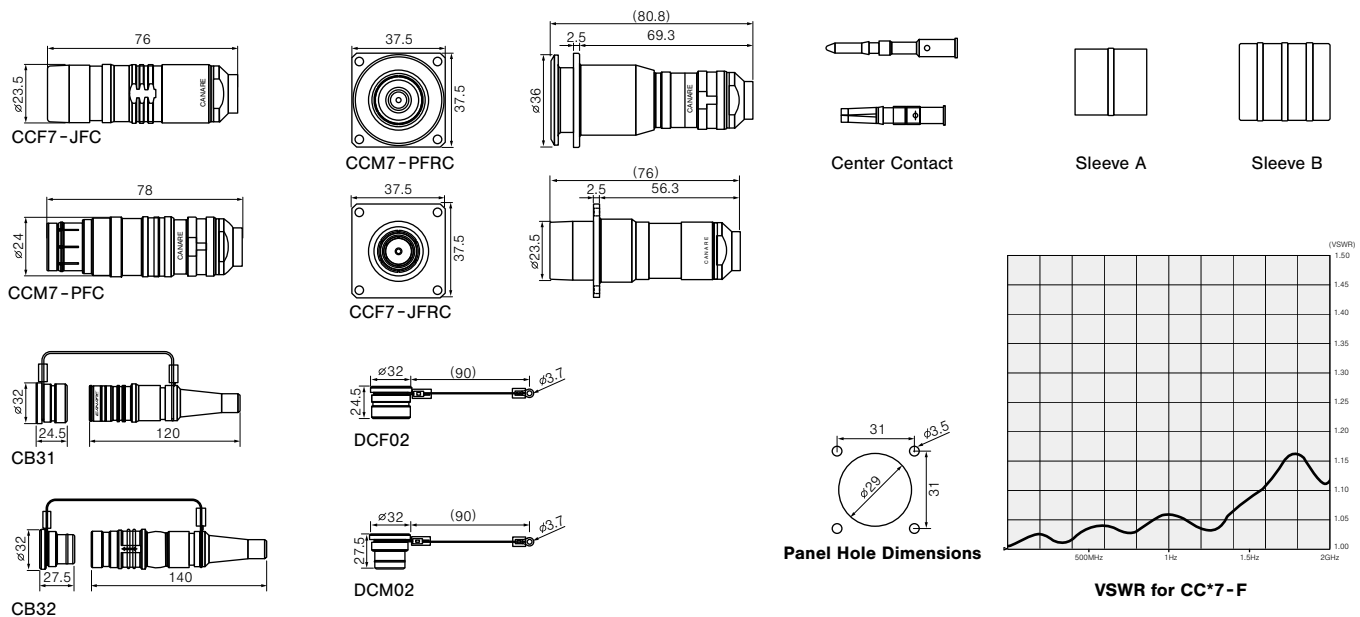

■ CC-K Series : U.S. preferred type

Model	Description	Suitable Cable		Retrofit Kit	Boot/Cap	Crimp Tool
		Canare	Others			
CCF4-JK	Crimp type, Female cable mount	L-4CFTX	Belden : 1856A, 1857A, 9267 Gepeco : LVT61859, VT61859	BN9127B	CB23	TC-1 + TCD-316C
CCM4-PK	Crimp type, Male cable mount			BN9128C	CB22	
CCF4-JKR	Crimp type, Female panel mount			BN9127B	DCM02	
CCM4-PKR	Crimp type, Male panel mount			BN9128C	DCM03	

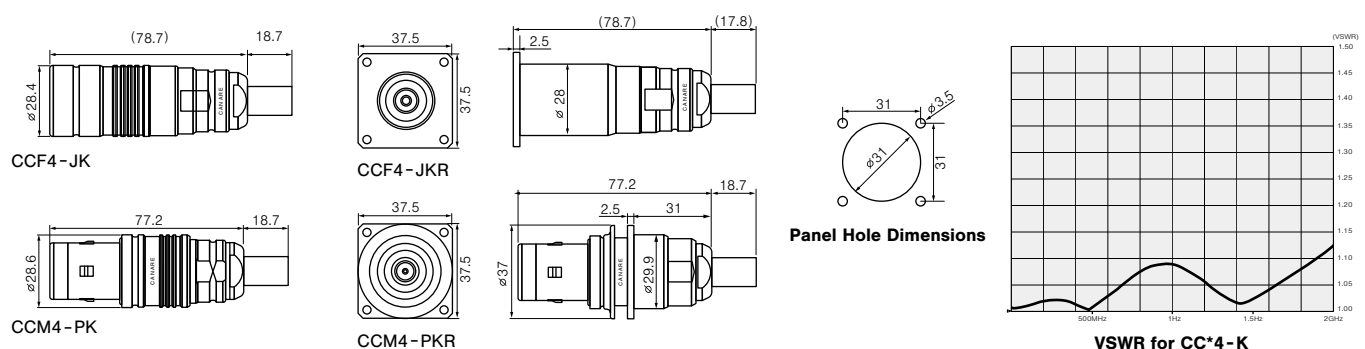

RCA Pin Connectors

■ Crimp Plugs

Model	Suitable Cable		Center Pin	Sleeve	Boot	Die Set
	Canare	Others				
RCAP - C25F	L-2.5CFB	1855A, 8218, 1417B, 1418B	B11014E	BN7029C	—	TCD-35CA
RCAP - C25HD	L-2.5CHD	—	B11015E	BN7129	—	TCD-35CA
RCAP - C3A	L-3C2VS, L-3C2V, V*-3C	—	B11014E	BN7003A	CB24	TCD-35CA
RCAP - C3GS	GS-6	—	BN1093	BN7079	CB25	TCD-35D
RCAP - C3F	L-3CFB, V*-3CFB	—	B11015E	BN7003A	CB24	TCD-35CA
RCAP - C42	—	1505F	B11016E	BN7011	—	TCD-31C
RCAP - C4A	LV-61S	8241, 8279, RG-59B/U	B11015E	BN7015A	CB25	TCD-4CA, TCD-451CA
RCAP - C4F	L-4CFB, V*-4CFB	1505A, 1505ANH, 8212, 8241F, 9167, 9259, 9659	B11016E	BN7015A	CB25	TCD-4CA, TCD-451CA
RCAP - C53	L-4.5CHD	1694A, 9066, 9116, 9118, 9248	B11020D	BN7016	CB26	TCD-35CA
RCAP - C5A	L-5C2VS, L-5C2V, V*-5C	—	B11016E	BN7016	CB26	TCD-35CA
RCAP - C5F	L-5CFB, V*-5CFB	—	B11020D	B75004A	CB26	TCD-5CF, TCD-55FA
RCAP - C77	LV-77S	8281F	B11016E	B75004A	CB26	TCD-5CF, TCD-55FA

• Standard package (20pcs/100pcs)

- Canare crimp design ensures quick and reliable installation.
- The crimp tool for the RCAP-C can be used for the Canare crimp BNC plugs as well, thus saving on extra equipment.

Be sure to use Canare Crimp Tool

■ Solder Plugs

Model	Description
F-09	Plug
F-10	Plug (long sleeve)

• Standard package (10 pcs)

- Robust metal shell
- Comfortable grip
- Cable O.D. up to 6.0 mm.

■ Standoff Receptacle

Model	Description
RJ-JR	Jack to Jack

• Standard package: 20 pcs by insulation color

- Insulation color is available in 5 colors (red, green, blue, yellow, white).
- VSWR 1.2 @ 100 MHz

■ Flush-mount Receptacles

Model	Description	Flange Type
RJ-RU	RCA - Solder	ITT XLR-F77
RJ-RUD		Neutrik D
RJ-RUDB		Neutrik D (Black)
RJ-JRU	RCA - RCA	ITT XLR-F77
RJ-JRUD		Neutrik D
RJ-JRUDB		Neutrik D (Black)
RJ-BCJRU	RCA - BNC	ITT XLR-F77
RJ-BCJRUD		Neutrik D
RJ-BCJRUDB		Neutrik D (Black)

• Standard package: 20 pcs by insulation color

- Three types of flanges are available.
- Insulation color is available in 5 colors (red, green, blue, yellow, white).
- VSWR 1.2 @ 100 MHz

<Panel Hole Dimensions>

RJ-JR (*)	ITT XLR-F77 Flange	Neutrik D Flange

(*) RJ-JR accepts insulation bushing IU-7/16; in this case, panel hole for IU-7/16 should be adopted (see page 34)



RCAP - C3A



F-09



F-10



RJ - JR




RJ - RU




RJ - JRUD




RJ - BCJRU




RJ - JR



RJ - RU



RJ - JRUD



RJ - BCJRU

Website



F Connectors

This type is used in such applications as home television receivers for cable television (CATV) systems.

Website



■ Crimp Plugs

Model	Suitable Cable		Center Pin	Sleeve	Boot	Die Set
	Canare	Others				
FP-C25HD	L-2.5CHD	—	BN1003B	BN7129	—	TCD-35CA
FP-C3	L-3C2VS, L-3C2V, V*-3C	—	BN1002B	BN7003A	CB24	TCD-35CA
FP-C31	L-3C2W	—	BN1002B	BN7011	CB25	TCD-31C
FP-C3F	L-3CFB, V*-3CFB	—	BN1003B	BN7003A	CB24	TCD-35CA
FP-C4	LV-61S	8241, 8279, RG-59B/U	BN1003B	BN7015A	CB25	TCD-4CA, TCD-451CA
FP-C4F	L-4CFB, V*-4CFB	1505A, 1505ANH, 8212, 8241F, 9167, 9259, 9659	BN1004B	BN7015A	CB25	TCD-4CA, TCD-451CA
FP-C5	L-5C2VS, L-5C2V, V*-5C	—	BN1004B	BN7016	CB26	TCD-35CA
FP-C52	L-5C2W	—	BN1004B	BN7014	—	TCD-451CA
FP-C53A	L-4.5CHD	1694A, 9066, 9116, 9118, 9248	BN1005B	BN7046	CB26	TCD-35CA
FP-C55A	—	1695A, 89120, 87120, 633948, 9116P	BN1005B	BN7045A	—	TCD-35CA
FP-C5F	L-5CFB, V*-5CFB	—	BN1005B	B75004A	CB26	TCD-5CF, TCD-55FA
FP-C71A	—	7731A, 9064, 9292, 1617A, 9011	BN1041A	BN7021A	—	TCD-7CA
FP-C7FA	L-7CFB	—	BN1030A	BN7021A	—	TCD-7CA

• Standard package (20pcs/100pcs)

- Lock mechanism improves reliability by preventing shifting or detaching of the center pin.
- The tools and cable stripper can be used for the Canare crimp BNC plugs as well, thus saving on extra equipment.
- VSWR of 1.1 or less up to 2 GHz.
- Designed for indoor use.

Be sure to use Canare Crimp Tool



FP-C4






Fig.1 Return loss for FJ-FPC and FJ-JR

■ Standoff Receptacle

Model	Description
FJ-JR	Jack to Jack
FJ-FPC	PC Board Straight Mount

• Standard package (20pcs/100pcs)

- VSWR of 1.1 or less up to 2 GHz. <Fig. 1>
- Accept insulation bushing IU-7/16. See page 34 for more information.




FJ-JR



FJ-FPC



FJ-JRU

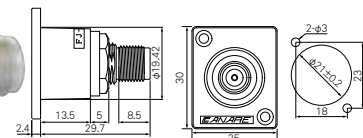

FJ-JRU

■ Flush-mount Receptacles


Model	Description	Flange Type
FJ-JRU	Jack to Jack	ITT XLR-F77
FJ-JRUD		Neutrik D
FJ-JRUDB		Neutrik D (Black)

• Standard package (20pcs)

- Three types of flanges are available.



FJ-JRUD

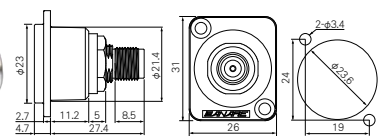

FJ-JRUD

Phone Plugs

Website



IP Connectivity Products

Technical Trend

Fiber-Optic Systems

Connectors

Cables

Panels & Patchbays

Multichannel Systems

Cable Assemblies

Featuring a properly cable clamp system ensures long life reliability.

■ 3.5mm Mini Phone Plug


F - 11	F - 12	F - 12S New
		
Description		
2 Conductor 3.5mm mini phone plug	3 Conductor 3.5mm mini phone plug	3 Conductor 3.5mm mini phone plug *Smaller shell version of F-12
Nickel contacts, Nickel shell ϕ 6.0 max (w/o spring : ϕ 7.5 max)	Nickel contacts, Nickel shell ϕ 6.0max (w/o spring : ϕ 7.5 max)	Nickel contacts, Nickel shell ϕ 5.0max (w/o spring : ϕ 6.7 max)

• Standard package (10pcs)


■ 1/4" Phone Plug

F - 15	F - 15L New	F - 16
		
Description		
2 Conductor 1/4" phone plug	2 Conductor 1/4" phone plug *Right-angle Type	3 Conductor 1/4" phone plug
Nickel contacts, Nickel shell ϕ 6.0max (w/o spring : ϕ 7.5 max)	Nickel contacts, Nickel shell ϕ 6.0max (w/o spring : ϕ 7.5 max)	Nickel contacts, Nickel shell ϕ 6.0max (w/o spring : ϕ 7.5 max)


• Standard package (10pcs)




F - 11




F - 12




F - 12S



F - 15




F - 16

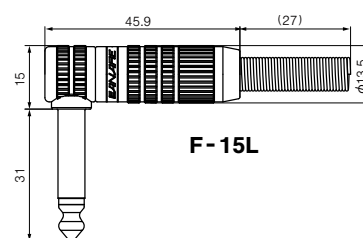

F - 15L

Canare's durable design



Connectors

50Ω BNC Connectors

50Ω BNC Crimp Plugs

VSWR of 1.1 or less up to 2 GHz, 1.2 or less up to 4 GHz.

■ Straight

Model	Suitable Cable	Center Pin	Sleeve	Boot	Die Set
BP-C3	L-3D2V, 3D-2V	BN1023A	BN7003A	CB03	TCD-35D
BP-C31	L-3D2W, 3D-2W	BN1023A	BN7011	CB04	TCD-3151D
BP-C4	RG-58C/U, RG-58A/U	BN1024A	BN7030A	CB03	TCD-35D
BP-C5	L-5D2V, 5D-2V	BN1025B	BN7016	CB05A	TCD-35D
BP-C51	L-5D2W, 5D-2W	BN1025B	BN7002	—	TCD-3151D
BP-C5FA	L-5DFB, 5D-FB	BN1016C	B75004A	CB05A	TCD-35DF TCD-55FA
BP-C51F	L-5DFBW-PE	BN1016C	BN7002	—	

• Standard package (20pcs)

■ Right Angle

Model	Suitable Cable	Center Pin	Sleeve	Die Set
BP-LC31	L-3D2W, 3D-2W	BN1023A	BN7011	TCD-3151D
BP-LC51	L-5D2W, 5D-2W	BN1025B	BN7002	

• Standard package (20pcs)

- Lock mechanism used on insulation improves reliability by preventing shifting or detaching of the contact pins.
- Elongated body design for straight type enables easy attachment and removal.
- Gold plating on the contact pin prevents deterioration, even after years of use.
- Use of crimping to attach the connectors ensures quick, reliable installation.

Be sure to use Canare Crimp Tool




BP-C5



BP-LC31



Website



Return loss for BP-C31

50Ω BNC Receptacles

■ Standoff

Model	Description
BJ-JR	Jack to Jack

• Standard package (20pcs)

- Mounting hole size is same as that for BCJ-R/1 connector.

■ Flush-mount Receptacles


Model	Description	Flange Type
BJ-JRU	Jack to Jack	ITT XLR-F77
BJ-JRUD		Neutrik D

• Standard package (20pcs)

- Two types of flanges are available.
- Flush-mount receptacle prevents damage on the jack.




BJ-JR



BJ-JR



BJ-JRU

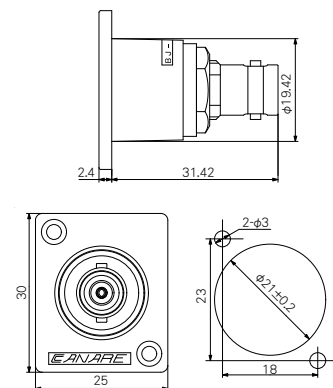

BJ-JRU



Website

50Ω BNC Extension Adapter


Model	Description
BJ-J	Jack to Jack

• Standard package (20pcs)

- VSWR of 1.1 or less up to 4 GHz.




BJ-J



BJ-J



Website



Return loss for BJ-J

50Ω TNC Crimp Plugs

■ Straight

Model	Suitable Cable	Boot	Die Set
TNP-C3	L-3D2V, 3D-2V	CB03	TCD-35D
TNP-C31	L-3D2W, 3D-2W	CB04	TCD-3151D
TNP-C4	RG-58C/U, RG-58A/U	CB03	TCD-35D
TNP-C5	L-5D2V, 5D-2V	CB05A	
TNP-C51	L-5D2W, 5D-2W	—	TCD-3151D
TNP-C5F	L-5DFB, 5D-FB	CB05A	TCD-35DF TCD-55FA

• Standard package (20pcs)


- VSWR of 1.1 or less up to 2 GHz, 1.2 or less up to 4 GHz.
- Canare crimp design ensures quick and reliable installation

Be sure to use Canare Crimp Tool

Website



TNP-C3

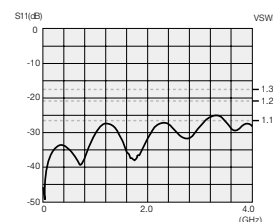

Return loss for TNP-C3

IP Connectivity Products

Technical Trend

Fiber-Optic Systems

Connectors

Cables

Panels & Patchbays

Multichannel Systems

Cable Assemblies

50Ω N Crimp Plugs

■ Straight

Model	Suitable Cable	Boot	Die Set
NP-C31	L-3D2W, 3D-2W	CB04	TCD-3151D
NP-C51	L-5D2W, 5D-2W	—	
NP-C5F	L-5DFB, 5D-FB	CB05A	TCD-35DF TCD-55FA
NP-C51F	L-5DFBW-PE	—	

• Standard package (20pcs)

■ Straight Jack

Model	Suitable Cable	Boot	Die Set
NJ-C5F	L-5DFB, 5D-FB	CB05A	TCD-35DF TCD-55FA

• Standard package (20pcs)

- VSWR of 1.1 or less up to 2 GHz, 1.2 or less up to 4 GHz.
- Canare crimp design ensures quick and reliable installation

Be sure to use Canare Crimp Tool

Website



NP-C51

50Ω SMA Crimp Plugs

■ Straight

Model	Suitable Cable	Die Set
SMAP-C1	1.5D-QEW	TCD-1DB
SMAP-C31A	L-3D2W, 3D-2W	TCD-3151D
SMAP-C3F	L-3DFB	TCD-35DF
SMAP-C51	L-5D2W, 5D-2W	TCD-3151D
SMAP-C5F	L-5DFB, 5D-FB	TCD-35DF, TCD-55FA

• Standard package (20pcs)

■ Straight Jack

Model	Suitable Cable	Die Set
SMAJ-C3F	L-3DFB	TCD-35DF
SMAJ-C51	L-5D2W, 5D-2W	TCD-3151D
SMAJ-C5F	L-5DFB, 5D-FB	TCD-35DF, TCD-55FA

• Standard package (20pcs)


- VSWR of 1.1 or less up to 2 GHz, 1.2 or less up to 4 GHz.
(SMAP-C1: VSWR of 1.2 or less up to 2 GHz)
- Canare crimp design ensures quick and reliable installation
(SMAP-C1 has solder center contact)

Be sure to use Canare Crimp Tool

Website



SMAP-C1




SMAP-C1



SMAP-C31A



SMAJ-C3F



SMAJ-C3F

Connectors

Cable Stripper, Crimp Tools

Coaxial Cable Stripper

Three internal circular steel blades perform precise, extremely clean and easy stripping.

Model	Preset to
TS100E	LV-77S-L-5CFB, V*-5CFB, V*-5C, LV-61S-L-4CFB, V*-3C
TS100U	L-2.5CHD, 1855A, 1505A, 1694A

- For most Canare BNC, DIN, RCA and F crimp plugs.
 - Rotary knob to select 5 different cable setups.
 - Make your own cable setting within cable O.D. 4mm~11mm
 - Hex wrench is attached on the lid top for quick adjustment.
 - One replacement blade included, and also sold separately.
- Replacement blade: TSC (1pc)



Note:

The following types of cables may not be accurately processed by Canare's TS100 Cable Stripper, owing to their construction.

1. Cables employing such hard jacket material as polyethylene.
2. Cables employing such particularly soft insulator material as high foam polyethylene.
3. Cables employing steel wire and semirigid pipe for outer conductor.



TS100E

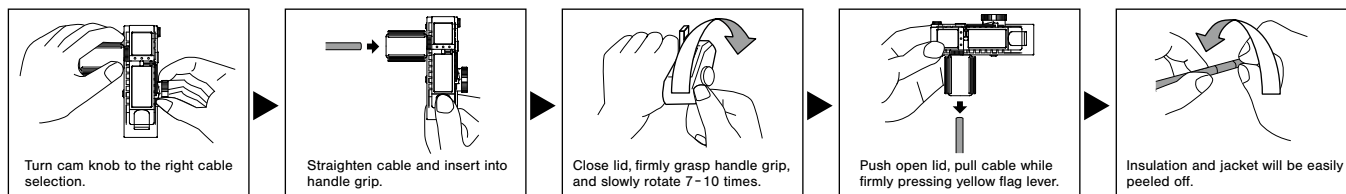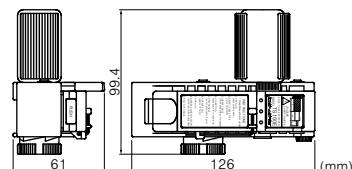

Crimp Tools

Canare crimp tool offers reliable high-quality crimping performance in an easy-to-use design.


Die Sets

Model	Pin Crimp		Sleeve Crimp		Model
Die Sets	#1 (mm)	#2 (mm)	#3 (mm)	#4 (mm)	Hand Crimp Tools
TCD-1DB	—	—	3.94	—	TC-1
TCD-31C	1.37	—	6.75	—	TC-1
TCD-3151D	1.92	—	8.36	6.75	TC-1
TCD-316C	1.35	—	9.4	6.75	TC-1
TCD-35CA	1.35	—	7.6	5.85	TC-1
TCD-35D	1.92	—	7.6	5.85	TC-1
TCD-35DF	1.92	2.1	8.05	5.82	TC-1
TCD-4CA	1.35	—	6.48	—	TC-1
TCD-451CA	1.35	—	8.36	6.4	TC-1
TCD-5CF	1.31	—	8.05	—	TC-1
TCD-5HD	1.87	—	8.05	—	TC-1
TCD-55FA	1.35	2.1	8.05	—	TC-1
TCD-55UHD	1.62	—	8.05	—	TC-1
TCD-57C	1.62	—	8.5	—	TC-1

Hand Crimp Tools

Die Sets

Model	Pin Crimp		Sleeve Crimp		Model
Die Sets	#1 (mm)	#2 (mm)	#3 (mm)	#4 (mm)	Hand Crimp Tools
TCD-65C	1.92	—	9.4	7.6	TC-1
TCD-67HD	2.1	—	10.2	—	TC-1
TCD-7CA	1.87	—	10.2	—	TC-1
TCD-8HD	2.4	—	11.26	—	TC-2
TCD-96C	1.92	—	11.26	9.4	TC-2
TCD-D253F	1.1	—	5.1	5.85	TC-1
TCD-D534F	1.27	—	7.55	6.4	TC-1

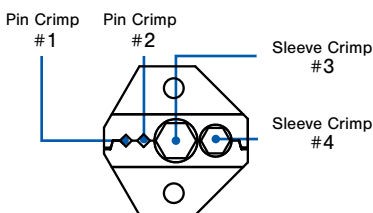


Accessories

Model	Description	Length
TB-2A	Tool case	—
BET-BNC New	Extraction tool for BNC straight plug	300 mm
BET-MBNC	Extraction tool for MBNC-C series	300 mm
BET-HBNC New	Extraction tool for HBNC-D*A series (Narrow Pitch Ready: 8mm)	300 mm
BET-DIN	Extraction tool for DCP-C series	300 mm
BET-D/H	Extraction tool for DCP-C & HBNC series (Narrow Pitch Ready: 11mm or 10mm)	300 mm

- Select the appropriate die set to suit the individual connector
- Hand crimp tool is required for die set, and sold separately
- Die set are interchangeable



TC-1

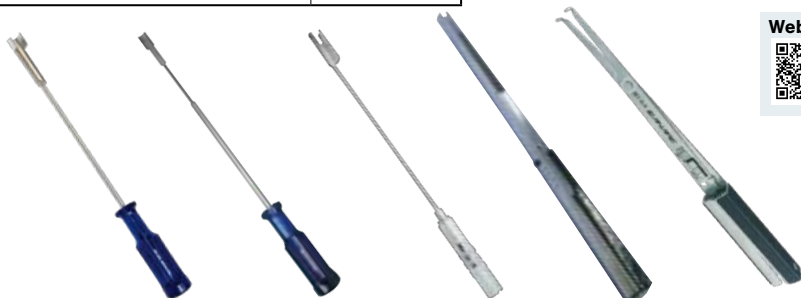

BET-BNC

BET-HBNC

BET-MBNC

BET-DIN

BET-D/H




TB-2A
(tools and connectors not included)



Website


Crimp Connector Assembly Instructions



Confirm compatibility of the connector and cable prior to assembly.


- Slide the crimp sleeve over the cable and strip the jacket, braided shield, and insulation of the coaxial cable as shown at left.

- For cables with stranded inner conductor, twist the strands in the same direction as plied after removing the insulation.
- For a crimp sleeve with steps, slip it over the cable from the stepped end, as in the diagram.
- If any metal foil shield is left on the cable, it may get stuck in the mouth of connector, making insertion impossible.
- Remove all stray strands and offcuts of the metal foil shield to avoid possible short circuiting.
- Make sure the inner conductor is free of all insulation debris and offcuts to ensure complete crimping.




- Place the center contact pin of the connector on the inner conductor of the cable and crimp the center contact pin at the correct position (without remaining a gap) as shown at left, using the specified crimp tool and die set.

- To confirm the crimping properly, measure the crimp height after removing burrs with a knife. If it is not within the ideal value range, adjust the crimp tool.
- Do not crimp the center contact pin at the stepped root end.
- Confirm the center contact pin is crimped straight to the inner conductor. If the center contact pin is slanted, align it gently.



- Hold the cable and push it into the connector body until the center contact is locked in place. You may feel a click sound when the center contact is locked.

- Pull the cable gently (less than 4.5 lbs or 19.6 N) to confirm that is locked.



- Slide crimp sleeve up against connector body over the braided shield until it butts against the connector body. Center the die over the crimp sleeve and crimp in place, using the specified crimp tool and die set.

- Do not pull the cable while crimping is executed.


Adjusting Crimp Tool

1. Measuring Crimping height

Crimp height is measured after the crimp is made. As shown in the figure, the sum of the measured values for both directions is divided by two to arrive at the crimp height. The ideal value range for the BCP-A3 connector, for example, is 1.4 mm to 1.5 mm. When this value is lower (overcrimping occurs) than the recommended crimp height, the crimp becomes very hard. A value higher (undercrimping occurs) than the recommended value can result in increased electrical resistance and a physically weaker crimp. Either digital calipers or a micrometer should be used for measuring crimp height.

2. Measuring Frequency

Crimp height is measured prior to commencing use of the crimp tool and always when changing the crimping die. After this, the crimp height is regularly measured after about each 1,000 crimps.



$$\text{Crimp height value} = (A+B) / 2$$

Refer to the separately included manual for the appropriate crimp height values for individual connectors.

3. Tool Measuring Procedures


Crimp force increases and crimp height decreases when the tool's adjuster dial is turned in the direction of the 9. The dial is adjusted by first releasing it using a screw driver.



FAQ

Q Does it matter in which direction crimp sleeves are attached?

A For BCP-A3-use and other non-stepped (straight type) crimp sleeves, it does not matter in which direction the crimp sleeve is attached. The attachment direction also does not matter for BCP-A5F-use and other specific-use types that have a chamfer (groove) at one end of the crimp sleeve. However, stepped crimp sleeves such as those for BCP-C1, etc. are directional and must be attached in the direction shown in the diagram below, with the cable threaded through the sleeve starting from the end with the step (that is, the end with smaller-diameter hole).




Q What should be done with a metal foil shield?

A Strip the metal foil shield to the root of the braided shield (to the edge of the jacket). If any metal foil shield is left on the cable, it may get stuck in the mouth of connector, making insertion impossible.

Q Why do some BNC plugs made by other companies have a sharp point at the tip of the central contact? Are these compatible with Canare's BNC receptacles?

A The central contact is pointed in conformance with the JIS standard for 50Ω BNC connectors. The central contacts on Canare's connectors conform to the MIL standard, and therefore are not pointed. These two different shapes simply offer different ways to guide the plug into the female receptacle and have no direct effect on contact quality.

The actual contact surfaces on Canare's BNC connectors are designed in conformance with JIS standards and therefore pose no compatibility problems.



Q Is it possible to use cables not listed in the connector compatibility table as long as they are close to the dimensions of those listed?

A No. While connection may be possible, performance may be adversely affected. Even if the connection appears to work, factors such as electrical instability, weak cable contact strength and others may cause problems during actual use. Therefore, it is necessary to test and evaluate whether it is actually possible to use the configuration in question. Particular caution should be used when crimping is involved.

Q What is meant by "cable contact strength"?

A Cable contact strength refers to the maximum load borne by the cable when exerting tensile force to remove it from the connector. For Canare products, "cable contact strength" refers to the contact strength of a cable's outer conductor, not including the pull-out strength of the central contact or the contact strength of the inner conductor.

Q What is the approximate insertion loss associated with connectors?

A The value varies depending on the connector, but for BNC plugs, the value is approximately 0.1 dB per plug (DC-2 GHz).

Connectors

Crimp Tools

Cables to Connector Cross-Reference

■ BNC, Slim BNC, F, RCA

See page 49 - 50, for 50Ω cables and connectors.
See page 52, for more information about the crimp height.
These tables include cables of other brands such as Belden, Draka, and Gepco.

Cable	BNC			Slim BNC	F	RCA	Multi-pin	Suitable Die Set	Crimp Height
	BCP-D/B	BCP-A/C	BCP-LC	MBCP-C	FP-C	RCAP-C	MCM/MCF		
L-1.5C2VS/V*-1.5C		BCP-C1						TCD-1DB	N/A (solder pin)
1.5C-2V		BCP-A25							1.40 - 1.47
L-2.5CFB		BCP-A25F		MBCP-C25F		RCAP-C25F			
1855A	BCP-B26								
1855P									
L-2.5CHD/L-2.5CHLT	BCP-B25HD				FP-C25HD	RCAP-C25HD		TCD-35CA	1.40 - 1.50
VDM230									
1855ENH	BCP-B28								
HD PRO 0.6/2.8 AF									
1506A		BCP-A32							
L-2.5CHWS	BCP-B25HW								
V4-2.5CHW									
L-3C2V/L-3C2VS		BCP-A3					MC*-V5C3		
V3-3C/V4-3C		BCP-A3	BCP-LC3		FP-C3	RCAP-C3A			
V5-3C		BCP-VA3					MC*-V5C3		
L-3CFB	BCP-B3F	BCP-A3F	BCP-LC3F	MBCP-C3F	FP-C3F	RCAP-C3F		TCD-35CA	
V*-3CFB									
L-3C-AHD		BCP-A3AHD							
L-3.3CUHD	BCP-D33UHD								
1695A									
VSD2001TS		BCP-A55			FP-C55A				
L-3C2W		BCP-A31			FP-C31			TCD-31C	
L-3CFW	BCP-B31F								
V*-3CFW									
LV-61S		BCP-A4		MBCP-C4	FP-C4	RCAP-C4A			
RG-59B/U									
L-4CFB/V*-4CFB				MBCP-C4F	FP-C4F	RCAP-C4F		TCD-4CA or TCD-451CA	1.40 - 1.50
1505A, 1505ANH	BCP-B4F	BCP-A4F							
HD PRO 0.8/3.7 AF									
VPM2000									
L-4CHD									
1505F		BCP-A42				RCAP-C42		TCD-31C	
L-4.5CHD	BCP-B53			MBCP-C53	FP-C53A	RCAP-C53			
1694A									
HD PRO 1.0/4.8 AF	BCP-B56								
L-4.5CHWS	BCP-B45HW							TCD-35CA	
L-5C2V/L-5C2VS		BCP-A5							
V*-5C		BCP-A5	BCP-LC5		FP-C5	RCAP-C5A			
LV-77S		BCP-VA5							
L-5CFB	BCP-B5F	BCP-A5F							
V*-5CFB		(*)							
L-5CFW	BCP-B51F								
V*-5CFW									
8281F		BCP-A77				RCAP-C77			
L-5C2W		BCP-A52			FP-C52			TCD-451CA	
L-5CHD		BCP-C5HD						TCD-5HD	1.90 - 2.00
L-5.5CUHD	BCP-D55UHD							TCD-55UHD	
L-5.5CUHWS	BCP-D55UHW							TCD-57C	1.62 - 1.72
4794R	BCP-D57								
L-6CHD		BCP-C6HD							
L-7CHD		BCP-C7HD						TCD-67HD	2.15 - 2.25
L-7CFB		BCP-C7FA			FP-C7FA				
7731A									
9292		BCP-C71A			FP-C71A			TCD-7CA	1.90 - 2.00
L-8CHD/L-8CUHD	BCP-D8UHD							TCD-8HD	2.44 - 2.54
GS-6						RCAP-C3GS		TCD-35D	2.01 - 2.20

*1: Suitable die set for BCP-A5F is TCD-35CA

■ Micro BNC, DIN1.0/2.3, 4K-DIN

Cable	Micro BNC	DIN	4K-DIN	Suitable Die Set	Crimp Height
	HBCP-D	DCP-C	MDM/MDF		
L-2.5CHD/L-2.5CHLT	HBCP-D25HDA				
1855A		DCP-C25HD			
VDM230					
L-2.5CHWS	HBCP-D25HWA	DCP-C25HW		TCD-D253F	1.08 - 1.16
V4-2.5CHW			MD*-V4C25HW		
L-3CFB		DCP-C3F			
L-3.3CUHD	HBCP-D33UHDA				
L-4CFB					
1505A		DCP-C4F			
VPM2000					
L-4CHD					
L-4.5CHD	HBCP-D53			TCD-D534F	1.25 - 1.33
1694A		DCP-C53			
VSD2001					

■ Video Patch Plugs

Cable	Video Plug	Suitable Die Set	Crimp Height
L-2.5CHWS	VWP-C25HW	TCD-D253F	N/A (solder pin)
	MVP-C25HW		
	MCVP-C25HW	TCD-D253F	1.08 - 1.16
	SVP-C25HW		
LV-61S	VWP-C4A	TCD-4CA or TCD-451CA	N/A (solder pin)
RG-59B/U	MVP-C4		

Be sure to use in the suitable combination of cable, connector, and die set

110Ω-75Ω Impedance Transformers

Passively convert AES/EBU digital audio signals from 110Ω/XLR3 output to a 75Ω BNC coaxial cable and then back again to a 110Ω/XLR3 input.

Adapter Type


Model	Description
BCJ-XJ-TRC	XLR3 (F) - BNC Jack
BCJ-XP-TRC	XLR3 (M) - BNC Jack
BCJ-XJ-A10TRC	XLR3 (F) - BNC Jack, 10dB Attenuation Pad

Panel Mount Type


Model	Description (Front - Back)	Flange Type
XJ3F-TRC-BCJ	XLR3 (F) - BNC Jack	ITT XLR-F77
XJ3M-TRC-BCJ	XLR3 (M) - BNC Jack	
BCJ-TRC-XP3F	BNC Jack - XLR (F)	
BCJ-TRC-XP3M	BNC Jack - XLR (M)	
XJ3F-A10TRC-BCJ	XLR3 (F) - BNC Jack, 10dB Attenuation Pad	
BCJ-A10TRC-XP3F	BNC Jack - XLR3 (F), 10dB Attenuation Pad	

- SMPTE 276M and AES3 transmission standards
- Coaxial transmission of 2 channel digital audio
- Allows longer cable runs than 110Ω twisted pair
- AES/EBU signal distribution using Canare 75Ω video patchbays

BCJ-XJ-TRC / BCJ-XP-TRC

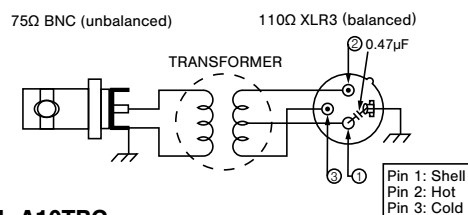

BCJ-XJ-A10TRC

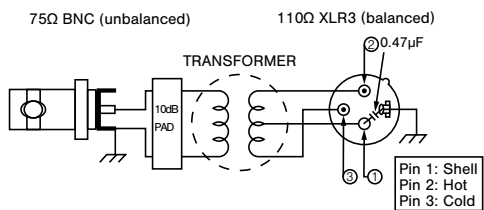

110Ω-75Ω Impedance Transformer: Input/Output Level Performance

AES/EBU Transmitter (V)	Transformer Out (V)	AES/EBU Transmitter (V)	Transformer Out - 10dB Pad (V)
2.0	1.60	2.0	0.50
3.0	2.39	3.0	0.75
4.0	3.18	4.0	1.01
4.5	3.60	4.5	1.13
5.0	3.98	5.0	1.26
6.0	4.78	6.0	1.51
7.0	5.58	7.0	1.76
8.0	6.38	8.0	2.02
9.0	7.18	9.0	2.27
10.0	7.98	10.0	2.52

BCJ-XJ-TRC/BCJ-XP-TRC

BCJ-XJ-A10TRC



BCJ-XJ-TRC



BCJ-XP-TRC




BCJ-XJ-A10TRC




XJ3F-TRC-BCJ




BCJ-TRC-XP3M




BCJ-XJ-TRC



BCJ-XP-TRC

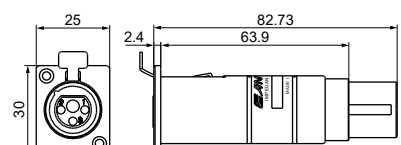


XJ3F-TRC-BCJ

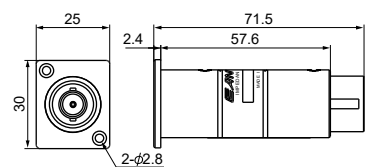

BCJ-TRC-XP3M

Panel Hole Dimensions



Considerations When Configuring and Selecting Cables for Microphone Systems

With the growing demand of recent years for both greater physical comfort and savings in energy consumption, systems incorporating digital control based on the latest advances in electronics are coming into wider use for air conditioning and lighting systems. As all these systems come on line, we cannot help but be reminded of the fact that the wiring used for these digital control systems generates pulse-based electromagnetic noise of the kind that affects the very delicate signals used in microphone lines.

Microphone cables are designed to carry a range of signals that span the spectrum from 1/100 of a volt (10 mV) to 1/1,000,000 (1 μ V). One small error in wiring procedure or cable selection and the entire microphone system turns into an antenna collecting the surrounding noise.

The following section uses a question and answer format to cover a list of the essential points for configuring microphone systems.



Q1 Under what sort of conditions should a two-conductor microphone cable be used?

The two-conductor microphone cable is suited to environments where noise is not such a great factor and the audio signals are in the comparatively high -20 dB to 0 dB level range. In such cases, the two-conductor cable offers the advantages of smaller diameter and lower cost. Of course if microphone level, rather than line level, is the criterion being used, star quad cable should be used instead.

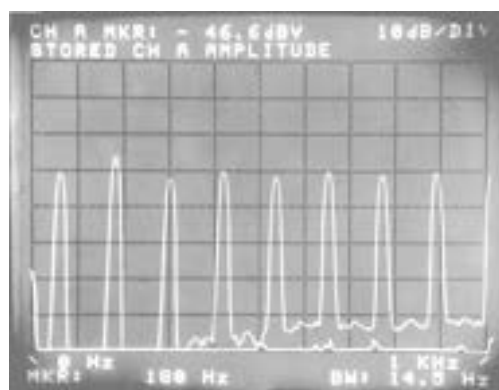


Fig. 1 Noise induced in two-conductor shielded cable (MVVS)

Q2 Under what conditions should star quad microphone cable be used?

This type is used for environments with a higher noise factor and where audio signals are in the low -50 dB or less range. This type of cable performs well under noise conditions that exceed the capacity of the two-conductor shielded cable, effectively shielding out over ninety percent more noise. (See Figs. 1, 2)

However, should this type be routed alongside a power cable of any significant capacity it should probably be encased in metal conduit just to be safe.

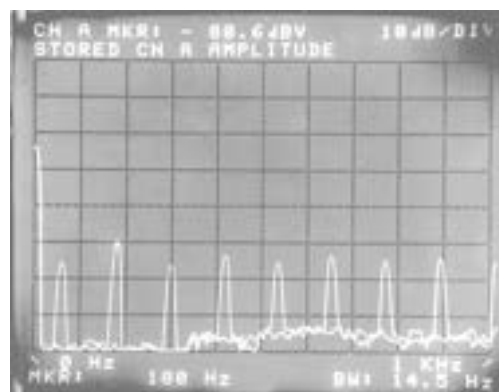



Fig. 2 Noise induced in star quad cable (Canare L-4E5AT)

Q3 Isn't star quad cable expensive?

The cost for this type of cable has fallen significantly in recent years. Several decades ago, cost was so prohibitive a factor that only large musical auditoriums and broadcasting facilities could afford them. Canare succeeded in developing a low-cost star quad cable using aluminum foil in 1981. In addition to traditional professional facilities, this type gained wide use in such non-traditional areas as wedding halls and school lecture rooms.

<Test conditions>

1. Flush along power cables for 20 m distance
2. Power cable connected to lighting fixture dimmed to 50% capacity with load of 1 kW.
3. The noise induced in the audio cable was boosted by 50 dB in the head amplifier and viewed on a spectrum analyzer.



Star quad cable with aluminum foil shield

Q4 When avoiding use of metal conduit, how far away should microphone cable be from power cables?

When foregoing the use of protective metal conduit, use the graph shown in Fig. 3 as a general guide for distancing cables. Note that ignoring basic guidelines for positioning cables can easily result in noise induction problems which are very difficult to deal with later. Encasing microphone cables in metal conduits is highly recommended for applications that utilize the delicate signal range.

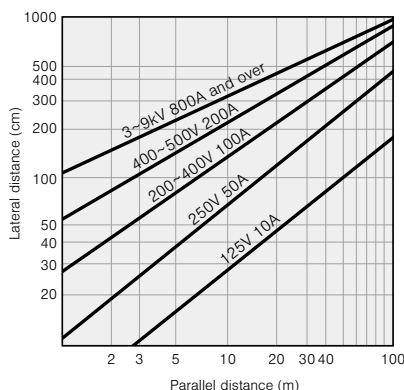


Fig. 3 Distances for positioning microphone and power cables

<Requisite conditions>
1. Cables are the star quad type.
2. Power cables are in the circular cab tire configuration.

Q5 What considerations are required when using a rack for strong electric current?

The same as for the preceding question when metal conduit is not used.

Q6 Would there be any problem with routing the cables through a flexible metal conduit?

The flexible conduit would certainly help to reduce noise but would not be as effective as a rigid metal conduit. Use the graph in Fig. 4 as a guide for distancing cables.

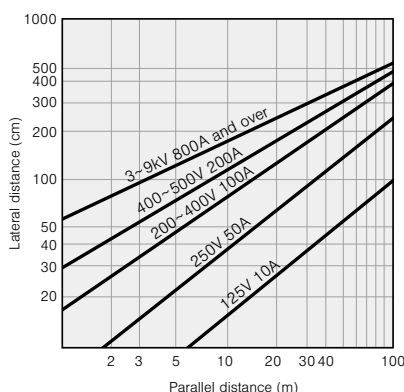


Fig. 4 Distances for positioning microphone and power cables when routing microphone cables via flexible metal conduit

<Requisite conditions>
1. Cables are the star quad type routed through flexible metal conduit.
2. Metal conduit is grounded using appropriate level of resistance.
3. Power cables are in the circular cab tire configuration.

Q7 What are the criteria for choosing between the many different types of microphone cables?

As all are designed to provide electromagnetic shielding there is not that much basic difference in shielding performance. However, they do differ in various specific characteristics. Cable type should be selected according to specific requirements. (See Fig. 5)

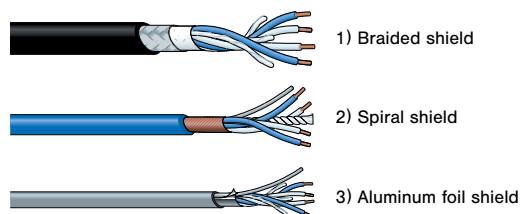


Fig. 5 Types of star quad microphone cables

• Braided Shield

The braided copper shield is designed to maintain effective shielding performance, regardless of how many times the cable is unwound, bent, twisted or rewound. It is ideal for use as handheld microphone cables or extension cables. This type is more expensive than other types as it is braided very finely to ensure a highly impenetrable shield. Cable termination requires seasoned expertise.

• Spiral Shield

The spiral shield consists of several copper wires wound tightly around the cable in a spiral wind. The shielding effect is heightened by winding the shield on twice, each time from different directions in what is referred to as the "double-spiral shield." The cost range for the spiral shield cable lies roughly mid way between the braided shield and the aluminum foil shield cable. Although cable termination operations are comparatively simple, the spiral shield tends to deteriorate when flexed too frequently. It is designed for stationary installation.

• Aluminum Foil Shield

The aluminum foil shield cable consists of aluminum foil fused onto a polyester film and wound around the cable in the form of a tape. Cable termination involves a simple operation and the cable is relatively inexpensive. The aluminum foil cable is recommended for use as stationary cabling.

Aluminum foil cable with a Kevlar cable filler is highly recommended for areas where cables will be routed through metal conduit. The Kevlar filler protects the cable as it passes through the conduit, preventing cable breakage or shorting, even when intense stress is applied to the cable. The aluminum foil cable is currently widely used in function halls and multipurpose track and field stadiums.

AWG is for Indicating conductor size

AWG is the abbreviation for American Wire Gauge. For solid center conductor, numbers are decided by conductor O.D. and for stranded center conductor, numbers are decided by conductor cross sectional area. The AWG numbers for conductors used at Canare are listed in Table 1.

AWG	Conductor cross sec. area (mm ²)	AWG	Conductor cross sec. area (mm ²)
13	2.81	22	0.34, 0.37, 0.39
14	2.18	23	0.29, 0.30, 0.31
15	1.75	24	0.20, 0.22, 0.23
16	1.27	25	0.18
18	1.0	26	0.14, 0.15
20	0.51, 0.56	28	0.08, 0.09
		31	0.04

Table 1: AWG Numbers for Cables Used by Canare

Cables

Star Quad Cables

The Star Quad Story

Canare Star Quad obtains its name from the 4-conductor style construction that minimizes the "loop area" between twists of the conductors. This "double balanced" pairing, reduces susceptibility to electromagnetically induced noise. The improvement in noise rejection is so noticeable, that even SCR dimmer noise (stage lighting consoles), is reduced to less than 1/10 the level found in other 2-conductor microphone cables.

Canare Star Quad is designed for use with microphones but is also excellent for all line-level signals (e.g. mixer to power amps). The 4-conductor Star Quad arrangement, cancels electromagnetically

induced noise from SCR dimmer packs, fluorescent lighting ballasts and AC power transformers. Handling noise is prevented by use of cotton filler material. Excellent frequency response is maintained due to special irradiated polyethylene insulation which provides a low capacitance dielectric.

Canare Star Quad cable with braided shields is super flexible. We use large numbers of thin wire strands in the copper conductors and overall braided shield. We extrude a special compound PVC outer jacket that remains pliant at extremely low temperatures with no wait between cold shipping and installation.

Filler

Canare selects cotton, jute and /or exotic polyester fibers for packing. These fillers prevent stretching and twisting of the inner conductors which can cause noise. Additionally, paper, Mylar and/or cloth tape, bind conductors so cables hold their shape.

Shield

Canare does not use spiral (serve) shields because they can spread apart with use. Our shields are more difficult to manufacture because we use many thin copper strands in a densely woven braid. The shields are super flexible and offer outstanding noise rejection.

Conductors

All Canare microphone cables utilize high-conductivity, annealed copper wires, stranded to form flexible conductors and shields.


Insulation

Canare cables utilize special polymer compounds that reduce capacitive "R-C" filter roll off within the cable and prevent high voltage breakdown. By irradiating the material, the polymer becomes extensively cross-linked, chemically inert, water resistant, and remains flexible at very low temperatures. Irradiated PE is superior to ordinary polyethylene because it is heat resistant. Canare insulation will not shrink back, flow or char when soldering, so you save initial and rework time, and achieve more reliable connections.


Jacket

Canare uses specially formulated PVC compounds that combine to make a tough, strong and durable outer jacket with excellent flexibility. These qualities are retained even at very low temperatures, so Canare cables will not stiffen or crack. Available in 10 attractive colors.

In order to maximize noise rejection, Star Quad must be properly wired to the XLR-3 connector (or terminal block).

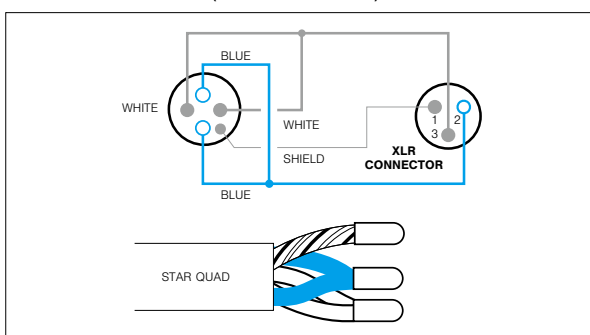

Because the shield density on Canare Cable is very high, it is somewhat difficult to push back the braid and pull the inner conductors through. Instead, we strongly recommend unbraiding the shield by "combing" it out with a pointed tool, beginning at the end of the cable.

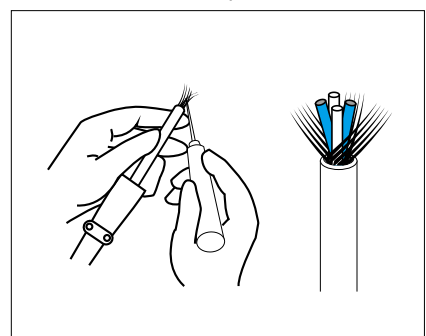

Star Quad Microphone Cables (Single)

Website



Effectively reduce noise levels to 1/10 that of general-purpose, 2-conductor shielded cables.

■ Aluminum Foil Shield



Type	Model	Sales units	Nom. O.D.	Weight	Composition				Electrical characteristics			
					No. of cond.	Cross sec. area (AWG) and cond. comp.	Twist pitch	Shield	Cond. DCR	Shield DCR	Nom. cap.*	Nom. cap.**
		m	mm	kg/100m		mm ² /(AWG) Q'ty/mm	mm		Ω/100m	Ω/100m	pF/m	pF/m
 Jacket color: GRY	L-4E3AT	200 500	3.0	1.2	4	0.08(28) 7/0.12A	16	AL foil	24.6	—	—	—
	L-4E5AT	100 200 400	5.0	3.3	4	0.18(25) 16/0.12A	21	AL foil	10.7	—	164	222
 Jacket colors: GRY BLK	L-4E5ATG		5.0	3.3	4	0.18(25) OFC 1/0.18+30/0.08	21		11.1	—	164	222
	L-4E6AT		6.2	5.0	4	0.31(23) 12/0.18A	25		6.4	—	150	210
	L-4E6ATG		5.8	4.6	4	0.34(22) OFC 1/0.18+63/0.08	35		5.5	—	150	210
 Jacket color: GRY	L-4E5AT-WBS	100 200 400	6.8	8.9	4	0.18 (25) 16/0.12A	21	AL foil + double braid	10.7	—	164	222
	L-4E6AT-WBS		8.6	12.3	4	0.31 (23) 12/0.18A	25		6.4	—	150	210

Insulation: Cross-linked PE Jacket: PVC Dielectric strength: 500V AC/min.

*Capacitance between conductors **Capacitance between conductor and shield.

L-4E*AT Series

- Designed for fixed installations
- Aluminum foil shielding provides 100% coverage
- DuPont Kevlar* filler can resist stretching of cable when pulled through conduit. (excluding L-4E3AT)
- Foil shield and drain wire offer quick assembly work
- L-4E*ATG has an OFC conductor
- L-4E*AT-WBS has a high-density double-braided shield. Its foil and braided shield are insulated by inner jacket.



■ Braided Shield

Type	Model	Sales units	Nom. O.D.	Weight	Composition				Electrical characteristics			
					No. of cond.	Cross sec. area (AWG) and cond. comp.	Twist pitch	Shield Coverage (braid)	Cond. DCR	Shield DCR	Nom. cap.*	Nom. cap.**
		m	mm	kg/100m		mm ² /(AWG) Q'ty/mm	mm		Ω/100m	Ω/100m	pF/m	pF/m
 Jacket colors for L-4E5C: BLK RED ORN YEL GRN BLU GRY L-4E6S: BLK BRN RED ORN YEL GRN BLU PPL GRY WHT	L-4E5C	100 200	4.8	3.4	4	0.15(26) 30/0.08A	18	96%	13.0	2.4	162	200
	L-4E6S		6.0	4.8	4	0.20(24) 40/0.08A	20	94%	9.8	3.1	150	185
 Jacket colors for L-4E5: GRY BLK L-4E6: GRY	L-4E5	100 200	4.8	3.5	4	0.15(26) 30/0.08A	18	96%	13.0	1.9	162	200
	L-4E6	100 200 400	6.5	6.1	4	0.23(24) 20/0.12A	25	96%	8.6	1.6	144	187

Insulation: Cross-linked PE Jacket: PVC Dielectric strength: 500V AC/min.


*Capacitance between conductors. **Capacitance between conductor and shield.

L-4E5C, L-4E6S

- Bend resistant design: the conductor consists of ultrafine 0.08 mm strands offers excellent durability.
- High-density braided shield

L-4E5, L-4E6

- High-density braided shield
- Drain wire included




Frequency Characteristics for L-4E6S (100m)

Multichannel Star Quad Microphone Cables

Website



■ Aluminum Foil Shield

Type	Model	No. of ch.	Sales units	Nom. O.D.	Weight	No. of cond.	Unit composition			Electrical characteristics			
							Cross sec. area (AWG) and cond. comp.	Twist pitch	Ch. O. D.	Cond. DCR	Shield DCR	Nom. cap.*	Nom. cap.**
							mm ² /(AWG) Q'ty/mm	mm	mm	Ω/100m	Ω/100m	pF/m	pF/m
 L-4E3-2AT L-4E3-4AT L-4E3-8AT L-4E3-12AT L-4E3-16AT L-4E3-24AT L-4E4-2AT L-4E4-4AT L-4E4-8AT L-4E4-12AT L-4E4-16AT L-4E4-24AT	L-4E3-2AT	2	100 200 500	8.5	7.3	8	4E3AT Unit 0.08(28) 7/0.12A	16	3.0	24.8	—	—	—
	L-4E3-4AT	4		10.0	11	16							
	L-4E3-8AT	8		13.8	19	32							
	L-4E3-12AT	12		15.6	26	48							
	L-4E3-16AT	16		17.2	32	64							
	L-4E3-24AT	24		21.3	47	96							
	L-4E4-2AT	2		10.5	12	8	4E4AT Unit 0.18(25) 16/0.12A	21	3.7	10.8	—	164	222
	L-4E4-4AT	4		12.3	17	16							
	L-4E4-8AT	8		16.9	31	32							
	L-4E4-12AT	12		18.9	41	48							
	L-4E4-16AT	16		20.9	50	64							
	L-4E4-24AT	24		26.1	76	96							

Jacket color: GRV

Insulation: Cross-linked PE (blue-blue, white-white)

Jacket, inner Jacket: PVC

Dielectric strength: 500V AC/min.

*Capacitance between conductors **Capacitance between conductor and shield.

L-4E3-**AT, L-4E4-**AT

- The multichannel microphone cable is the cable of choice for music auditorium and studio facilities where noise prevention and audio quality are the prime considerations.
- Each unit contains the highly pull-resistant Kevlar* cable filler.
*Kevlar is a trademark of DuPont.
- Drain wire included in each unit.





Fig. 1 Crosstalk Characteristics for L-4E4-4AT (100m)

■ Braided Shield

Type	Model	No.of ch.	Sales units	Nom. O.D.	Weight	No. of cond.	Unit composition				Electrical characteristics			
							Cross sec. area (AWG) and cond. comp.	Twist pitch	Shield coverage (braid)	Ch. O.D.	Cond. DCR	Shield DCR	Nom. cap.*	Nom. cap.**
		m	mm	kg/100m	mm ² /(AWG) Q'ty/mm	mm	%	mm	Ω/100m	Ω/100m	pF/m	pF/m		
 L-4E3-8P Jacket color: BLK (L-4E3-2H) GRY (L-4E3-8P)	L-4E3-2H	2	100 200 500	8.9	9.5	8	0.08(28) 7/0.12A	16	93%	3.4	24.9	3.4	145	170
	L-4E3-2P	2		8.9	8.2	8								
	L-4E3-4P	4		10.9	13	16								
	L-4E3-8P	8		15.3	26	32								
	L-4E3-12P	12		17.4	36	48								
	L-4E3-16P	16		18.9	46	64								
	L-4E3-24P	24		24.0	70	96	0.15(26) 30/0.08A	18	95%	4.0	13.1	2.4	162	200
	L-4E4-2P	2		11.1	13	8								
	L-4E4-4P	4		13.4	21	16								
	L-4E4-8P	8		18.2	34	32								

Insulation: Cross-linked PE (blue-blue, white-white)

Jacket, inner jacket: PVC

Dielectric strength: 500V AC/min.

*Capacitance between conductors **Capacitance between conductor and shield.

L-4E3-2H, L-4E3-**P, L-4E4-**P

- Ideal multichannel cable for PA and live events where cables are laid down and taken back up on a regular basis.
- Each unit of L-4E3-**P and L-4E3-2H contains the highly pull-resistant Kevlar* cable filler.
*Kevlar is a trademark of DuPont.
- The L-4E3-2H is the reinforced version containing a stainless steel wire support.





Fig. 1 Crosstalk Characteristics for L-4E4-4P (100m)

■ Cross-sectional View

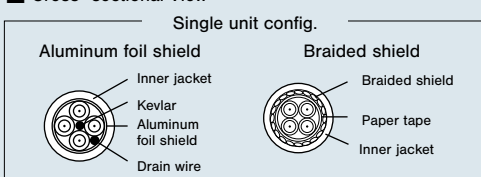

■ Channel color code: Spiral marks on inner jacket (gray).

Unit no.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
Spiral mark	RED	BLU	YEL	GRN	BRN	-	BLU/BLK	YEL/BLK	GRN/BLK	BRN/BLK	BLK	BLU/ORN	YEL/ORN	GRN/ORN	BRN/ORN	ORN	BLU/PNK	YEL/PNK	GRN/PNK	BRN/PNK	PNK	BLU/WHT	YEL/WHT	GRN/WHT



Two-Conductor Shielded Cables (Single)

■ Aluminum Foil Shield

Type	Model	Sales units	Nom. O.D.	Weight	Composition			Electrical characteristics			
		m	mm	kg/100m	No. of cond.	Cross sec. area (AWG) and cond. comp.	Twist pitch	Cond. DCR	Shield DCR	Nom. cap.*	Nom. cap.**
						mm ² /(AWG) Q'ty/mm	mm	Ω/100m	Ω/100m	pF/m	pF/m
 Jacket colors: GRY BLK	L-2B2AT	200 500	3.2	1.3	2	0.18(25) 16/0.12A	25	10.5	—	66	120
 Jacket color: GRY	L-2B2AL	200	3.2	1.1	2	0.18(25) 7/0.18TA Overall tin coated	20	11.3	—	—	—
 Jacket colors: GRY BLK SEPIA	L-2E5AT	200	5.0	4.0	2	0.31(23) 12/0.18A	30	6.2	—	68	140
 Jacket color: GRY	L-2E5AL	200 500	5.0	3.7	2	0.29(23) 7/0.23TA Overall tin coated	30	6.8	—	—	—

Insulation: Cross-linked PE (polyethylene for L-2E5AL and L-2B2AL)

Jacket: PVC

Dielectric strength: 500V AC/min.

*Capacitance between conductors **Capacitance between conductor and shield.

L-2B2AT, L-2E5AT

- Ideal for internal rack wiring.
 - Drain wire included.
 - The L-2E5AT contains the Tetoron cable filler reinforcement material.
- <Fig. 1>




Fig. 1 Pull Load and Stretch Ratio for Cable




Fig. 2 Frequency Characteristics for L-2B2AT (100m)

L-2B2AL, L-2E5AL

- Cables for connecting devices with which wrapping tools can be used.
- Drain wire included.

■ Braided Shield

Type	Model	Sales units	Nom. O.D.	Weight	Composition				Electrical characteristics			
		m	mm	kg/100m	No. of cond.	Cross sec. area (AWG) and cond. comp.	Twist pitch	Shield coverage (braid)	Cond. DCR	Shield DCR	Nom. cap.*	Nom. cap.**
						mm ² /(AWG) Q'ty/mm	mm	%	Ω/100m	Ω/100m	pF/m	pF/m
 L-2T2S Jacket colors L-2T2S: BLK RED ORN YEL BLU GRV L-2E5: BLK	 L-2T2S	100 200	6.0	4.6	2	0.30(23) 60/0.08A	20	94%	6.5	3.1	60	106
	L-2E5	200	4.6	3.0	2	0.15(26) 30/0.08A	18	97%	12.7	2.2	63	117

Insulation: Cross-linked PE

Jacket: PVC

Dielectric strength: 500V AC/min.

*Capacitance between conductors **Capacitance between conductor and shield.


L-2T2S, L-2E5

- Braid coverage of 94% and above provides dense shielding that blocks out electromagnetic noise.
- L-2T2S consists of 60 ultra-fine 0.08 mm strands (30 for L-2E5) in a stranded format that offers excellent durability.
- Highly pliable and durable PVC used for jacket. (Brittle temp. -49°C)

Cables

Two-Conductor Shielded Cables

■ Spiral Shield

Type	Model	Sales units	Nom. O.D.	Weight	Composition				Electrical characteristics			
					No. of cond.	Cross sec. area (AWG) and cond. comp.	Twist pitch	Shield coverage	Cond. DCR	Shield DCR	Nom. cap.*	Nom. cap.**
		m	mm	kg/100m		mm ² /(AWG) Q'ty/mm	mm	%	Ω/100m	Ω/100m	pF/m	pF/m
 MS202 Jacket color: BLK	MS202	200	2.8	1.4	2	0.18 (25) 1/0.18TA + 30/0.08TA	25	91% (spiral)	11.3	3.2	74	145
 MS203 Jacket color: GRY	MS203	200	3.5	2.1	2	0.31(23) 12/0.18TA	30	91% (spiral)	6.5	2.3	—	—

Insulation: Cross-linked PE Jacket: PVC Dielectric strength: 500V AC/min.

*Capacitance between conductors **Capacitance between conductor and shield.

MS202

- Ideal for analog audio internal rack wiring.
- Composite conductors with 1 of 0.18 mm and 30 of 0.08 mm strands.
- Drain wire included.

MS203


- Ideal for internal rack wiring.
- Drain wire included.

Website



Two-Conductor Shielded Multichannel Cables

■ Aluminum Foil Shield

Type	Model	No. of ch.	Sales units	Nom. O.D.	Weight	No. of cond.	Unit composition			Electrical characteristics			
							Cross sec. area (AWG) and cond. comp.	Twist pitch	Ch. O. D.	Cond. DCR	Shield DCR	Nom. cap.*	Nom. cap.**
		m	mm	kg/100m			mm ² /(AWG) Q'ty/mm	mm	mm	Ω/100m	Ω/100m	pF/m	pF/m
 L-2E4-2AL Jacket color: GRY	L-2E4-2AL	2	100 200 500	8.6	7.6	4	0.29(23) 7/0.23TA Overall tin coated	30	3.7	6.9	—	81	144
	L-2E4-4AL	4		10.8	13.1	8							
	L-2E4-8AL	8		14.9	23.7	16							
	L-2E4-12AL	12		16.9	32.0	24							
	L-2E4-16AL	16		18.8	40.0	32							

Insulation: Cross-linked PE Jacket: PVC Dielectric strength: 500V AC/min.

*Capacitance between conductors **Capacitance between conductor and shield.

L-2E4-AL Series


- Used as cables for connecting devices with which wrapping tools can be used.
- Drain wire included in each unit.

Website



No.	Dot line markings
1	—
2	—
3	—
4	—
5	—
6	—
7	—
8	—
9	—
0	—


■ Cross-sectional View



■ Channel color code: color-coded insulation and dot line markings (ch 1 to 10: red, ch 11 to 16: blue) on inner jacket (gray).

Unit no.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Insulation color	RED/ WHT	BLU/ WHT	YEL/ WHT	GRN/ WHT	BRN/ WHT	GRY/ WHT	BLU/ BLK	YEL/ BLK	GRN/ BLK	BRN/ BLK	GRY/ BLK	BLU/ ORN	YEL/ ORN	GRN/ ORN	BRN/ ORN	GRY/ ORN

■ Aluminum Foil Shield

Type	Model	No. of ch.	Sales units	Nom. O.D.	Weight	No. of cond.	Unit composition		Electrical characteristics				
							Cross sec. area (AWG) and cond. comp.	Twist pitch	Ch. O. D.	Cond. DCR	Shield DCR	Nom. cap.*	Nom. cap.**
							mm ² /(AWG) Q'ty/mm	mm	mm	Ω/100m	Ω/100m	pF/m	pF/m
 M202-24AT Jacket color: BLK	M202-2AT	2	100 200 500	6.5	4.8	4	0.18(25) 16/0.12A	30	—	10.5	—	75	135
	M202-4AT	4		8.1	9.0	8							
	M202-8AT	8		11.1	16	16							
	M202-12AT	12		12.5	18	24							
	M202-16AT	16		13.8	24	32							
	M202-24AT	24		16.8	32	48							
	M202-32AT	32		18.6	40	64							
 MR202-24AT Jacket color: BLK	MR202-2AT	2	100 200 500	6.7	4.5	4	0.18(25) 7/0.18A	25	2.7	10.7	—	76	142
	MR202-4AT	4		7.6	6.2	8							
	MR202-8AT	8		11.0	13.2	16							
	MR202-12AT	12		12.7	18.4	24							
	MR202-16AT	16		14.0	22.8	32							
	MR202-24AT	24		17.4	34.0	48							
	MR202-32AT	32		19.1	43.8	64							

Insulation: Cross-linked PE Jacket: PVC Dielectric strength: 500V AC/min.

*Capacitance between conductors **Capacitance between conductor and shield.

M202-AT Series

- Multichannel cable featuring light weight and slim form. At only 16kg for a 50 m length of 24 channel cable, the M202-AT achieves a 47% weight reduction over previous Canare cables.
- Each channel is individually isolated using insulated (PET) aluminum foil shield. <Fig. 1>
- Contains the highly pull-resistant Kevlar cable filler.
- Drain wire included.


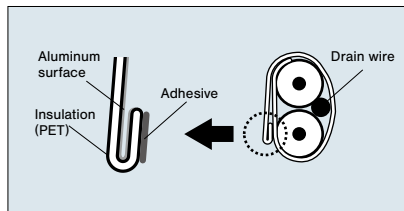


Fig. 1 Aluminum Foil Shield



Crosstalk Characteristics for M202-24AT (100m)

Website



Note:

This series does not have inner jacket, so it cannot be used for fantails.

■ Cross-sectional View



■ Channel color code:

Unit no.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	
Insulation color	RED/ WHT	BLU/ WHT	YEL/ WHT	GRN/ WHT	BRN/ WHT	GRY/ WHT	BLU/ BLK	YEL/ BLK	GRN/ BLK	BRN/ BLK	GRY/ BLK	BLU/ ORN	YEL/ ORN	GRN/ ORN	BRN/ ORN	GRY/ ORN	BLU/ PNK	YEL/ PNK	GRN/ PNK	BRN/ PNK	GRY/ PNK	BLU/ RED	YEL/ RED	GRN/ RED	BRN/ RED	GRY/ BLU	BLU/ BLU	YEL/ BLU	GRN/ BLU	BRN/ BLU	GRN/ YEL	BRN/ YEL	GRY/ YEL


MR202-AT Series

Our bestselling two-conductor multichannel cable featuring AWG25 stranded conductor, 100% shielding by aluminum foil, and drain wire.

- Studio interconnect, portable snake system
- Each channel identified per resistor color-coding
- Aluminum foil shield and drain wire for easy terminate

Note:

Not appropriate for heavy-duty applications.



Crosstalk Characteristics for MR202-24AT (100m)

■ Cross-sectional View



■ Channel color code: Inner jacket color coding and spiral markings.* Insulation inside units: one is clear and the other bears the same color as the spiral markings.

Unit no.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
Insulation color	BRN	RED	ORN	YEL	GRN	BLU	PPL	GRY	WHT	BLK	BRN	RED	ORN	YEL	GRN	BLU	PPL	GRY	WHT	BLK	BRN	RED	ORN	YEL	GRN	BLU	PPL	GRY	WHT	BLK	BRN	RED
Spiral markings	BRN	RED	ORN	YEL	GRN	BLU	PPL	GRY	WHT	BLK	-	RED	ORN	YEL	GRN	BLU	PPL	GRY	WHT	BLK	BRN	-	ORN	YEL	GRN	BLU	PPL	GRY	WHT	BLK	BRN	RED
Inner jacket color	BLK										BRN										RED										ORN	

■ Spiral Shield

Type	Model	No. of ch.	Sales units	Nom. O.D.	Weight	No. of cond.	Unit composition				Electrical characteristics			
							Cross sec. area (AWG) and cond. comp.	Twist pitch	Shield coverage	Ch. O. D.	Cond. DCR	Shield DCR	Nom. cap.*	Nom. cap.**
							mm ² /(AWG) Q'ty/mm	mm	%	mm	Ω/100m	Ω/100m	pF/m	pF/m
 MS202-8P Jacket color: BLK	MS202-2P	2	100 200 500	7.1	5.9	4	0.18 (25) 1/0.18TA + 30/0.08TA	25	91% (spiral)	2.8	11.4	3.3	74	145
	MS202-4P	4		8.2	9.2	8								
	MS202-8P	8		10.9	16.0	16								
	MS202-12P	12		13.6	24.2	24								

Insulation: Cross-linked PE Jacket: PVC Dielectric strength: 500V AC/min.

*Capacitance between conductors **Capacitance between conductor and shield.


MS202-P Series

- Multichannel cable for analog audio.
- Composite conductors with 1 of 0.18 mm and 30 of 0.08 mm strands.
- Easy-to-use color-coded units and spiral shield.
- Drain wire included in each unit.

Website




■ Cross-sectional View

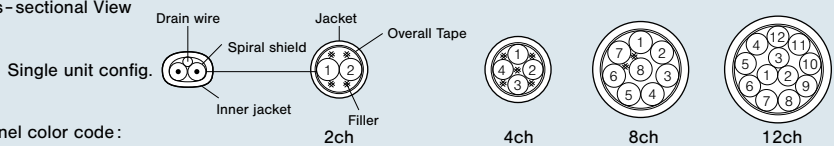

■ Channel color code:

Unit no.	1	2	3	4	5	6	7	8	9	10	11	12
Insulation color	BRN	RED	ORN	YEL	GRN	BLU	PPL	GRY	WHT	BLK	BRN	RED
Spiral markings	BRN	RED	ORN	YEL	GRN	BLU	PPL	GRY	WHT	BLK	-	RED
Inner jacket color	BLK										BRN	

■ Spiral Shield

Type	Model	No. of ch.	Sales units	Nom. O.D.	Weight	No. of cond.	Unit composition				Overall shield coverage (braid)	Electrical characteristics			
							Cross sec. area (AWG) and cond. comp.	Twist pitch	Shield coverage	Ch. O. D.		Cond. DCR	Shield DCR	Nom. cap.*	Nom. cap.**
							mm ² /(AWG) Q'ty/mm	mm	%	mm		Ω/100m	Ω/100m	pF/m	pF/m
 MS203-8BS Jacket color: GRY	MS203-2BS	2	100 200 500	8.9	11	4	0.31(23) 12/0.18TA	30	91% (spiral)	3.5	79%	6.6	2.3	—	—
	MS203-4BS	4		10.3	15	8					80%				
	MS203-8BS	8		13.5	27	16									

Insulation: Cross-linked PE (orange, white) Jacket: PVC Dielectric strength: 500V AC/min.

*Capacitance between conductors **Capacitance between conductor and shield.

MS203-BS Series


- Multichannel version of MS203. (See page 61)
- Overall braided shield enables robust shielding performance.
- Drain wire included in each unit.

Website



No.	Dot line markings
1	—
2	—
3	—
4	—
5	—
6	—
7	—
8	—
9	—
0	—

■ Cross-sectional View

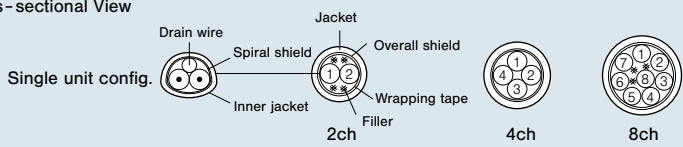

■ Unit ID: by dot line markings

AES/EBU Digital Audio Cables

Website



Ideal for conveying digital audio signals in conformance with AES/EBU and IEC standards.

Type	No. of ch.	Model	Sales units	Nom. O.D.	Weight	Unit composition				Electrical characteristics				Charac-teristic impedance	Attenua-tion
			m	mm	kg/100m	Cross sec. area (AWG) and cond. comp.	Twist pitch	Shield coverage (braid)	Unit O.D.	Cond. DCR	Shield DCR	Nom. cap.*	Nom. cap.**		
 Jacket color: BLU	1	DA206	100 200	7.3	7.5	0.56(20) 7/0.32A	60	95%	—	3.3	1.4	48	73	110	2.6
 Jacket color: BLU	1	DA202	100 200	5.0	3.6	0.18(25) 7/0.18A	32	95%	—	10.6	2.0	48	—	110	5.1
 Jacket color: BLU	1	DA202AT	100 200	4.0	1.6	0.18(25) 7/0.18A	38	—	—	10.6	—	45	—	110	6.7
 Jacket color: BLU	1	DA203AL	100 200	6.0	4.2	0.29(23) 7/0.23TA Overall tin coated	45	—	—	6.8	—	48	95	110	5.4
 Jacket color: BLU	2	DA202F-2P	100 200 500	7.7	6.7	0.18(25) 7/0.18TA	25	91% Spiral shield	3.0	11.3	3.0	47	95	110	5.6
	4	DA202F-4P		8.8	10										
	8	DA202F-8P		11.5	17										
 Jacket color: BLU	2	DA203-2AL	100 200 500	11.8	12.2	0.29(23) 7/0.23TA Overall tin coated	42	—	4.9	6.9	—	48	95	110	5.4
	4	DA203-4AL		13.8	18.9										
	8	DA203-8AL		19.3	33.2										
	12	DA203-12AL		21.9	44.1										

Insulation: Cross-linked PE (DA202F-P: Cross-linked foam PE)

Jacket: PVC

Dielectric strength: 500V AC/min.

*Capacitance between conductors **Capacitance between conductor and shield.

DA206, DA202

- PE rod configuration ensures consistent 110 Ω impedance with large or small bends in cable during installation.
- DA206 ideal for digital audio paths up to 360 m*.
- DA202 ideal for digital audio paths up to 180 m*.
- DA202 contains a drain wire.

DA202AT

- Designed for internal cabling connections on racks.
- Ideal for digital audio paths up to 140 m*.
- Drain wire included.

*Condition: AES3 SR48kHz

DA203-AL Series

- Wrapping tool can be used.
- Ideal for digital audio paths up to 170 m*.
- Drain wire included in each unit.

DA202F Series

- Slim and lightweight.
- DA202F-8P designed to fit snugly with D-sub 25 pin connector.
- Cross-linked foam PE insulation.
- Ideal for digital audio paths up to 140 m*.
- Drain wire included in each unit.

■ Channel Color Coding

DA202F-P: by the insulator color & the spiral markings on the inner jacket (blue).


Unit no.	1	2	3	4	5	6	7	8
Insulator color	BRN, WHT	RED, WHT	ORG, WHT	YEL, WHT	GRN, WHT	BLU, WHT	PPL, WHT	GRY, WHT
Spiral markings	BRN	RED	ORN	YEL	GRN	—	PPL	GRY

DA203-AL: by the insulator color & the spiral markings on the inner jacket (gray).

Unit no.	1	2	3	4	5	6	7	8	9	10	11	12
Insulator color	RED, WHT	BLU, WHT	YEL, WHT	GRN, WHT	BRN, WHT	GRY, WHT	BLU, WHT	YEL, WHT	GRN, WHT	BRN, WHT	GRY, WHT	BLU, WHT
Spiral markings	RED	BLU	YEL	GRN	BRN	—	BLU	YEL	GRN	BRN	BLK	BLU, ORG

■ Cross-sectional View for DA202F-P & DA203-AL

Single unit config.

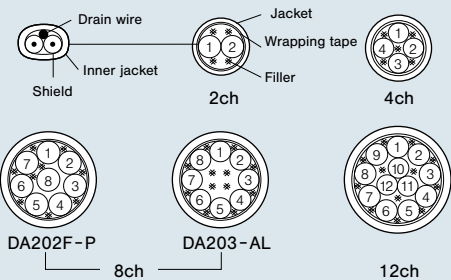

Speaker Cables (Single)

Website



Four-conductor configuration minimizes noise and polyethylene insulation reduces induction rate to boost frequency characteristics

4-conductor Speaker Cable

Type	Model	Pair cross-sec.	Sales units	Nom. O.D.	Weight	Composition				Electrical characteristics	
		mm ²				No. of cond.	Cross sec. area (AWG)	Cond. comp.	Twist pitch	Cond. DCR	Nom. capacitance
 4S8 Jacket colors for 4S6: [GRY] [BLK] [RED] [BLU] [CRE] [WHT] 4S8, 4S11, 4S6G: [GRY] [BLK] 4S8G, 4S11G: [GRY]	 4S6	1.0	100 200 400	6.4	5.4	4	0.51(20)	20/0.18A	45	3.7	125
	 4S8	2.5		8.3	9.5	4	1.27(16)	50/0.18A	70	1.5	145
	 4S11	4.3		10.7	16	4	2.18(14)	41/0.26A	100	0.9	146
	4S6G	1.0		6.4	5.4	4	0.51(20)	20/0.18(OFC)	45	3.7	125
	4S8G	2.5		8.3	9.5	4	1.27(16)	50/0.18(OFC)	70	1.5	145
	4S11G	4.3		10.7	16	4	2.18(14)	41/0.26(OFC)	100	0.9	146

Insulation: polyethylene (red, translucent red, white, translucent white)

Jacket: PVC

Dielectric strength: 500V AC/min.

*Capacitance between conductors.


4S6, 4S8, 4S11

- High-performance PVC jacket, resistant to bending and twisting.
- 4S6 designed to fit snugly with Cannon XLR.

4S6G, 4S8G, 4S11G

- The G versions feature oxygen-free copper (OFC, JIS H3510) conductors.

4-conductor Speaker Cable for Fixed Installation

Type	Model	Pair cross-sec.	Sales units	Nom. O.D.	Weight	Composition				Electrical characteristics	
		No. of cond.				Cross sec. area (AWG)	Cond. comp.	Twist pitch	Cond. DCR	Nom. capacitance	
						mm ²	mm	kg/100m	mm ² /(AWG)	Q'ty/mm	mm
 4S10F Jacket colors for 4S10F, 4S12F, 4S14F, 4S18F: GRY BLK 4S10FG, 4S12FG: GRY	 4S10F	3.5	100 200 400 1000	9.6	15	4	1.75(15)	33/0.26A	100	1.1	144
	 4S12F	5.6		11.6	22	4	2.81(13)	35/0.32A	120	0.7	152
	4S14F	8.0		14.0	32	4	4.02(12)	50/0.32A	120	0.5	—
	4S18F	14.2		17.5	53	4	7.08(9)	88/0.32A	150	0.3	—
	4S10FG	3.5		9.6	15	4	1.75(15)	33/0.26(OFC)	100	1.1	144
	4S12FG	5.6		11.6	22	4	2.8(13)	35/0.32(OFC)	120	0.7	152

Insulation: polyethylene (red, translucent red, white, translucent white)

Jacket: PVC

Dielectric strength: 500V AC/min.

*Capacitance between conductors.


4S10F, 4S12F, 4S14F, 4S18F

- Special supply jacket designed for use in building conduits.

4S10FG, 4S12FG

- The G versions feature oxygen-free copper (OFC, JIS H3510) conductors.

Multichannel Speaker Cables

Type	Model	Pair cross-sec.	Sales units	Nom. O.D.	Weight	Unit composition				Electrical characteristics	
		mm ²	m	mm	kg/100m	No. of cond.	Cross sec. area (AWG) and cond. comp.	Twist pitch	Ch. O.D.	Cond. DCR	Nom. capacitance*
							mm ² /(AWG) Q'ty/mm	mm	mm	Ω/100m	pF/m
 S410-4P Jacket color: GRY	S410-4P	2.0	100 200 500	15.0	26	16	1.0(18) 127/0.10(OFC)	50	5.1	1.9	165
	S410-6P	2.0		18.3	39	24					
	S410-8P	2.0		21.6	53	32					

Insulation: Polyethylene

Jacket: PVC

Dielectric strength: 500V AC/min.

*Capacitance between conductors.

S410-P Series

- Low crosstalk performance
- Ideal for use in multi-way speaker systems.
- Oxygen-free copper (OFC, JIS H3510) conductors.





Fig. 1 Crosstalk Characteristics for S410-4P

Website



Cross-sectional View of S410-4P and Channel color coding

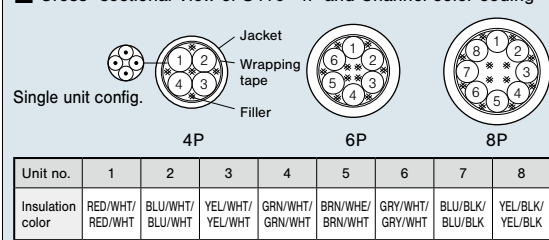

2-conductor Speaker Cable

Type	Model	Sales units	Nom. O.D.	Weight	Composition				Electrical characteristics	
					No. of cond.	Cross sec. area (AWG)	Cond. comp.	Twist pitch	Cond. DCR	Nom. capacitance*
		m	mm	kg/100m		mm ² /(AWG)	Q*ty/mm	mm	Ω/100m	pF/m
 2S11F	2S7F	100 200 400	6.8	5.2	2	1.27 (16)	50/0.18A	50	1.5	56
	2S9F		8.9	8.7	2	2.18 (14)	41/0.26A	60	0.9	56
	2S11F		11.1	14	2	3.62 (12)	45/0.32A	80	0.5	55
	2S14F		13.8	21	2	5.63 (10)	70/0.32A	90	0.3	55
	2S7FG		6.8	5.2	2	1.27 (16)	50/0.18(OFC)	50	1.5	56
	2S9FG		8.9	8.7	2	2.18 (14)	41/0.26(OFC)	60	0.9	56
	2S11FG		11.1	14	2	3.62 (12)	45/0.32(OFC)	80	0.5	55
	2S14FG		13.8	21	2	5.63 (10)	70/0.32(OFC)	90	0.3	55

Insulation: polyethylene (orange, white) Jacket: PVC Dielectric strength: 500V AC/min.

*Capacitance between conductors.

2S7F, 2S9F, 2S11F, 2S14F

- Special supple jacket designed for use in building conduits.


2S7FG, 2S9FG, 2S11FG, 2S14FG

- The G versions feature oxygen-free copper (OFC, JIS H3510) conductors.

Website



Multicore Speaker Cable

Type	Model	Sales units	Nom. O.D.	Weight	Composition			Electrical characteristics	
					No. of cond.	Cross sec. area and cond. comp.	Cond. O. D.	Cond. DCR	Nom. capacitance*
		m	mm	kg/100m		mm ² /(AWG) Q*ty/mm	mm	Ω/100m	pF/m
 8S15G		100	14.9	33.0	8	2.49 (14) 98/0.18 (OFC)	3.26	0.7	51

Insulation: polyethylene Jacket: PVC Dielectric strength: 500V AC/min.

*Capacitance between adjacent conductors.

8S15G

- Eight-core speaker cable ideally suited for use with Neutrik speakON NL8 and a line array speaker.
- Oxygen-free copper (OFC, JIS H3510) conductors.


Website




Technical Note

Four-conductor Configuration Minimizes Noise

Speaker cable must accommodate relatively high signal levels, typically tens to hundreds of watts of RMS power. Electromagnetic interference (EMI) can radiate from these speaker lines directly into adjacent low voltage cables (i.e. microphone, video, lines, etc.). Canare solves this problem by using a 4-conductor "Star Quad" configuration in all of our 4S-series speaker cables. Because every conductor is located the same distance from center, the opposing magnetic fields are cancelled out. Attenuation of magnetic field radiation is superior when compared to a standard 2-conductor speaker wire.



Four-conductor cable



Two-conductor cable

Selecting the Right Speaker Cable

Always try to keep speaker cables as short as possible and select cable models that offer a higher damping factor; 20-50 for music (i.e. connect sound) and 10-20 for speech (i.e. sport stadiums). The greater the damping factor (DF), the better the ability to control speaker excursion to create sharp, clear quality in the low end frequency range.

$$\text{damping factor} = \frac{\text{speaker impedance}}{\text{power amp. output impedance} + \text{cable cond. resist. for total loop}}$$

As the above formula shows, a higher conductor resistance causes a lower damping factor, which prevents even top quality power amps from performing at peak optimum levels.

Speaker Cable Length obtained from the Damping Factor (reference)

Model	Cross-sec. Area	Cond. Resist.	Cond. Resist. for Total Loop	Cable Length (m)	
	mm ² /AWG	Ω/100m	Ω/m	DF = 20	DF = 50
4S6(G)	1.02/17 (pair)	1.85	0.037	9.5	3.0
4S8(G)	2.52/14 (pair)	0.75	0.015	23.3	7.3
4S11(G)	4.36/11 (pair)	0.45	0.009	38.9	12.2
4S10F(G)	3.50/15 (pair)	0.55	0.011	31.8	10.0
4S12F(G)	5.62/13 (pair)	0.35	0.007	50.0	15.7
4S14F(G)	8.00/12 (pair)	0.25	0.005	70.0	22.0
4S18F(G)	14.16/9 (pair)	0.15	0.003	116.7	36.7
S410-*P	2.00/18 (pair)	0.95	0.019	18.4	5.8
2S7F(G)	1.27/16	1.5	0.030	11.7	3.7
2S9F(G)	2.18/14	0.9	0.018	19.4	6.1
2S11F(G)	3.62/12	0.5	0.010	35.0	11.0
2S14F(G)	5.63/10	0.3	0.006	58.3	18.3
8S15G	2.49/14	0.7	0.014	25.0	7.9

Conditions: Speaker impedance = 8 Ω, Power amplifier output impedance = 0.05 Ω

Cables

OFC Line, A/V Composite Cables

OFC Line Cables


Type	Model	Sales units	Nom. O.D.	Weight	Inner cond.		Insulation	Outer conductors	Electrical characteristics		
					Cross sec. area (AWG) and cond. comp.	Nom. O.D.			Chan. DCR	Shield. DCR	Nom. cap.*
		m	mm	kg/100m	mm ² /(AWG) Q'ty/mm	mm		mm/ends/carriers	Ω/100m	Ω/100m	pF/m
 GS-6 Jacket colors for GS-4: BLK GS-6: BLK RED ORN YEL GRN BLU	GS-4	200	4.0	2.7	0.39(22) 50/0.1(OFC)	0.82	1.82	Carbon plastic shield + 0.1 (OFC)/6/16 93%	4.7	3.1	—
	GS-6	100 200	5.8	5.0	1.0(18) 127/0.1(OFC)	1.3	3.0	Carbon plastic shield + 0.1 (OFC)/8/16 92%	1.8	2.5	160

Insulation: polyethylene Jacket: PVC Dielectric strength: 500V AC/min.

*Capacitance between conductor to shield.

GS-4, GS-6

- Outer conductor of fine 0.1 mmφ OFC strands provide a highly flexible braided configuration. (See photographs A and B)



- Center conductor with 127 fine 0.1 mmφ strands (50 for GS-4) increases durability.

Note:
The GS-4 and GS-6 have a layer of carbon plastic shield underneath the braided shield (see Fig. 1) to block out noise. Shorting will result if this shield contacts the center conductor line, so special care must be taken when connecting the cable.




Fig. 1




Fig. 2 Frequency Characteristics for GS-6 (100m, 100Ω → 1MΩ load)

Website



A/V Composite Cables

Used for linking audio video equipment and as extensions for video cameras.

Type		Model	Sales units	Nom. O.D.	Weight	Unit type V: Video A: Audio C: Control line	Unit composition			Electrical characteristics	
							Cross sec. area Conductor comp.	Shield coverage	Unit O.D.	Characteristic impedance	Attenuation
			m	mm	kg/100m		mm ² /(AWG) Q'ty/mm	%	mm	Ω	dB/100m (10 MHz)
 A2V1		A2V1	100 200	9.7	11	V Video 3C-2V × 1	0.20(25) 1/0.5A	97% (braid)	4.4	75	4.1
	A Audio L-2B2AT × 2	Refer to L-2B2AT				Alminum foil shield	3.2	—	—		
		A2V2-L		11.0	16	V Video 3C-2V × 2	0.20(25) 1/0.5A	97% (braid)	4.4	75	4.1
						A Audio L-2B2AT × 2	Refer to L-2B2AT	Alminum foil shield	3.2	—	—
						C Control lines 0.2mm ² × 4	0.20(24) 18/0.12A	—	1.3	—	—
		A2V1B		11.1	13	V Video 3C-2VS × 1	0.18(25) 7/0.18A	97% (braid)	4.4	75	4.5
						A Audio 4E3 Unit × 2	0.08(28) 7/0.12A	93% (braid)	3.4	—	—
		A2V2B		12.3	17	V Video 3C-2VS × 2	0.18(25) 7/0.18A	97% (braid)	4.4	75	4.5
						A Audio 4E3 Unit × 2	0.08(28) 7/0.12A	93% (braid)	3.4	—	—
		A3V2-FB		12.4	17	V Video 3CFB Unit × 2	0.33(22) 1/0.65A	91% (braid) + Alminum foil	4.4	75	3.7
A Audio L-2B2AT × 3			Refer to L-2B2AT			Alminum foil shield	3.2	—	—		

Jacket color: **BLK**

Jacket: PVC Dielectric strength: 500V AC/min.

A2V1, A2V2-L

- Designed for fixed installation.

A2V1B, A2V2B

- Ideal for locations requiring cable bending.

A3V2-FB



- 3 balanced audio channels and 2 video coax channels for ENG, EFP, or OB applications.

Website



DMX Cables

Designed for DMX 512: commonly used to stage lighting control.

Type	Model	Sales units	Nom. O.D.	Weight	No. of cond.	Conductors		Shield		Cond. DCR	Characteristic impedance
						Cross sec. area (AWG) and cond. comp.	Twist pitch	Foil	Braid comp. (coverage)		
		m	mm	kg/100m		mm ² /(AWG) Q'ty/mm	mm		mm/ends/carries	Ω/100m	Ω
 Jacket colors: BLK GRY WHT	DMX203-2P	100 200 500	7.9	7.9	4 (2 pair)	0.35(22) 44/0.10TA	25	AL	0.10TA/10/24 (94%)	5.9	110
 Jacket color: BLK	DMX203	100 200	6.0	5.0	2 (1 pair)	0.35 (22) 44/0.10TA	45	AL	0.10TA/10/24 (94%)	5.8	110
 Jacket color: BLK	DMX403	100 200	6.5	6.2	4 (quad)	0.35 (22) 44/0.10TA	50	AL	0.10TA/10/24 (94%)	5.8	110

Insulation: Cross-linked PE Jacket: Frame retardant PVC Dielectric strength: 500V AC/min.

DMX203-2P

- Standard DMX cable
- PE filler rods ensure consistent 110Ω impedance

DMX203

- Single-pair cable suitable for RDM (Remote Device Management) bidirectional communication.
- PE filler rods ensure consistent 110Ω impedance

DMX403

- Slim profile 4-conductor cable
- Can be easily inserted into Neutrik NC5 connector.
- More flexible than DMX203-2P

Website



RS422 Cables

Type	Cross-section view	Model	Sales units	Nom. O.D.	Weight	Unit type	Unit composition			Overall Shield coverage	Conductor resistance	Characteristic impedance
							Cross sec. area (AWG) and cond. comp.	Shield coverage	Unit O.D.			
			m	mm	kg/100m		mm ² /(AWG) Q'ty/mm	%	mm	%	Ω/100m	Ω
 Jacket color: BLK		A2C3	100 200 500	6.5	5.5	A Digital lines two conductor shielded × 2	0.09(28) 7/0.127TA	90% Spiral shield	2.5	—	25.3	110
						C Control lines 0.2mm ² × 3	0.22(24) 11/0.16TA	—	1.24		9.0	—
 Jacket color: BLK		A2C3-SS		7.0	7.2	A Digital lines two conductor shielded × 2	0.09(28) 7/0.127TA	90% Spiral shield	2.5	91% Spiral shield	25.3	110
						C Control lines 0.2mm ² × 3	0.22(24) 11/0.16TA	—	1.24		9.0	—

Insulation: Cross-linked foam PE Jacket: Frame retardant PVC Dielectric strength: 500V AC/min.

A2C3

- Short distance version of the RS422 class cables.
- Irradiated foam core PE used for the insulation in the digital signal unit.

A2C3-SS

- Created by adding an overall spiral shield to the A2C3 to heighten shielding performance.

Website



Ethernet Cables

Website



Canare has a variety of ethernet cables available. This allows you to choose between flexible or standard types to suit your needs.

Flexible and Rugged

Type	Model	Shield type	Sales units	Nom. O.D.	Weight	Conductors		Impedance	Insertion loss		
			m	mm	kg/100m	Cross sec. area & composition	DCR		100 MHz	250 MHz	500 MHz
 Jacket color: BLK	New RJC6A-4P-SFM Cat6A	Overall foil and braid (SF/UTP)	100 200	8.6	8.9	0.26 (23) 1/0.57A	8.2	100	19.1	31.1	45.3
 Jacket color: BLK	RJC5E-4P-WJ Cat5e	N/A (U/UTP)	100 200	7.4	5.4	0.22 (24) 1/0.53A	8.8	100	22.0	—	—
 Jacket color: BLK	RJC5ES-4P-BS Cat5e	Overall braid (S/UTP)	100 200	6.7	6.1	0.22 (24) 7/0.20A	9.5	100	44.0	—	—

Insulation: polyethylene

Jacket: PVC

Dielectric strength: 700V AC/min

RJC6A-4P-SFM

- Flexible and easy-to-use CAT6A STP cable.
- 23 AWG solid conductors
- High-density braided shield (87% coverage)
- Abrasion resistance PVC jacket

RJC5E-4P-WJ

- Flexible and easy-to-use CAT5e UTP cable.
- 24 AWG solid conductors

RJC5ES-4P-BS

- Super flexible CAT5e STP cable for short distance. (max. 50 m)
- 24 AWG stranded conductors
- High-density braided shield (90% coverage)

Standard

Type	Model	Shield type	Sales units	Nom. O.D.	Weight	Conductors		Impedance	Insertion loss(dB/100m)		
			m	mm	kg/100m	Cross sec. area & composition	DCR		100 MHz	250 MHz	500 MHz
 Jacket colors: BLK RED BLU LG WHT	RJC6A-4P-F Cat6A HDBT Recommended	Overall foil (F/UTP)	100 200	7.5	5.2	0.23 (24) 1/0.54A	9.4	100	19.1	31.1	45.3
 Jacket colors: BLK LG	RJC6-4P-F Cat6 HDBT Recommended	Overall foil (F/UTP)	100 200	7.0	5.0	0.23 (24) 1/0.54A	9.4	100	19.8	32.8	—
 Jacket color: BLK	RJC6-4P+ Cat6	N/A (U/UTP)	305	6.0	3.8	0.23 (23) 1/0.55A	9.4	100	19.8	32.8	—
 Jacket color: LG	RJC5E-4P+ Cat5e	N/A (U/UTP)	305	5.0	3.0	0.20 (24) 1/0.50A	9.4	100	22.0	—	—

Insulation: polyethylene

Jacket: PVC

Dielectric strength: 700V AC/min.

RJC6A-4P-F

- Standard CAT6A STP cable
- Tightly twisted 24 AWG solid conductors
- Length markings on jacket

RJC6-4P+

- Standard CAT6 UTP cable
- 23 AWG solid conductors
- Length markings on jacket
- UL 444 type CM
- Packaged in a pull box

RJC6-4P-F

- Standard CAT6 STP cable
- 24 AWG solid conductors
- Length markings on jacket

RJC5E-4P+

- Standard CAT5e UTP cable
- 24 AWG solid conductors
- Length markings on jacket
- UL 444 type CM
- Packaged in a pull box

* "HDBaseT" and "HDBaseT Logo" are registered by HDBaseT Alliance.


75Ω Coaxial Cables

Website



Analog to digital. HD to UHD. Canare 75Ω coaxial cable series expands the range of choices for any kind of video formats.

■ Ultra Coax 12G-SDI

Type	Model	Sales units	Nom. O.D.	Weight	Inner cond.		Insulation	Outer conductors		Inner cond. resist.	Outer cond. resist.	Static capacity	Characteristic impedance	Attenuation	NVP
		m	mm	kg/100m	Comp.	O.D.	O.D.	Foil	Braid comp. (coverage)	Ω/km	Ω/km	pF/m	Ω	dB/100m (6 GHz)	%
					(AWG) Q'ty/mm	mm	mm		mm/ends/carriers						
	 L-3.3CUHD	100 200	5.5	4.1	(21) 1/0.75A	0.75	3.3	Cu	0.12TA/8/16 (92%)	41.4	14.9	55	75	68.5	82
	 L-5.5CUHD	100 200 500 1000	7.7	7.1	(16) 1/1.35A	1.35	5.55	Cu	0.12TA/8/24 (91%)	12.8	10.3	52	75	39.1	86
	L-8CUHD	100 200 500 1000	11.1	14.1	(13) 1/2.00A	2.00	8.26	Cu	0.16TA/8/24 (90%)	5.8	6.3	52	75	27.9	86

Jacket colors: **BLK** and others

Jacket: PVC Dielectric strength: 1000V AC/min.

L-CUHD Series

- Specially designed for 12G-SDI
- The max. transmission distance of 4K UHD over L-5.5CUHD single link able to reach 100 m or longer*.
- *Depending on receiving equipment.
- As handy as conventional coaxial cables.
- Copper foil and high-density tinned copper braided shielding.
- Highly-foamed multi-layer PE insulation

Note 1: Designed for fixed installation, please avoid repeated bending or external pressure.

Note 2: Cable strippers (TS100 series) cannot be used for L-5.5CUHD and L-8CUHD.

Website



■ Super Coax

Type	Model	Sales units	Nom. O.D.	Weight	Inner cond.		Insulation	Outer conductors		Inner cond. resist.	Outer cond. resist.	Static capacity	Characteristic impedance	Attenuation	NVP
		m	mm	kg/100m	Comp.	O.D.	O.D.	Foil	Braid comp. (coverage)	Ω/km	Ω/km	pF/m	Ω	dB/100m (1.5 GHz)	%
					(AWG) Q'ty/mm	mm	mm		mm/ends/carriers						
	 L-2.5CHD	100 200	4.2	2.6	(23) 1/0.59A	0.59	2.59	AL	0.12TA/7/16 (95%)	66.9	16.9	53	75	43.1	82
	L-4CHD		6.1	5.2	(20) 1/0.82A	0.82	3.68	AL	0.14TA/8/16 (95%)	36.4	11.4	53	75	30.6	82
	 L-4.5CHD		7.0	6.2	(18) 1/1.02A	1.02	4.57	AL	0.14TA/6/24 (91%)	23.3	9.9	53	75	25.1	81
	L-5CHD		7.7	7.4	(17) 1/1.20A	1.20	4.9	AL	0.14TA/7/24 (93%)	16.1	8.2	53	75	22.5	85
	L-6CHD		8.9	9.0	(16) 1/1.40A	1.40	6.1	AL	0.14TA/8/24 (92%)	11.8	7.7	53	75	19.0	83
	 L-7CHD		10.2	13.0	(14) 1/1.80A	1.80	7.3	AL	0.16TA/8/24 (92%)	7.1	6.1	53	75	15.9	84
	L-8CHD		11.1	13.5	(12) 1/2.00A	2.00	8.2	AL	0.16TA/8/24 (89%)	5.8	6.3	53	75	14.1	84
Jacket colors: BLK and others															
	L-2.5CHLT	100 200	4.2	1.8	(23) 1/0.59A	0.59	2.59	AL	0.14TCCA/6/16 (95%)	66.9	21.5	53	75	43.1	82
Jacket colors: BLK and others															

Jacket: PVC Dielectric strength: 1000V AC/min.

L-CHD Series

- Best suited to 3G-SDI/HD-SDI transmission.
- Highly-foamed PE insulation allows further improvement in the attenuation characteristics.
- Multi-layer insulation in which to each layer is given a different foaming ratio is used to increase strength.
- High-density tinned copper braided shield with aluminum foil brings excellent shielding.
- Solid conductor

L-2.5CHLT

- Ideal for an O.B. van installation.
- Tinned copper-clad aluminum (CCA) braided shield brings an advantage in weight-saving.
- 30% lighter than L-2.5CHD, yet the same attenuation.
- Space-saving slim design: O.D. 4.2 mm
- High-density braided shield with aluminum foil
- Highly-foamed PE insulation
- Solid conductor

Note 1: Designed for fixed installation, please avoid repeated bending or external pressure.

Note 2: L-2.5CHLT has less connection strength with the connector BCP-B25HD compared with L-2.5CHD.

Note 3: Availability for Cable Stripper TS100 Series:
OK: L-2.5CHD and L-2.5CHLT, N/A: others

Mobile Coax

Type	Model	Sales units	Nom. O.D.	Weight	Inner cond.		Insulation	Outer conductors		Inner cond. resist.	Outer cond. resist.	Static capacity	Characteristic impedance	Attenuation	NVP
					Comp.	O.D.	O.D.	Braid comp. (coverage)							
		m	mm	kg/100m	(AWG) Q'ty/mm	mm	mm	mm/ends/carriers		Ω/100m	Ω/100m	pF/m	Ω	dB/100m (750 MHz)	%
 Jacket colors: BLK and others	New L-5.5CUHWS	100 200 300	8.1	8.6	(16) 7/ Compact strand	1.30	5.56	0.10TA/10/24 (92%) 0.10TA/10/24 (90%)		1.4	0.6	54	75	16.7	82.5
	L-2.5CHWS	100 200	4.2	3.2	(24) 7/0.20A	0.6	2.6	0.10TA/8/16 (95%) 0.10TA/9/16 (94%)		8.5	1.0	53	75	37.4	81
 Jacket colors: BLK and others	L-4.5CHWS	100 200	7.2	6.6	(20) 7/0.34A	1.02	4.57	0.10A/8/24 (93%) 0.10A/9/24 (95%)		3.3	0.8	53	75	22.8	79.5
 Jacket colors: BLK and others	L-3CFW	100 200	5.8	5.1	(22) 1/0.65A	0.65	3.1	0.12A/5/24 (94%) 0.12A/6/24 (94%)		5.5	0.7	55	75	33.1	79
	L-5CFW	100 200 1000	7.7	8.1	(18) 1/1.05A	1.05	5.0	0.12A/7/24 (93%) 0.12A/9/24 (96%)		2.1	0.5	55	75	19.4	79

Jacket: PVC Dielectric strength: 1000V AC/min.

L-5.5CUHWS **12G-SDI**

- Specially designed for 12G-SDI mobile applications
- Flexible and low loss structure
- Highly-foamed PE insulation
- High-density double braided shield

Note: L-5.5CUHWS is specially designed as a cable for mobile use. Refer to "Typical Transmission Distance as per SMPTE Standard" on page74 for the length of the cable to be used.

L-CFW Series

- Designed for mobile applications
- Solid center conductor
- Foamed PE insulation
- High-density double braided shield

Website



L-CHWS Series

- Designed for mobile applications
- Flexible stranded center conductor
- Highly-foamed PE insulation
- High-density double braided shield

Note: Cable strippers (TS100 series) cannot be used for Mobile Coax.

Low Loss Coax

Type	Model	Sales units	Nom. O.D.	Weight	Inner cond.		Insulation	Outer conductors		Inner cond. resist.	Outer cond. resist.	Static capacity	Characteristic impedance	Attenuation	NVP
					Comp.	O.D.	O.D.	Foil	Braid comp. (coverage)						
		m	mm	kg/100m	(AWG) Q'ty/mm	mm	mm		mm/ends/carriers	Ω/100m	Ω/100m	pF/m	Ω	dB/100m (750 MHz)	%
 Jacket colors for L-2.5CFB: BLK L-3CFB: BLK and others L-4CFB: BLK and others L-5CFB: BLK and others L-7CFB: BLK	L-2.5CFB	100 200	4.0	2.4	(25) 1/0.50A	0.50	2.4	AL	0.12TA/6/16 (92%)	9.3	2.0	55	75	37.0	79
	L-3CFB		5.5	4.0	(22) 1/0.65A	0.65	3.1	AL	0.14TA/6/16 (91%)	5.5	1.6	55	75	29.1	79
	L-4CFB		6.1	4.9	(20) 1/0.80A	0.80	3.7	AL	0.14TA/8/16 (93%)	3.6	1.1	55	75	23.6	79
	L-5CFB		7.7	7.3	(18) 1/1.05A	1.05	5.0	AL	0.14TA/7/24 (93%)	2.1	0.8	55	75	17.7	79
	L-7CFB		10.2	13.0	(15) 1/1.50A	1.50	7.3	AL	0.18TA/8/24 (95%)	1.0	0.5	55	75	13.4	79

Jacket: PVC Dielectric strength: 1000V AC/min.

L-CFB Series

- Suited to HD video signals
- High-density tinned copper braided shield with aluminum foil
- Solid center conductor
- Foamed PE insulation

Note: Designed for fixed installation, please avoid repeated bending or external pressure.

Website



■ Standard Coax (Solid PE Insulation)

Type	Model	Sales units	Nom. O.D.	Weight	Inner cond.		Insulation	Outer conductors	Inner cond. resist.	Outer cond. resist.	Static capacity	Characteristic impedance	Attenuation	NVP
		m	mm	kg/100m	Comp.	O.D.	O.D.	Braid composition (coverage)						
					(AWG) Q'ty/mm	mm	mm	mm/ends/carriers						
 L-3C2VS Jacket colors: BLK and others	L-1.5C2VS	200	2.9	1.3	(31) 7/0.09A	0.27	1.6	0.10A/5/16 (94%)	41.9	3.3	69	75	8.7	66
	L-3C2VS	100 200	5.5	4.5	(25) 7/0.18A	0.54	3.1	0.12A/7/16 (94%)	10.5	1.9	67	75	4.5	66
	 LV-61S	153	6.1	5.0	(24) 7/0.20A	0.60	3.6	0.12A/6/24 (95%)	8.5	1.3	67	75	3.8	66
	L-5C2VS	100 200	7.4	6.8	(22) 7/0.26A	0.78	4.8	0.12A/7/24 (93%)	5.0	1.2	67	75	2.9	66
 L-3C2V Jacket colors: BLK and others	L-2.5C2V	100 200	4.0	2.4	(26) 1/0.40A	0.40	2.4	0.12TA/6/16 (94%)	19.2	2.1	69	75	5.2	66
	L-3C2V		5.4	4.3	(25) 1/0.50A	0.50	3.1	0.14TA/5/24 (97%)	9.3	1.2	67	75	4.1	66
	L-5C2V		7.4	7.2	(20) 1/0.80A	0.80	4.9	0.14TA/7/24 (94%)	3.6	0.8	67	75	2.5	66
 L-3C2W Jacket color: BLK	L-3C2W	100 200	6.5	7.0	(25) 1/0.50A	0.50	3.1	0.14TA/5/24 (97%) 0.14TA/5/24 (93%)	9.3	0.6	67	75	4.1	66
	L-5C2W		8.3	11.0	(20) 1/0.80A	0.80	4.9	0.14TA/7/24 (94%) 0.14TA/7/24 (95%)	3.6	0.4	67	75	2.5	66
	LV-77S	153	7.7	9.0	(22) 7/0.26A	0.78	4.8	0.12A/7/24 (92%) 0.12A/8/24 (95%)	5.0	0.6	67	75	3.4	66

Jacket: PVC Dielectric strength: 1000V AC/min.

L-1.5C2VS, L-3C2VS, L-5C2VS, LV-61S

- Ideal for locations requiring cable bending.
- Flexible stranded center conductor
- High-density braided shield
- LV-61S is equivalent to RG-59B/U

L-2.5C2V, L-3C2V, L-5C2V

- Solid center conductor
- High-density tinned copper braided shield

L-3C2W, L-5C2W

- Solid center conductor
- High-density tinned copper double braided shield

LV-77S

- Ideal for locations requiring cable bending.
- Flexible stranded center conductor
- High-density double braided shield

Website



Analog HD Coax

Type	Model	Sales units	Nom. O.D.	Weight	Inner cond.		Insulation	Outer conductors		Inner cond. resist.	Outer cond. resist.	Static capacity	Characteristic impedance	Attenuation	NVP
					Comp.	O.D.		Foil	Braid composition (coverage)						
		m	mm	kg/100m	(AWG) Q'ty/mm	mm	mm		mm/ends/carriers	Ω/100m	Ω/100m	pF/m	Ω	dB/100m (10 MHz)	%
 Jacket colors: BLK	L-3C-AHD	300	5.5	3.0	(21) 1/0.75A	0.75	3.3	AL	0.14AL/4/24 (84%)	4.1	3.7	55	75	2.5	82

Jacket: PVC Dielectric strength: 1000V AC/min.

L-3C-AHD

- Cost effective aluminum alloy braided shield
- Recommended for an analog high definition video surveillance system.
- Fits for AHD, HD-TVI and HD-CVI, and also for HD-SDI or EX-SDI
- Highly-foamed PE insulation for better transmission characteristics
- Packaged in REELEX pull box

Note 1: The aluminum braid cannot be soldered. BNC crimp plug for L-3C-AHD: BCP-A3AHD (see page31)
Note 2: Designed for fix installation

Nominal Attenuation

dB/100m

NTSC D1 7MHz	NTSC WD1 10MHz	AHD 1080/30p 36MHz	HD-TVI 1080/30p 48MHz	EX-SDI 1080/30p 135MHz		HD-SDI 750MHz	3G-SDI 1500MHz
2.0	2.5	4.9	5.7	10.1	14.3	24.2	34.7

Website



Cables

75Ω Coaxial Cables

75Ω Triaxial Cables

Type	Model	Sales units	Nom. O.D.	Weight	Inner cond.		Insulation 1	Outer cond.1	Insulation 2	Outer cond.2	Electrical characteristics			Charac-teristic impedance	Attenu-ation	NVP
					Comp.	O.D.					Inner cond. resistance	Outer cond. resistance	Static capacity			
		m	mm	kg/100m	(AWG) Q'ty/mm	mm	mm	mm/ends/ carriers	mm	mm/ends/ carriers	Ω/100m	Ω/100m	pF/m	Ω	dB/100m (10 MHz)	%
 L-5CFTX Jacket colors: BLK RED GRN	L-5CFTX	100 200	8.8	12.0	(19) 1/1.0A	1.0	4.8	0.14A/6/24 (91%)	6.4	0.16A/8/24 (95%)	2.3	—	55	75	2.2	79
	L-4CFTX	100 200	9.1	10.5	(20) 1/0.80A	0.80	3.7	0.14A/7/16 (93%)	5.5	0.14A/7/24 (94%)	3.64	—	55	75	3.0	79
	L-7CFTX	100 200 500	11.0	15.4	(16) 1/1.40A	1.40	6.5	0.14A/8/24 (93%)	8.7	0.14A/8/24 (88%)	1.18	—	55	75	1.7	79

Insulation : 1: foamed PE 2: polyethylene Dielectric strength : 1000V AC/min.

- For digital or analog broadcast camera applications.
- Abrasion-resistance PVC jacket.

Website



75Ω Multichannel Coaxial Cables

Type	Model	No. of ch.	Sales units	Nom. O.D.	Weight	Unit composition						Inner cond. resist.	Outer cond. resist.	Charac-teristic impedance	Attenua-tion	NVP
						Inner cond.		Insulation	Outer conductors		Unit O.D.					
			Comp.	O.D.	O.D.	Foil	Braid comp. (coverage)	Ω/100m	Ω/100m	Ω		dB/100m (750 MHz)	%			
			m	mm	kg/100m	(AWG) Q'ty/mm	mm	mm		mm/ends/carriers	mm	Ω/100m	Ω/100m	Ω	dB/100m (750 MHz)	%
 V4-*CFB Jacket color: BLK Insulation: Foamed PE	V3-3CFB	3	100 500	11.5	14	(22) 1/0.65A	0.65	3.1	AL	0.14TA/6/16 (91%)	4.4	5.6	1.6	75	29.1	79
	V4-3CFB	4		13.0	19											
	V5-3CFB	5		14.2	23											
	V3-4CFB	3		12.9	18	(20) 1/0.80A	0.80	3.7	AL	0.14TA/8/16 (93%)	5.0	3.6	1.1	75	24.3	79
	V4-4CFB	4		14.4	23											
	V5-4CFB	5		16.1	29											
	V3-5CFB	3		17.1	29	(18) 1/1.05A	1.05	5.0	AL	0.14TA/7/24 (93%)	6.5	2.1	0.8	75	17.7	79
	V4-5CFB	4		18.8	36											
	V5-5CFB	5		21.1	46											
 V4-2.5CHW Jacket color: BLK Insulation: Highly-foamed PE		4	100 500	13.0	21	(23) 1/0.59A	0.59	2.59	—	0.10TA/8/16 (95%) 0.10TA/9/16 (94%)	4.2	6.7	1.0	75	35.7	81
 V5-*CFW Jacket color: BLK Insulation: Foamed PE	V3-3CFW	3	100 500	13.0	22	(22) 1/0.65A	0.65	3.1	—	0.12A/5/24 (94%) 0.12A/6/24 (94%)	4.9	5.6	0.7	75	33.1	79
	V4-3CFW	4		14.6	28											
	V5-3CFW	5		16.2	34											
	V3-5CFW	3		18.4	36	(18) 1/1.05A	1.05	5.0	—	0.12A/7/24 (93%) 0.12A/9/24 (96%)	7.0	2.1	0.5	75	19.4	79
	V4-5CFW	4		20.4	47											
	V5-5CFW	5		22.4	58											
 V4-*C Jacket color: BLK Insulation: Solid PE	V3-1.5C	3	100 500	7.4	7.3	(31) 7/0.09A	0.27	1.55	—	0.10A/5/16 (94%)	2.6	42.3	3.3	75	—	66
	V4-1.5C	4		8.4	9.4											
	V5-1.5C	5		9.2	11											
	V3-3C	3		11.5	15	(25) 7/0.18A	0.54	3.1	—	0.14A/5/24 (97%)	4.4	10.6	1.1	75	43.2	66
	V4-3C	4		13.0	20											
	V5-3C	5		14.2	24											
	V3-5C	3		15.5	26	(22) 7/0.26A	0.78	4.8	—	0.12A/7/24 (93%)	6.0	5.1	1.2	75	29.2	66
	V4-5C	4		17.1	33											
	V5-5C	5		19.2	39											

Jacket PVC Dielectric strength : 1000V AC/min.

Note: Cable strippers (TS100 series) cannot be used for V-CHW, V-CFW, and V-1.5C.

V-CFB Series

- Low-loss multichannel coax for fixed installations.


V-CHW, V-CFW Series

- Mobile multichannel coax developed for digital video signals.

V-C Series

- Our long selling standard multichannel coax with flexible stranded center conductor.
- Ideal for component video signals.

Website



Technical Note

Many types of video coax. What're the differences and how select?


In brief, there are three of essential factors: 1) center conductor, 2) insulation, and 3) shield. Each factor has its advantage and disadvantage as described below:

- 1) Center Conductor: two types existing, "Solid" and "Stranded". Stranded conductor is more flexible and therefore the best choice for mobile and stage use.
- 2) Insulation: includes "Solid", "Foamed", and "Highly-foamed" types. Foamed and highly-foamed insulation would perform better attenuation, compared to the solid type thus they are often selected for hi-def video. However, since foamed and high-foamed insulation contain the air physically, they are weak to external pressure. You should pay attention to where and how the cables are installed.
- 3) Shield: we have "Braided" and "Braided with aluminum foil" type. Braided shields include single, double, or triple layers as well as bare copper or tinned copper. Braided with aluminum foil offers perfect screening, but they are not suitable for repeated bending and mobile applications due to the foil's lack of strength. In that case, it's better to choose "Braided".

Braided Shield



Double-Layer Braided Shield



Braided Shield with Aluminum Foil



What is Propagation Delay?

Propagation delay refers to the time required for a signal to be transmitted from one end of connection to another. In the case of cable transmission, this greatly depends on the materials and construction of the actual cable, and large differences in delay can cause transmission errors if they exceed the receiver delay tolerance.

The following table shows the differences in coaxial cable propagation delay time relative to the insulation type.

Propagation Delay Caused by Coaxial Cable Insulation (reference)

Insulation	Propagation Delay
Solid PE	5.0 ns/m
Foamed PE	4.2 ns/m
Highly-Foamed PE	3.7 ns/m

Typical Transmission Distance as per SMPTE Standard

SMPTE	ST 259				ST 344	ST 292	ST 424	ST 2082-1
Designation	SD-SDI				540 Mbps-SDI	HD-SDI	3G-SDI	12G-SDI
Video Format	NTSC	PAL	525/625 (4:3)	525/625 (16:9)	525/625 (4:3) p60	2K 1080i	2K 1080p	4K UHD
Bit Rate	143 Mb/s	177 Mb/s	270 Mb/s	360 Mb/s	540 Mb/s	1.5 Gb/s	3 Gb/s	12 Gb/s
Clock	143 MHz	177 MHz	270 MHz	360 MHz	540 MHz	1.485 GHz	2.97 GHz	11.88 GHz
Cable Loss @ 1/2 Clock	30 dB @ 72 MHz	30 dB @ 88 MHz	30 dB @ 135 MHz	30 dB @ 180 MHz	30 dB @ 270 MHz	20 dB @ 750 MHz	30 dB @ 1.5 GHz	40 dB @ 6 GHz
Model	m	m	m	m	m	m	m	m
L-2.5CFB	265	242	199	172	139	54	55	32
L-2.5CHD	314	287	237	206	168	66	69	43
L-2.5CHLT	314	287	237	206	168	66	69	43
L-3CFB	344	314	257	222	179	68	69	42
L-3.3CUHD	461	422	306	265	215	85	90	58
L-4CFB	422	314	315	272	220	84	86	52
L-4CHD	447	410	337	294	238	93	98	61
L-5CFB	563	513	420	364	294	112	114	68
L-4.5CHD	551	504	415	361	293	115	119	74
L-5CHD	614	562	464	403	327	128	133	82
L-6CHD	766	700	575	499	403	154	158	95
L-5.5CUHD	769	697	566	491	400	155	161	102
L-7CHD	902	824	678	589	476	184	188	116
L-8CHD	1034	937	769	681	545	208	212	131
L-8CUHD	1034	937	789	681	555	219	227	143
L-2.5CHWS	275	247	198	171	138	53	54	32
V4-2.5CHW	288	258	208	178	144	56	57	34
L-3CFW	319	288	230	197	158	60	60	35
L-4.5CHWS	447	405	322	280	225	87	90	50
L-5CFW	535	483	384	333	267	103	105	56
L-5.5CUHWS	625	566	447	389	312	119	121	71

*The above values are distances when cable loss reaches a typical attenuation specified by SMPTE standard at 1/2 clock frequency.

*These values are not equivalent to actual transmission distances, which depends on the equalized distance of receiver.

*Please check with vendor of receiver for equalized distance and reference cable to calculate actual transmission distance.


Cables

75Ω Coaxial Cables

75Ω Coax Cable Nominal Attenuation

Frequency Model		dB/100m											
		10MHz	30MHz	SMPTE 259M Composite NTSC 72.0MHz	ITU-R BT.601 Composite PAL 88.0MHz	SMPTE 259M Composite 4:2:2 135MHz	SMPTE 259M Composite 4:2:2 16×9 180MHz	SMPTE 344M 540Mb/s SDI 270MHz	SMPTE 292M HD-SDI 750MHz	1.3GHz	1.5GHz	3GHz	6GHz
75Ω	L-1.5C2VS	8.7	15.2	23.9	26.6	33.2	38.7	48.0	83.7	114.0	123.7	185.9	—
	V*-1.5C	8.7	15.1	23.6	26.2	32.7	37.9	46.8	80.5	108.6	117.5	173.4	—
	L-2.5CFB	4.8	7.6	11.3	12.4	15.1	17.4	21.5	37.0	50.0	54.1	80.2	121.8
	L-2.5CHD/L-2.5CHLT	4.1	6.5	9.5	10.4	12.6	14.5	17.8	30.2	40.0	43.1	62.0	91.7
	L-2.5CHWS	4.0	7.0	10.9	12.1	15.1	17.5	21.7	37.4	50.5	54.7	81.0	121.9
	V4-2.5CHW	3.8	6.7	10.4	11.6	14.4	16.8	20.7	35.7	48.3	52.3	77.4	115.9
	L-3C2V/L-3C2W	4.1	7.2	11.3	12.5	15.7	18.3	22.8	40.0	54.9	59.7	90.5	—
	L-3C2VS/V*-3C	4.5	7.9	12.4	13.8	17.2	20.0	24.8	43.3	58.9	63.9	96.0	—
	L-3CFB/V*-3CFB	3.7	5.9	8.7	9.5	11.7	13.5	16.7	29.1	39.6	43.0	64.5	93.5
	L-3CFW/V*-3CFW	3.4	5.9	9.4	10.4	13.0	15.2	18.9	33.1	45.4	49.4	74.8	114.2
	L-3.3CUHD	2.8	4.4	6.5	7.1	9.8	11.3	13.9	23.4	30.9	33.3	47.7	68.5
	L-4CFB	3.0	4.8	7.1	7.8	9.5	11.0	13.6	23.6	31.9	34.6	51.5	76.9
	V*-4CFB	3.0	4.9	7.2	7.9	9.7	11.2	13.9	24.3	33.2	36.0	54.3	83.8
	L-4CHD	2.9	4.6	6.7	7.3	8.9	10.2	12.6	21.3	28.4	30.6	44.3	65.1
	L-4.5CHD	2.3	3.7	5.4	6.0	7.2	8.3	10.2	17.4	23.2	25.1	36.5	53.6
	L-4.5CHWS	2.5	4.3	6.7	7.4	9.3	10.7	13.3	22.8	30.8	33.3	49.1	79.3
	L-5C2V/L-5C2W	2.5	4.5	7.1	7.9	9.9	11.5	14.4	25.7	35.7	38.9	60.0	94.8
	L-5C2VS/V*-5C	2.9	5.1	8.1	9.0	11.3	13.2	16.5	29.3	40.8	44.4	68.3	108.0
	L-5CFB/V*-5CFB	2.2	3.6	5.3	5.8	7.1	8.2	10.2	17.7	24.1	26.1	39.1	58.6
	L-5CFW/V*-5CFW	2.1	3.6	5.6	6.2	7.8	9.0	11.2	19.4	26.2	28.4	42.2	70.5
	L-5CHD	2.1	3.3	4.9	5.3	6.5	7.4	9.1	15.6	20.8	22.5	32.8	48.7
	L-5.5CUHD	1.5	2.5	3.9	4.3	5.3	6.1	7.5	12.9	17.1	18.5	26.8	39.1
	L-5.5CUHWS	1.7	3.1	4.8	5.3	6.7	7.7	9.6	16.7	22.7	24.6	36.7	56.0
	L-6CHD	1.7	2.7	3.9	4.3	5.2	6.0	7.4	12.9	17.5	19.0	28.3	42.0
	L-7CFB	1.6	2.5	3.8	4.2	5.1	6.0	7.5	13.4	18.8	20.5	32.0	53.6
	L-7CHD	1.4	2.3	3.3	3.6	4.4	5.1	6.3	10.9	14.7	15.9	23.5	34.4
	L-8CHD	1.2	2.0	2.9	3.2	3.9	4.4	5.5	9.6	13.0	14.1	21.1	30.4
	L-8CUHD	1.2	2.0	2.9	3.2	3.8	4.4	5.4	9.1	12.2	13.2	19.1	27.9
	LV-61S	3.8	6.6	10.4	11.5	14.4	16.8	20.9	36.8	50.4	54.8	83.1	—
	LV-77S	2.9	5.2	8.1	9.0	11.3	13.1	16.3	28.6	—	—	—	—

75Ω Low Loss Coax Cable Attenuation Chart

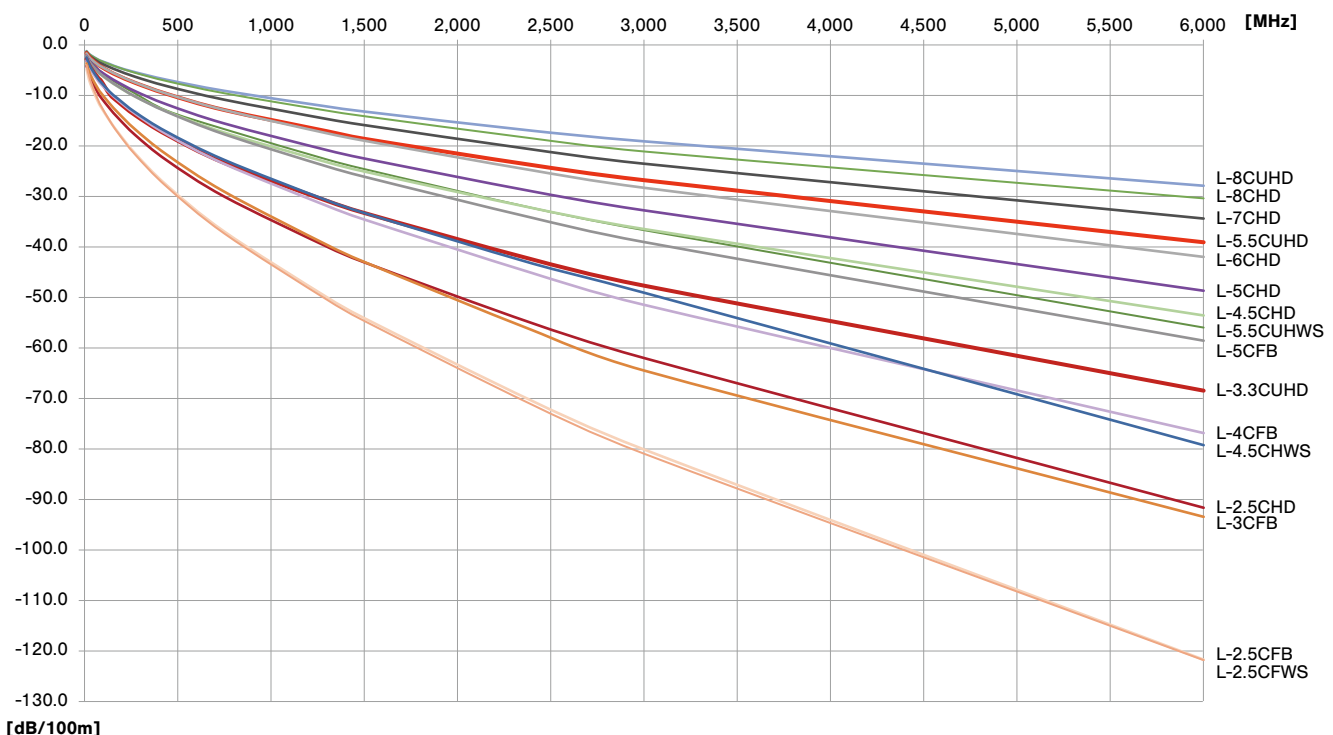

50Ω Coaxial Cables

Type	Model	Sales units	Nom. O.D.	Weight	Inner cond.		Insulation	Outer conductors		Inner cond. resist.	Outer cond. resist.	Static capacity	Characteristic impedance	Attenuation
					Comp.	O.D.		Foil	Braid comp. (coverage)					
		m	mm	kg/100m	(AWG) Q'ty/mm	mm	mm		mm/ends/ carriers	Ω/100m	Ω/100m	pF/m	Ω	dB/100m (10 MHz)
 L-3D2V Jacket: PVC Color: GRY	L-3D2V	100 200	5.3	4.5	(20) 7/0.32A	0.96	3.0	—	0.14TA/5/24 (98%)	3.3	1.2	100	50	4.5
	L-5D2V		7.3	7.9	(15) 1/1.40A	1.40	4.8	—	0.14TA/7/24 (95%)	1.2	0.8	100	50	2.5
 L-3D2W Jacket: PVC Color: GRY	L-3D2W	100 200	6.4	7.3	(20) 7/0.32A	0.96	3.0	—	0.14TA/5/24 (98%) 0.14TA/5/24 (96%)	3.3	0.6	100	50	4.5
	L-5D2W		8.0	11.0	(15) 1/1.40A	1.40	4.8	—	0.14TA/7/24 (95%) 0.14TA/7/24 (96%)	1.2	0.4	100	50	2.5
 Jacket: PVC Color: BLK	L-5DFB	100 200	7.6	8.5	(14) 1/1.80A	1.80	5.0	AL	0.14TA/6/24 (90%)	0.7	1.1	84	50	2.5
 Jacket: PE Color: BLK	L-5DFBW-PE	100 200	8.0	10.4	(14) 1/1.80A	1.80	5.0	AL	0.14TA/7/24 (93%) 0.14TA/8/24 (95%)	0.7	0.4	84	50	2.3

Insulation: polyethylene Dielectric strength: 1000V AC/min

L-3D2V, L-5D2V

- Tinned copper braided shield

L-3D2W, L-5D2W

- Tinned copper double braided shield

L-5DFB

- Low-loss foamed PE insulation
- Tinned copper braided shield with aluminum foil.

Note: Designed for fixed installation.**L-5DFBW-PE**

- Ideal for digital microwave communication systems
- PE jacket for fixed outdoor installation
- Low-loss foamed PE insulation
- Tinned copper double braided shield with aluminum foil

Note: Designed for fixed installation.

Website



■ 50Ω Coax Cable Nominal Attenuation

dB/100m

Frequency															
Model		10 MHz	130 MHz	470 MHz	600 MHz	710 MHz	714 MHz	800 MHz	1240 MHz	1260 MHz	1575 MHz	1700 MHz	2000 MHz	2400 MHz	2600 MHz
50Ω	L-3D2V/L-3D2W	4.5	17.3	35.4	40.7	44.9	45.1	48.2	62.6	63.2	72.5	76.0	84.1	94.4	99.3
	L-5D2V/L-5D2W	2.5	9.6	19.6	22.6	25.0	25.1	26.8	35.0	35.3	40.5	42.5	47.1	53.0	55.8
	L-5DFB	2.5	7.5	14.6	16.8	18.5	18.5	19.8	25.5	25.8	29.4	30.8	33.9	37.9	39.9
	L-5DFBW-PE	2.3	6.8	14.0	16.0	17.5	17.6	18.7	23.9	24.1	27.3	28.5	31.3	34.8	36.5


Panels and Patchbays

75Ω Video Patchbays

Overview

Video patchbays, as a backup or a final means for safety in a routing system, often face high demand on stable and constant patching connections and contacts. Over the decades, Canare has focused on these essentials and has developed the solutions for the latest video format such as 4K/8K.

The following table will help finding the right panels for you.

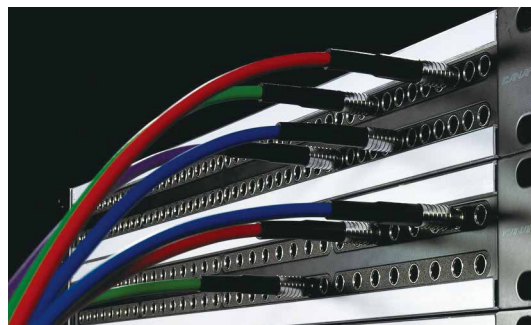

■ Product Finder





Page	78	79	80	81	82
Applications	4K/8K 12G-SDI 6G-SDI	4K/8K 12G-SDI 6G-SDI	2K/4K 3G-SDI HD-SDI	2K/4K 3G-SDI HD-SDI	2K/4K 3G-SDI HD-SDI
Patchbays					
	32MCKA-ST*	32SVK-ST	48MC*	32MD-ST*	2xDV*
Channels	32	32	48	32	20, 24, 26
Rack Unit	1RU, 1.5RU, 2RU	1RU, 1.5RU	1RU	1RU, 2RU, 4RU	1RU, 2RU
Jacks					
	MCVJKA-STW/S	SVJK-S/L	MCVJ-W/S	MDVJ-STW/S	DVJB-W/S
Self Terminating	Yes	No	Yes	Yes	Yes
Front	Canare Micro	Canare Single	Canare Micro	Mini-WECO	WECO
Rear	BNC	BNC	DIN 1.0/2.3	BNC	BNC
NET Weight (approx.)	1RU : 2.8 kg 1.5RU : 3.5 kg 2RU : 3.7 kg	1RU : 1.7 kg 1.5RU : 2.4 kg	2.3 kg	1RU : 2.9 kg 2RU : 3.9 kg 4RU : 8.0 kg	20DV : 2.4 kg (1RU) 24DV : 2.7 kg (1RU) 26DV : 2.8 kg (1RU)
SMPTE	ST 2081 -x ST 2082 -x		ST 292 ST 424 ST 425 -x		
Features	Mechanical switch with Dust-proof Shutter	MUSA style Hassle-free patching	Mechanical switch with Dust-proof Shutter	100% sealed rotary switch	100% sealed rotary switch
Patch Cord / U-Link					
	MCVPC**	SVP-ULK SVPC**	MCVPC**	MVPC**	VPC**

WECO : Western Electric Company (W.E. standard)

Technical Note

Dual Video Jack Normalling Chart

There are two types of dual video jacks: Normal Through and Straight Through. In Canare, these are identified at the end of the model name, W means the former and S means the latter. The following chart explains the differences between two types.

W type (Normal Through)				S type (Straight Through)			
Video Port:		BNC Port:		Video Port:		BNC Port:	
No Patch		Signal thru as Arrowed	Signal routes between top and bottom BNC without the use of Video plugs.	No Patch		Both Signal Terminated	Two independent single jacks in a dual housing.
Patch Upper		Lower Terminated	Inserting a Video Patch Cord into front "upper" port automatically terminates signal path into the lower 75Ω load.	Patch Upper		Lower Terminated	Inserting a Video Patch Cord into front "upper" port automatically terminates signal path into the lower 75Ω load.
Patch Lower		Upper Terminated	Inserting a Video Patch Cord into front "lower" port automatically terminates signal path into the upper 75Ω load.	Patch Lower		Upper Terminated	Inserting a Video Patch Cord into front "lower" port automatically terminates signal path into the upper 75Ω load.
Patch Both		Signal thru as Arrowed	Inserting Video Patch Cords into both front ports inputs and/or outputs signal.	Patch Both		Signal thru as Arrowed	Inserting Video Patch Cords into both front ports inputs and/or outputs signal.

75Ω Staggered Video Patchbays

The next-generation 12G-ready video patchbays with newly developed staggered dual video jacks.

Patchbays

12G-SDI

Model	Panel Size	Loaded Video Jacks
32MCKA-ST New	1RU	32 × MCVJKA-STW
32MCKA-STs New	1RU	32 × MCVJKA-STs
32MCKA-ST-1.5U New	1.5RU	32 × MCVJKA-STW
32MCKA-STs-1.5U New	1.5RU	32 × MCVJKA-STs
32MCKA-ST-2U New	2RU	32 × MCVJKA-STW
32MCKA-STs-2U New	2RU	32 × MCVJKA-STs

Standard panel color: Black. Available in 5 colors. see page 83.

Key Features and Benefits

- 12G-SDI: SMPTE ST 2082-1 fully compliant
- Refined the entire performance for 12G applications
- Lightweight video jacks with simple structure
- Dust-proof shutter
- New 1.5RU and 2RU panels: Finger removal and wider designation strip

Website



MCVPC**
(See page 87)



Note: Be sure to use with Canare Micro Video Patch Cords.

Dual Video Jacks

Model	Description	Rear Jacks
MCVJKA-STW New	Normal through, Staggered rear jacks	BNC
MCVJKA-STs New	Straight through, Staggered rear jacks	BNC

Website



Micro Video Plug

Model	Suitable Cable	Boot	Die Set
MCVP-C25HW	L-2.5CHWS	—	TCD-D253F

*Standard package: 20 pcs


*The plug is specifically designed for MCVJ and MCVJKA jacks.

Website






Accessories

Model	Description
MCVPC**	Canare Micro patch cords (see page 87)
BCJ-MCVP New	BNC (female) to Micro Video plug conversion adapter (10 pcs)
BET-BNC New	BNC extraction tool (see page 51)
PH50B	Patch cord holder for MCVPC**
MCVJ-DC	Dust cap for MCVJKA (black, 100 pcs)
MJ2-M32CKA-U*** New	Unloaded panels (see page 85)





Normal Through

Patch Through
(Long BNC port)Patch Through
(Short BNC port)

Isolation

Return Loss for MCVJKA-STW

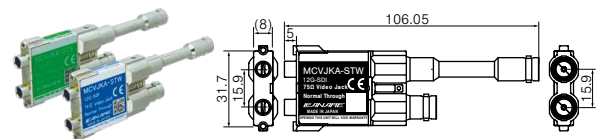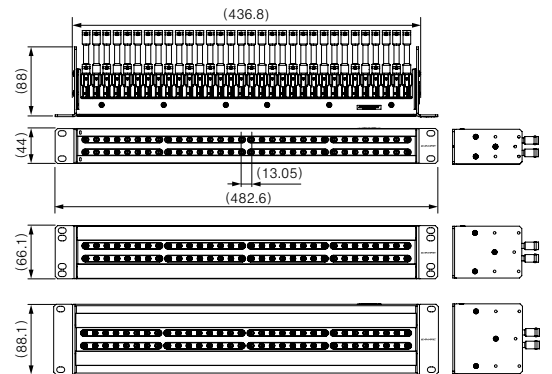

MCVP-C25HW



BCJ-MCVP

Return Loss & Isolation

Model	MCVJKA-STW	MCVJKA-STs
RL	BNC-BNC: Normal Through	—
	BNC-Video: Patch Through	15 dB or greater @ 1.5 GHz
	BNC-Self Termination	10 dB or greater @ 3 GHz
		7 dB or greater @ 6 GHz
Isolation		45 dB or greater @ 6 GHz

Panels and Patchbays

75Ω Video Patchbays

75Ω Single Video Patchbay

The true 12G-SDI video patching system: Canare exclusive 12G capable single jacks, convenient looping plug, flexible patch cords, and 75Ω termination video plug. This MUSA style solution exceeds 4K/8K UHD requirements. 1RU, 1.5RU, or 2RU panel options available.

■ Patchbay **12G-SDI**

Model	Panel Size	Loaded Video Jacks
32SVK-ST	1RU	32 × SVJK-L 32 × SVJK-S
32SVK-ST-1.5U	1.5RU	32 × SVJK-L 32 × SVJK-S

Standard panel color: Black. Available in 9 colors. see page 83.

Key Features and Benefits





- 12G-SDI: SMPTE ST 2082-1 compliant
- Return loss performance: 15dB@12GHz
- 40% lighter than 32MCKA-ST/32MD-ST
- 32 channels of I/O into 1RU or 1.5RU
- Canare original hassle-free patching design
- Staggered BNC rear jacks
- Can be recessed 25 mm
- Included a sheet of channel designator for easy identification

Note : Be sure to use with Canare Single Video Patch Cords.

Website



SVPC**
(See page 87)

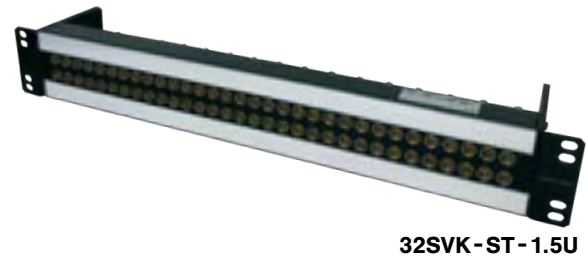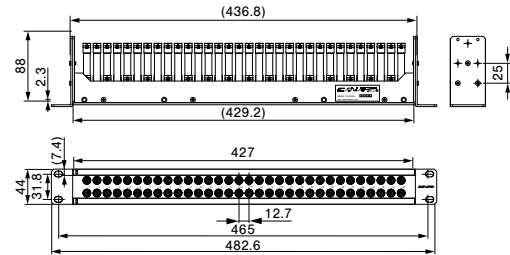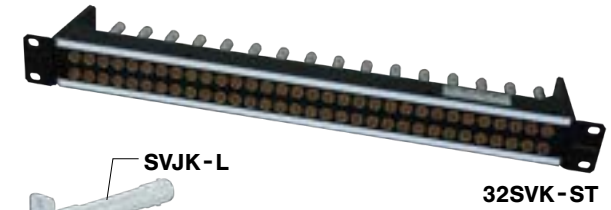

■ Single Video Jacks

Model	Description	Rear Jack
SVJK-L	Long type	BNC
SVJK-S	Short type	BNC

*Adapter plates: SVJK-AP should be used for loading the jacks. Call for the details.

Website



■ Single Video Plug

Model	Suitable Cable	Boot	Die Set
SVP-C25HW	L-2.5CHWS	CB02	TCD-D253F

*Standard package : 20 pcs

Website



■ U-link and Termination Plugs

Model	Description
SVP-ULK	U-link/Looping plug
SVP-TK	Termination plug (standard package 20 pcs)

Website







■ Accessories

Model	Description
SVPC**	Canare SV patch cords (see page 87)
BET-BNC	BNC extraction tool (see page 51)
PH50A	Patch cord holder for SVPC**
SVJK-DC	Dust cap for SVJK (black, 10 pcs)
MJ2-M32-U-***	Unloaded panels (see page 85)

■ Return Loss

Model	SVJK-S, SVJK-L	SVP-TK	SVP-ULK
@ 3 GHz	26 dB or greater	25 dB or greater	20 dB or greater
@ 6 GHz	20 dB or greater	20 dB or greater	15 dB or greater
@ 12 GHz	15 dB or greater	10 dB or greater	10 dB or greater



75Ω Micro Video Patchbays

Our unique, thinnest and lightest video jacks realize ultimate space efficiency.

■ Patchbays

Model	Panel Size	Loaded Video Jacks
48MC	1RU	48 × MCVJ-W
48MCS	1RU	48 × MCVJ-S

Standard panel color : Black. Available in 5 colors. Contact for more details.

Website



Key Features and Benefits

- High density 48 channels of I/O into 1RU design.
- Video jack weights 35 g and is half of our conventional one.
- Space and weight saving; beneficial to O.B. vans
- DIN 1.0/2.3 rear jacks.
- Dust-proof shutter
- Included a sheet of channel designator for easy identification.
- Can be recessed 25 mm.
- 3G-SDI : SMPTE ST 424 compliant

Note : Be sure to use with Canare Micro Video Patch Cords.



■ Dual Video Jacks

Model	Description	Rear Jacks
MCVJ-W	Normal through	DIN 1.0/2.3
MCVJ-S	Straight through	DIN 1.0/2.3

Website



■ Micro Video Plug

Model	Suitable Cable	Boot	Die Set
MCVP-C25HW	L-2.5CHWS	—	TCD-D253F

*Standard package : 20 pcs

*The plug is specifically designed for MCVJ and MCVJKA jacks.

Website





■ Accessories

Model	Description
MCVPC**	Canare Micro patch cords (see page 87)
BCJ-MCVP New	BNC (female) to Micro Video plug conversion adapter (10 pcs)
BET-DIN	Extraction tool for DCP-C series (see page 51)
BET-D/H	
PH50B	Patch cord holder for MCVPC**
MCVJ-DC	Dust cap for MCVJ (black, 100 pcs)



48MC

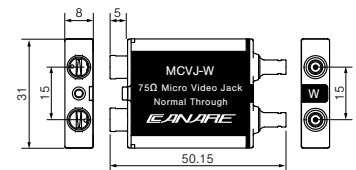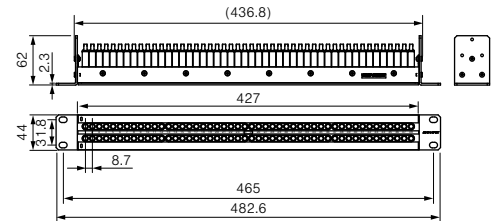


MCVP-C25HW




BCJ-MCVP

■ Return Loss & Isolation


Model	MCVJ-W	MCVJ-S
RL	DIN-DIN: Normal Through	20 dB or greater @ 3 GHz
	DIN-Video: Patch Through	20 dB or greater @ 3 GHz
	DIN-Self Termination	10 dB or greater @ 3 GHz
Isolation		45 dB or greater @ 3 GHz



Normal Through



Patch Through



Isolation

Return Loss for MCVJ-W

Panels and Patchbays

75Ω Video Patchbays

75Ω Staggered Mid-size Video Patchbays

3G-ready mid-size video jacks allow for more efficient use of rack space.

■ Patchbays

Model	Panel Size	Loaded Video Jacks
32MD-ST	1RU	32 × MDVJ-STW
32MD-STs	1RU	32 × MDVJ-STs
32MD-ST-2U	2RU	32 × MDVJ-STW
32MD-STs-2U	2RU	32 × MDVJ-STs
32MD-ST-4U	4RU	96 × MDVJ-STW
32MD-STs-4U	4RU	96 × MDVJ-STs

Standard panel color: Black. Available in 9 colors, see page 83.

Key Features and Benefits

- 32 channels of I/O into 1 or 2RU, 96 channels of I/O into 4RU.
- Rotary Switch Technology with dual-contact construction.
- Can be recessed 25 mm (except 4RU type).
- Wide designation strip (2RU, 4RU type).
- Lightweight aluminum alloy video jacks.

Note: Be sure to use with Mini-WECO Video Patch Cords.

Website



MVPC**
(See page 87)

■ Dual Video Jacks

Model	Description	Rear Jacks
MDVJ-STW	Normal through, Staggered rear jacks	BNC
MDVJ-STs	Straight through, Staggered rear jacks	BNC

Website



■ Mini-WECO Video Plugs

Model	Suitable Cable	Boot	Die Set
MVP-C25HW	L-2.5CHWS	CB25	TCD-D253F
MVP-C4	LV-61S, RG-59B/U, Belden 8241, 8279, 88241	CB25	TCD-451CA TCD-4CA

*Standard package: 20 pcs


Website



■ Accessories

Model	Description
MVPC**	Mini WECO patch cords (see page 87)
MVPC**-HW	
BCJ-MVP	BNC (female) to Mini-WECO plug conversion adapter (10 pcs)
BET-BNC	BNC extraction tool (see page 51)
PH50A	Patch cord holder for MVPC**
MVJ-DC	Dust cap for MDVJ (color: black 40 pcs)
MJ2-M32-U-***	Unloaded panels (see page 85)
VJ2-M32-4U	


*BCJ-MVP is recommended to use with Slim BNC plug (see page 32).

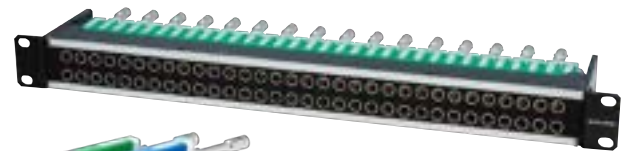

32MD-STs




32MD-ST-4U

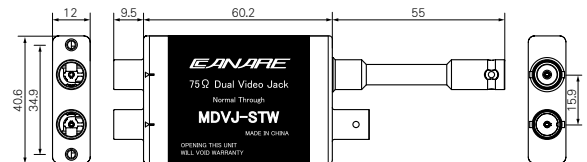


MVP-C4

■ Return Loss & Isolation


Model	MDVJ-STW	MDVJ-STs
BNC-BNC: Normal Through		—
RL	BNC-Video: Patch Through	26 dB or greater @ 750 MHz 20 dB or greater @ 2.4 GHz 10 dB or greater @ 3 GHz
	BNC-Self Termination	26 dB or greater @ 750 MHz 20 dB or greater @ 1.5 GHz 10 dB or greater @ 3 GHz
	Isolation	35 dB or greater @ 1.5 GHz 20 dB or greater @ 3.0 GHz




Normal Through



Patch Through
(Long BNC port)



Patch Through
(Short BNC port)



Isolation

Return loss for MDVJ-STW

75Ω Video Patchbays

3G-ready HD-SDI video patchbays featuring Canare's uniquely-developed rotary switches.

Patchbays

Model	Panel Size	Loaded Video Jacks
20DV	1RU	20 × DVJB-W
24DV		24 × DVJB-W
26DV		26 × DVJB-W
20DVS	1RU	20 × DVJB-S
24DVS		24 × DVJB-S
26DVS		26 × DVJB-S
20DV-2U	2RU	20 × DVJB-W
24DV-2U		24 × DVJB-W
26DV-2U		26 × DVJB-W
20DVS-2U	2RU	20 × DVJB-S
24DVS-2U		24 × DVJB-S
26DVS-2U		26 × DVJB-S

Standard panel color: Black. Available in 9 colors. see page 84.

Key Features and Benefits

- Rotary Switch Technology with dual-contact construction.
- Can be recessed 25 mm.
- Wide designation strip (2RU type).
- Lightweight aluminum alloy video jacks.

Note: Be sure to use with WECO Video Patch Cords.

Website



VPC** - WC
(See page 87)

Dual Video Jacks

Model	Description	Rear Jacks
DVJB-W	Normal through	BNC
DVJB-S	Straight through	BNC

Website



VWP-C4A

WECO Plugs

Model	Suitable Cable	Boot	Die Set
VWP-C25HW	L-2.5CHWS	CB04	TCD-D253F
VWP-C4A	LV-61S, RG-59B/U, Belden 8241, 8279, 88241	CB04	TCD-451CA TCD-4CA

*Standard package: 20 pcs

Website




Accessories


Model	Description
VPC** - WC	WECO patch cords (see page 87)
VPC** - HW - WC	
BCJ - VWP	BNC (female) to WECO plug conversion adapter
BET-BNC New	BNC extraction tool (see page 51)
PH50A	Patch cord holder for VPC**
VJ-DC	Duct cap for DVJB (black, 40 pcs)
VJ2-V**-*U-***	Unloaded panels (see page 85)

Return Loss & Isolation


Model	DVJB-W	DVJB-S
RL	BNC-BNC: Normal Through	—
	BNC-Video: Patch Through	26 dB or greater @ 750 MHz 20 dB or greater @ 2.4 GHz 10 dB or greater @ 3 GHz
	BNC-Self Termination	26 dB or greater @ 750 MHz 20 dB or greater @ 1.5 GHz 10 dB or greater @ 3 GHz
Isolation		35 dB or greater @ 1.5 GHz 20 dB or greater @ 3.0 GHz



Normal Through



Patch Through



Isolation

Return loss for DVJB-W

Panels and Patchbays

75Ω Video Patchbays

Ordering Information

32 Channels 12G/3G Video Patchbays

32 **MCKA** - ST **S** - 2 - 2U

Jack Type **MCKA** 12G Dual

Signal Path **Blank** Normal Through
S Straight Through

Panel Color

Blank	Black
2	Red
4	Yellow
5	Green
6	Blue
7	Purple

Rack Unit

Blank	1RU
1.5U	1.5RU
2U	2RU

32 **MD** - ST **S** - 8 - 2U

Jack Type **SVK** 12G Single
MD 3G Dual

Signal Path **Blank** Normal Through
S Straight Through

Panel Color

Blank	Black
1	Brown
2	Red
3	Orange
4	Yellow
5	Green
6	Blue
7	Purple
8	Gray
9	White

Rack Unit


Blank	1RU
1.5U	1.5RU
2U	2RU
4U	4RU

* 1.5RU and 2RU are available for SVK and MD.
** for 4RU, MD only.


* MD only.

* for 4RU, black only.


32MD-ST

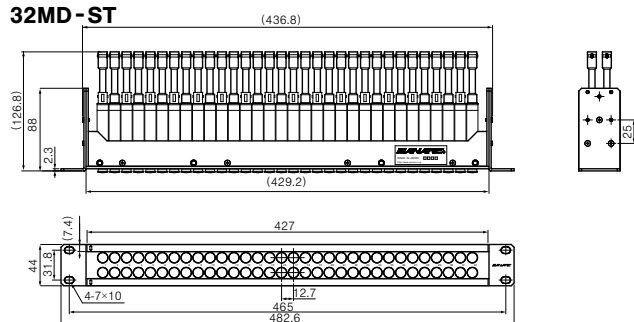


32SVK-ST-1.5U

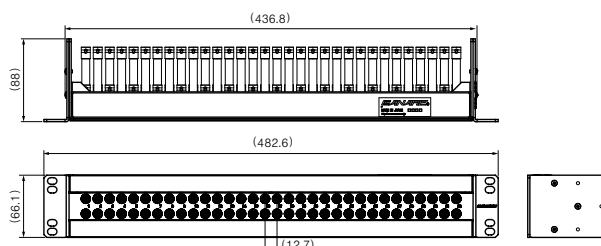

32MD-ST-2U

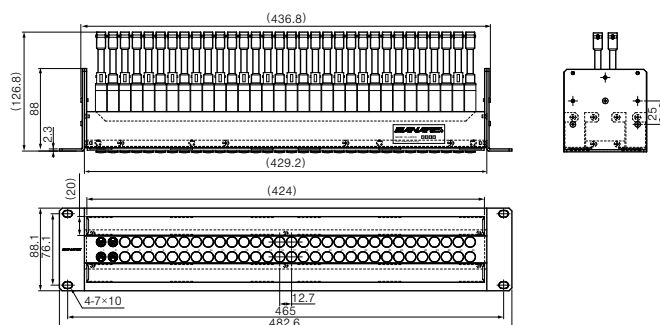

32MD-ST-4U

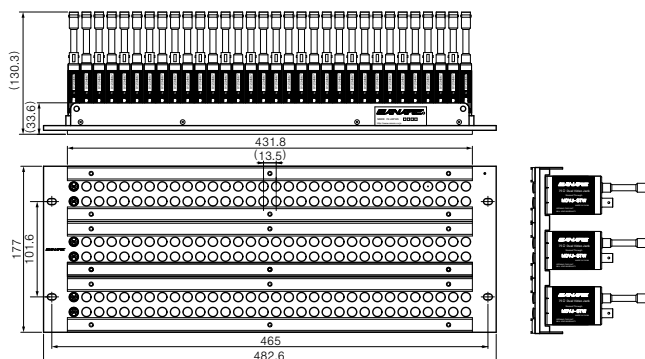

Ordering Information

WECO Video Patchbays

24 DV S - 8 - 2U

Number of Channels

20	20 Channels
24	24 Channels
26	26 Channels

Signal Path

Blank	Normal Through
S	Straight Through


Panel Color

Blank	Black
1	Brown
2	Red
3	Orange
4	Yellow
5	Green
6	Blue
7	Purple
8	Gray
9	White


Rack Unit

Blank	1RU
2U	2RU


20DV

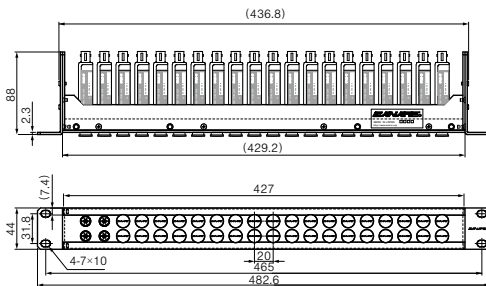

24DV

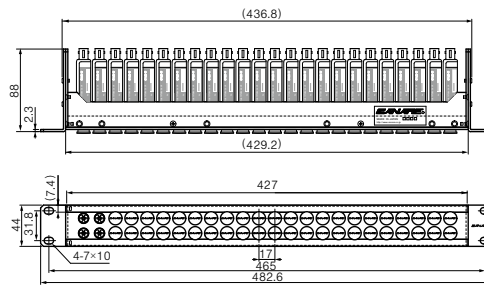

26DV-2U

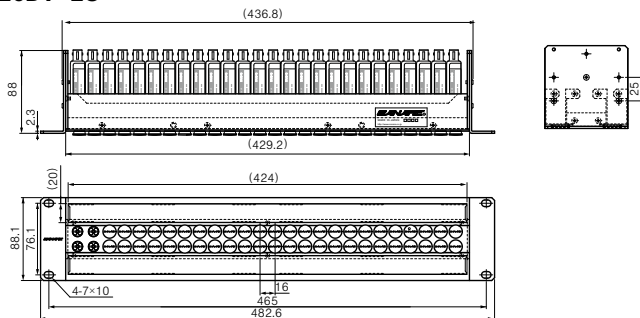

Designation Strip Dimensions

- 1RU : 426 mm × 6.2 mm*
- 1.5RU : 426.5 mm × 16.7 mm
- 2RU : 420 mm × 18.4mm**
- 4RU : 431.8 mm × 13.2 mm

* 32MCKA-ST*- 426mm × 8.5mm
 ** 32MCKA-ST*-2U 426.5mm × 16.7mm

Note :

- 1) 4RU type is available in black color only.
- 2) 4RU type can not be recessed.

Panels and Patchbays

Unloaded Video Jack Panels

Unloaded Video Jack Panels

Model	Panel Size	Description
VJ2-V20-1U-***	1RU	20 ch (40 holes), for DVJB
VJ2-V20-2U-***	2RU	20 ch (40 holes), for DVJB
VJ2-V24-1U-***	1RU	24 ch (48 holes), for DVJB
VJ2-V24-2U-***	2RU	24 ch (48 holes), for DVJB
VJ2-V26-1U-***	1RU	26 ch (52 holes), for DVJB
VJ2-V26-2U-***	2RU	26 ch (52 holes), for DVJB
MJ2-M32-1U-***	1RU	32 ch (64 holes), for MDVJ and SVJK
MJ2-M32-1.5U-*** New	1.5RU	32 ch (64 holes), for MDVJ and SVJK
MJ2-M32-2U-***	2RU	32 ch (64 holes), for MDVJ and SVJK
VJ2-M32-4U	4RU	96 ch (3 × 32 ch, 192 holes), for MDVJ, Black
MJ2-M32CKA-1U-*** New	1RU	32 ch (32 slots), for MCVJKA
MJ2-M32CKA-1.5U-*** New	1.5RU	32 ch (32 slots), for MCVJKA
MJ2-M32CKA-2U-*** New	2RU	32 ch (32 slots), for MCVJKA

***: Please refer to the ordering information below.

<Ordering Information>

Mid-Size 3G/12G Video Patchbays


* for 4RU, one model only: VJ2-M32-4U

MJ2 - M32 - 1U - BLK


Rack Unit	Panel Color
1U 1RU	BLK Black
1.5U 1.5RU	BRN Brown
2U 2RU	RED Red
	ORG Orange
	YEL Yellow
	GRN Green
	BLU Blue
	PPL Purple
	GRY Gray
	WHT White

MJ2 - M32 CKA - 1.5U - BLK


Jack Type	Rack Unit	Panel Color
CKA MCVJKA	1U 1RU	BLK Black
	1.5U 1.5RU	RED Red
	2U 2RU	YEL Yellow
		GRN Green
		BLU Blue
		PPL Purple

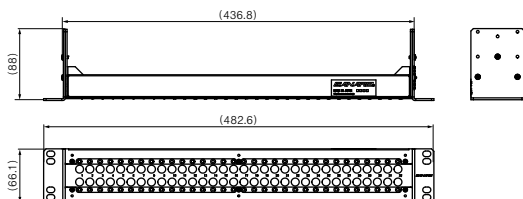

MJ2-M32-1.5U-BLK

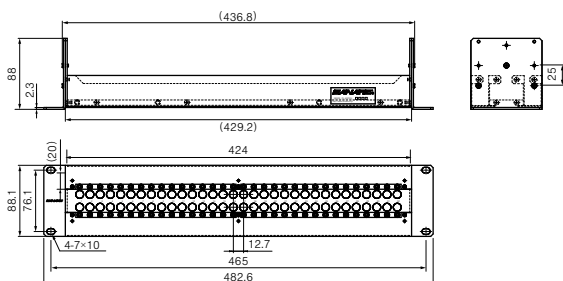

MJ2-M32-2U-BLK

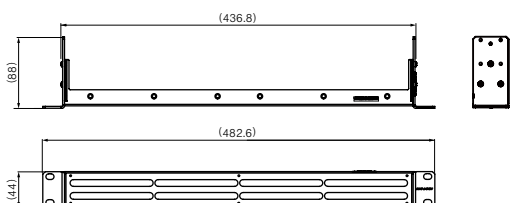

MJ2-M32CKA-1U-BLK

Website



MJ2-M32CKA

WECO Video Patchbays

VJ2 - V 24 - 1U - BLK

Channels	Rack Unit	Panel Color
20 20 Channels	1U 1RU	BLK Black
24 24 Channels	2U 2RU	BRN Brown
26 26 Channels		RED Red
		ORG Orange
		YEL Yellow
		GRN Green
		BLU Blue
		PPL Purple
		GRY Gray
		WHT White

Designation Strip Dimensions

1RU : 426 mm × 6.2 mm*

1.5RU : 426.5 mm × 16.7 mm

2RU : 420 mm × 18.4 mm**


4RU : 431.8 mm × 13.2 mm

* MJ2-M32CKA-1U-BLK 426mm × 8.5mm


** MJ2-M32CKA-2U-BLK 426.5mm × 16.7mm

Note :

- 1) 4RU type is available in black color only.
- 2) 4RU type can not be recessed.

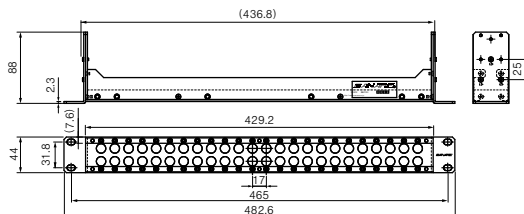

VJ2-V24-1U-BLK

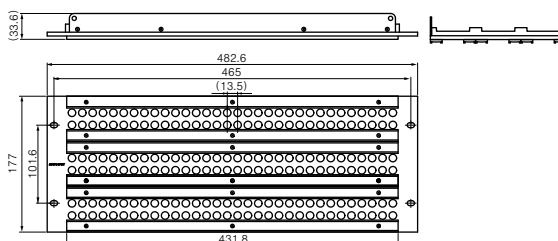

VJ2-M32-4U

RS422 Patchbays

Website



IP Connectivity Products

Technical Trend

Fiber-Optic Systems

Connectors

Cables

Panels & Patchbays




Multichannel Systems

Cable Assemblies

Model	Panel Size	Connectors	
		Front Panel	Rear Panel
RS-422-1U-16	1RU	Bantam	D sub 9P(F) × 16
RS-422-1U-24	1RU	Bantam	D sub 9P(F) × 24
RS-422-2U-32	2RU	Bantam	D sub 9P(F) × 32
RS-422-2U-48	2RU	Bantam	D sub 9P(F) × 48

- The RS422 serial signal used for VTR remote applications can now be switched with Bantam patchbay ease.
- D sub screws are M2.6

* Listed above items are other manufacturer's products.

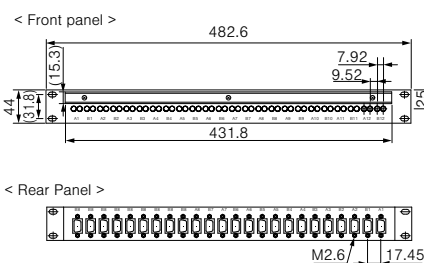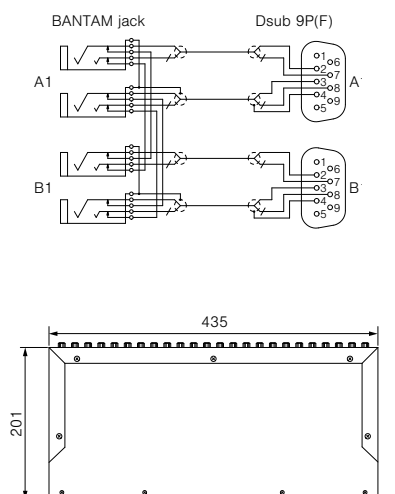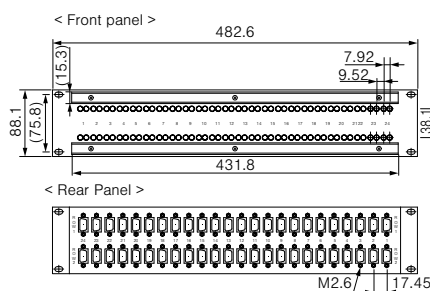**RS-422-2U-48****RS-422-1U-24****RS-422-2U-48**


Panels and Patchbays

Video Patch Cords

Video Patch Cords

Canare Micro

For 32MCKA-ST or 48MC

Type	Model	Length (m)
	MCVPC003	0.3
	MCVPC005	0.5
	MCVPC01	1




Canare Micro



Canare Single

For 32SVK

Type	Model	Length (m)
	SVPC003	0.3
	SVPC005	0.5
	SVPC01	1



Canare Single



Mini-WECO

For 32MD-ST and Mini-WECO patchbays

Type	Model	Length (m)
	MVPC003	0.3
	MVPC005	0.5
	MVPC01	1
	MVPC003-HW	0.3
	MVPC005-HW	0.5
	MVPC01-HW	1




Mini-WECO



WECO

For 2*DV and WECO patchbays

Type	Model	Length (m)
	VPC003-WC	0.3
	VPC005-WC	0.5
	VPC01-WC	1
	VPC003-HW-WC	0.3
	VPC005-HW-WC	0.5
	VPC01-HW-WC	1



WECO



Canare Micro Conversion

Type	Model	Length (m)
to Mini-WECO	MCVPC003-MVP	0.3
	MCVPC005-MVP	0.5
	MCVPC01-MVP	1
to WECO	MCVPC003-VWP	0.3
	MCVPC005-VWP	0.5
	MCVPC01-VWP	1
to BNC (F)	MCVPC002-BJ	0.2



Mini-WECO Conversion

Type	Model	Length (m)
to BNC (F)	MVPC002-BJ	0.2
to BNC (M)	MVPC02A-BP	2
	MVPC05A-BP	5



Pre-Loaded A/V Connector Panels

Key Features and Benefits

- BNC and XLR types are available.
- Clear plastic cover, full screen desi-strip
- Variety of panel options
- Most popular panel holes XLR F77 and Neutrik D available

Website



IP Connectivity Products

Technical Trend

Fiber-Optic Systems

Connectors



Cables

Panels & Patchbays

Multichannel Systems

Cable Assemblies

XLR Connector Panels

Type	Panel Size	Model	Loaded Connector	Panel P/N	Dimensions (mm)
 161U-X12F	1RU	161U-X1F	XLR3-31-F77 (16 pcs)	1U-AS1	44 × 482.6 × 39.7
		161U-X2F	XLR3-32-F77 (16 pcs)		44 × 482.6 × 26.6
		161U-X12F	XLR3-31-F77 (8 pcs, Left) XLR3-32-F77 (8 pcs, Right)		44 × 482.6 × 39.7
		161U-B1	NC3FD-LX-B (16 pcs)	1U-AS1D	44 × 482.6 × 31.3
		161U-B2	NC3MD-LX-B (16 pcs)		44 × 482.6 × 23.6
 162U-X21	2RU	162U-X21	XJ3M-P3FA (16 pcs, Upper Row) XJ3F-P3MA (16 pcs, Lower Row)	2U-AS7	88.1 × 482.6 × 217
		162U-X22	XJ3M-P3FA (32 pcs, 2 rows)		

BNC Connector Panels


Type	Panel Size	Model	Loaded Connector	Panel P/N	Dimensions (mm)
 161U-JRUK	1RU	161U-JRUK	BCJ-JRUK (16 pcs)	1U-AS1	44 × 482.6 × 31.4
	2RU	162U-JRUK	BCJ-JRUK (32 pcs, 2 rows)	2U-AS7	88.1 × 482.6 × 217

XLR3 Panel Mount Adapters


Model	Description		Flange Type
	Front	Rear	
XJ3M-P3FA	XLR 3pin (M)	XLR 3pin (F)	ITT XLR-F77
XJ3M-P3MA	XLR 3pin (M)	XLR 3pin (M)	
XJ3F-P3FA	XLR 3pin (F)	XLR 3pin (F)	
XJ3F-P3MA	XLR 3pin (F)	XLR 3pin (M)	

- XJ3 series are XLR3 full compatible.
- XLR jack to jack extremely reduce installation hours.


Website




XJ3F-P3MA




XJ3M-P3MA




XJ3M-P3FA



XJ3M-P3MA



XJ3F-P3FA



XJ3F-P3MA

Blank Panels

Model	Description
BP-DXF (20 pcs)	Snap-on blank panels for both ITT XLR-F77/Neutrik D holes
BP-XF (10 pcs)	Blank panels for ITT XLR-F77 hole with screws
BP-D (10 pcs)	Blank panels for Neutrik D hole with screws

BP-DXF


- Easy and quick snap-on mounting without any tools
- Can be used for both ITT XLR-F77 and Neutrik D holes

Note: Panel thickness range: t 1.2 to t 2.3 mm

Website



BP-DXF















BP-XF

Panels and Patchbays

Connector Panels

Unloaded A/V Connector Panels

Panel Type	AS1 (D)	AS3 (D)	AS5 (D)	AS7 (D)
Description	Flat panel	Flat panel w/cable tie bar	Variable panel w/cable tie bar short type	Variable panel w/cable tie bar Long type
1RU 16 holes × 1 row				
Model	1U-AS1 (D)	1U-AS3 (D)	1U-AS5 (D)	1U-AS7 (D)
Depth (mm)	—	64.8	100	217
2RU 16 holes × 2 rows				
Model	2U-AS1 (D)	2U-AS3 (D)	2U-AS5 (D)	2U-AS7 (D)
Depth (mm)	—	64.8	100	217
3RU 16 holes × 3 rows				
Model	3U-AS1 (D)	3U-AS3 (D)	3U-AS5 (D)	3U-AS7 (D)
Depth (mm)	—	64.8	100	217

Variable panel can be recessed 25 mm.

Ordering Information

Panel Height,

Number of holes and Rows

1U	1RU, 16 holes, 1row
2U	2RU, 32 holes, 2rows
3U	3RU, 48 holes, 3rows

1U - AS3 D — Hole Type

Blank ITT XLR-F77 Type

D Neutrik D Type

Panel Type

AS1	Flat panel
AS3	Flat panel w/ cable tie bar
AS5	Variable panel w/ cable tie bar - short depth
AS7	Variable panel w/ cable tie bar - long depth

Website




Note: Depending on their length, some connectors can not be mounted on the panel with a cable tie bar installed.


Related Products

Model	Description
M-MA1U02A New	1RU mounting brackets for a Variable panel, 2 pcs. (left and right)
M-MA2U02	2RU mounting brackets for a Variable panel, 2 pcs. (left and right)
M-MA3U02	3RU mounting brackets for a Variable panel, 2 pcs. (left and right)
DS10-AS4	Designation strip for Canare A/V connector panels, 2 pcs.


Examples of Custom-Made Connector Panels



1U-AS3 + XLR3-31-F77 × 16



2U-AS7 + XLR3-32-F77 × 16
XLR3-31-F77 × 16



2U-AS7 (box type)
Connectors can be mounted on the both side.

Connectors Canare Flush-mount BNC, F, RCA and XLR (ITT XLR-F77 or Neutrik D type) are available.


Options

- A) Rear Panel A connector panel can be mounted on the rear.
- B) Box Type A connector panel, top plate and bottom plate can be mounted on the rear.
- C) Recessed Variable panel can be recessed 25 mm by changing the screw positions of the mounting brackets and can be recessed either 50 mm or 75 mm by changing the mounting brackets to M-MA1U02A or M-MA*U02.

Options	AS1 (D)	AS3 (D)	AS5 (D)	AS7 (D)
A) Rear Panel	N/A	N/A	Available	Available
B) Box Type	N/A	N/A	N/A	Available
C) Recessed	N/A	N/A	Available	Available

Audio Patchbays

The gold alloy cross bar contact, which features a low faulty contact rate, is used for the jacks.

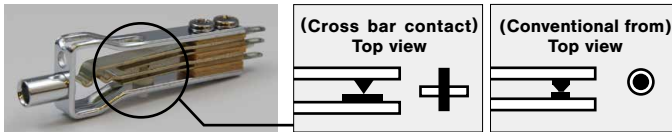

- 481U patchbay can be recessed 25 mm by changing the screw positions on the mounting brackets.

Model	Description	Connector
481U - 820AQ	Bantam Patchbay	820AQ × 96

Model	Description	Connector
48 - 12A/820AQ/EIA	Bantam Patchbay	820AQ × 96
32 - 12A/620A/EIA	Skini Patchbay	620A × 64
612A/320A/EIA WHILE STOCKS LAST	Maxi Patchbay	320A × 52

* Listed above items are other manufacturer's products.




Bantam patch panel 481U - 820AQ




Bantam patch panel 48 - 12A/820AQ/EIA




BC * M
(See page 102 for patch cords.)

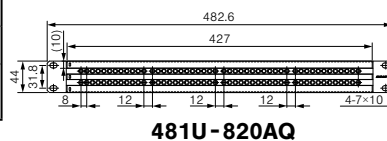


481U - 820AQ

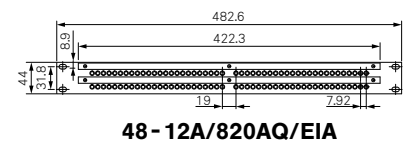

48 - 12A/820AQ/EIA



32 - 12A/620A/EIA






612A/320A/EIA

Audio Patchbays Related Products

Model	Description
320A WHILE STOCKS LAST	Maxi Jack
620A	Skini Jack
820AQ	Bantam Jack
ABJ - DC	Bantam Jack Dust Cap (100 pcs/pkg)
NP3TMC - B	Maxi/Skini Plug
ABP - DP New	Bantam Dummy Plug (10 pcs.)
ABP - TA New	600Ω Bantam Terminating Plug
PH50A	Maxi/Skini/Video Patch Cord Holder
PH50B	Bantam Patch Cord Holder
DS10 - AS1	Designation Strip for Bantam (2 pcs.)
DS10 - AS2	Designation Strip for Skini (2 pcs.)
DS10 - AS3	Designation Strip for Maxi (2 pcs.)

* Listed above items are other manufacturer's products.

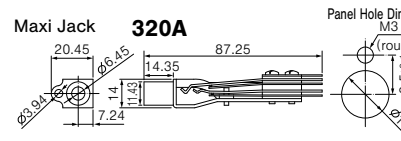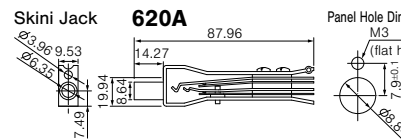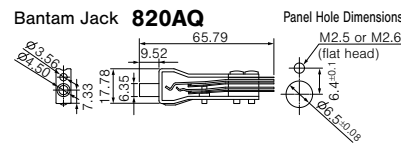

Patch Cord Holder



Capable up to 50 patch cords.
Easy to install on the wall or side of rack.
PH50A for Maxi/Skini, Video cords.
PH50B for Bantam cords.



ABP - DP



ABP - TA

Technical Note


Audio Patchbay Normalling Descriptions

Output from a device is obtained from the upper row, while input to a device is normally connected to the lower row.

Users can select from the following three types of connecting functions.

<Wiring formats connecting upper and lower connectors>


F: Full normal connection

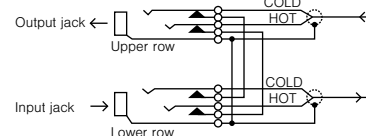

Full Normal Format (series)

The upper (output) row is connected to the lower row (input) in the state when a plug is not inserted.
When a plug is inserted in the upper jack to obtain a signal, the signal is not connected to the lower jack. A signal can be entered by inserting a plug in the lower jack. In this case the signal is not connected to the upper jack.


H: Half normal connection



Half Normal Format (half-parallel)

The upper (output) row is connected to the lower row (input) in the state when a plug is not inserted.
When a plug is inserted in the upper jack to obtain a signal, the signal is connected to the lower jack. This format allows the signal to be obtained in parallel. The signal can be prevented from going to the lower jack by inserting a dummy plug.
Signals are input by inserting a plug in the lower jack. In this case the signal is not connected to the upper jack.

W: Double normal connection

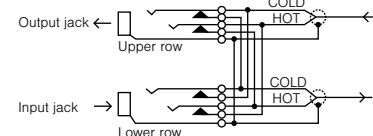

Double Normal Format (series-parallel)

The upper (output) row is connected to the lower row (input) in the state when a plug is not inserted.
When a plug is inserted in the upper jack to obtain a signal, the signal is connected to the lower jack. This format allows the signal to be obtained in parallel. The signal can be prevented from going to the lower jack by inserting a dummy plug.
A signal can be entered by inserting another plug in the lower jack. Note that the signal in this case is connected to the upper jack.
This can be prevented by inserting a dummy plug.

Panels and Patchbays

Audio Patchbays

■ Wired Box


Type	Model	Size	Connector	
			Front	Rear
Bantam	481U-WBF	1RU	820AQ × 96	90-602 × 4
	481U-WBH	1RU	820AQ × 96	90-602 × 4
	481U-WBW	1RU	820AQ × 96	90-602 × 4
	481U-WBS	1RU	820AQ × 96	90-602 × 4
	48WB-F	1RU	820AQ × 96	90-602 × 4
	48WB-H	1RU	820AQ × 96	90-602 × 4
	48WB-W	1RU	820AQ × 96	90-602 × 4
Skini	32WB-F	1RU	620A × 64	90-602 × 4
	32WB-H	1RU	620A × 64	90-602 × 4
	32WB-W	1RU	620A × 64	90-602 × 4
Maxi	26WB-F WHILE STOCKS LAST	1RU	320A × 52	90-602 × 4
	26WB-H WHILE STOCKS LAST	1RU	320A × 52	90-602 × 4
	26WB-W WHILE STOCKS LAST	1RU	320A × 52	90-602 × 4

481U-WB can be recessed 25 mm
 *90-602 connector is identical to
 ELCO 00-8016-090-***-702V connector

90-602




Bantam wired box 481U-WB*

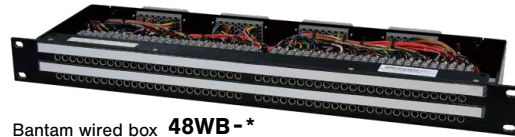

Bantam wired box 48WB-*



Maxi wired box 26WB-*

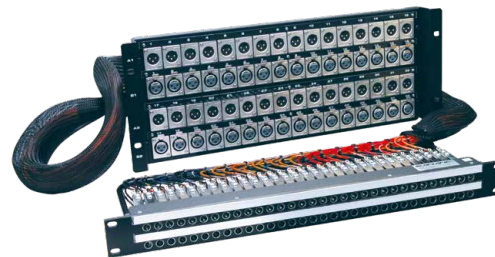

Skini wired panel 32XP-*

■ Wired Panels

Type	Model	Panel 1		Panel 2	
		Size	Connector	Size	Connector
Bantam	48XP-F	1RU	820AQ × 96	3RU × 2	XLR3-31-F77 × 48 XLR3-32-F77 × 48
	48XP-H	1RU	820AQ × 96	3RU × 2	XLR3-31-F77 × 48 XLR3-32-F77 × 48
	48XP-W	1RU	820AQ × 96	3RU × 2	XLR3-31-F77 × 48 XLR3-32-F77 × 48
Skini	32XP-F	1RU	620A × 64	4RU	XLR3-31-F77 × 32 XLR3-32-F77 × 32
	32XP-H	1RU	620A × 64	4RU	XLR3-31-F77 × 32 XLR3-32-F77 × 32
	32XP-W	1RU	620A × 64	4RU	XLR3-31-F77 × 32 XLR3-32-F77 × 32

*Cables are 2 meters in length.

Normaling Options

481U-WB* — F: Full normal
 48WB-* — H: Half normal
 48XP-* — W: Double normal
 S: Single (No normal)




TC*B

(See page 102 or patch cords)

90-602 Connector Format (Wired box)

<Rear panel>



Bantam	Lower row 25~48 ch	Upper row 25~48 ch	Lower row 1~24 ch	Upper row 1~24 ch
Skini	Lower row 17~32 ch	Upper row 17~32 ch	Lower row 1~16 ch	Upper row 1~16 ch
Maxi	Lower row 14~26 ch	Upper row 14~26 ch	Lower row 1~13 ch	Upper row 1~13 ch

90-602 connector is mated with 90-608 connector.
 90-608 requires either 125 or 525 contact and 90-T cover for assembling.


<Wired box side>

90-602

(00-8016-090-000-702V)

<Cable side>

90-608 (00-8016-090-000-708V)



*The numbers in parentheses are ELCO ordering codes.
 ** Contact extraction tool: 06-1877-04.
 Crimping pliers for 525: 06-1001-015 (AWG #18), 06-1001-016 (AWG #20~#22), 06-1001-017 (AWG #24~#26).


Wiring Table for 90-602

	Maxi		Skini		Bantam		HOT	COLD	SHIELD
Channel no.	1	14	1	17	1	25	A	H	R
	2	15	2	18	2	26	B	J	S
	3	16	3	19	3	27	C	K	T
	4	17	4	20	4	28	D	L	U
	5	18	5	21	5	29	E	M	V
	6	19	6	22	6	30	F	N	W
	7	20	7	23	7	31	X	AE	AM
	8	21	8	24	8	32	Y	AF	AN
	9	22	9	25	9	33	Z	AH	AP
	10	23	10	26	10	34	AA	AJ	AR
	11	24	11	27	11	35	AB	AK	AS
	12	25	12	28	12	36	AC	AL	AT
	13	26	13	29	13	37	BJ	BS	BY
			14	30	14	38	BK	BT	BZ
			15	31	15	39	BL	BU	CA
			16	32	16	40	BM	BV	CB
					17	41	BN	BW	CC
					18	42	BP	BX	CD
					19	43	CF	CN	CW
					20	44	CH	CP	CX
					21	45	CJ	CR	CY
					22	46	CK	CS	CZ
					23	47	CL	CT	DA
					24	48	CM	CU	DB

■ Snake Trunk



■ Junction Box

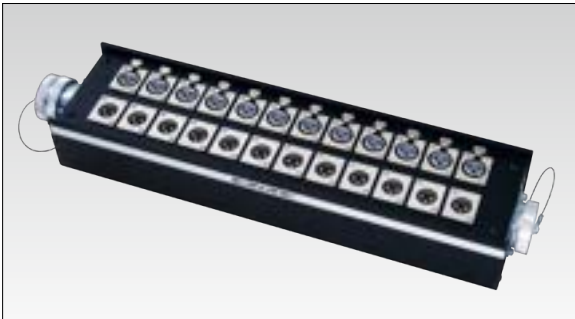


■ Fantail



■ Cable Reel Snake



■ System Example





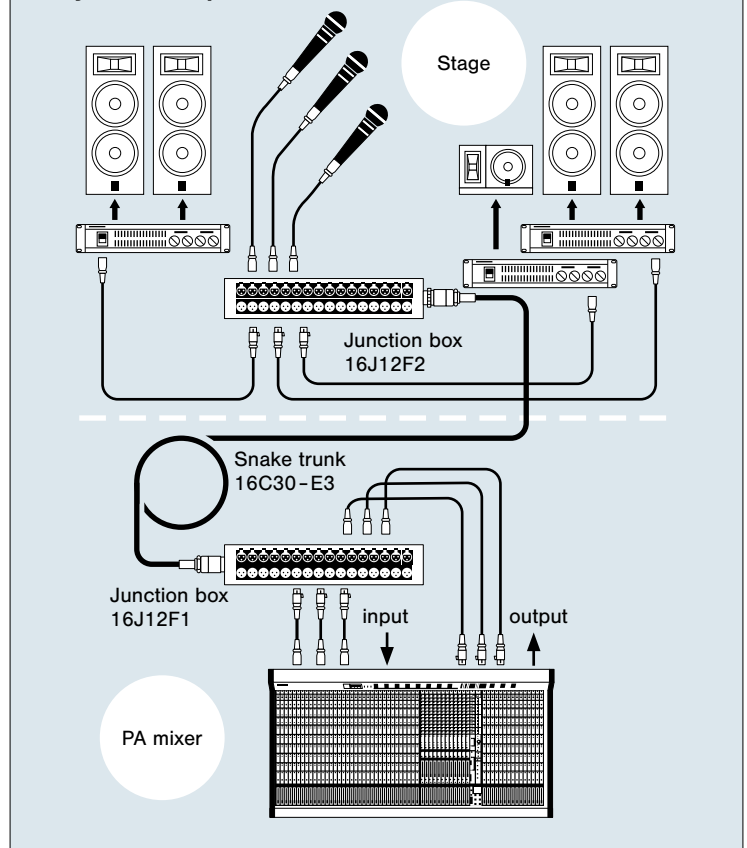


■ Connectors used with Canare multichannel cable system





























Cable mount	Panel mount	Cable mount	Panel mount
XLR3-11C (female)	XLR3-32-F77 (male)	XLR3-12C (male)	XLR3-31-F77 (female)
For multichannel cable Plug	For Junction box Receptacle	For multichannel cable Plug	For Junction box Receptacle
NK27-21C-R (female) + NK-AD1-R (barrel extension)	NK27-32S-R (male)	FK37-21C-R (female) + FK-AD2-R (barrel extension)	FK37-32S-R (male)
NK27-22C-R (male) + NK-AD1-R (barrel extension)	NK27-31S-R (female)	FK37-22C-R (male) + FK-AD2-R (barrel extension)	FK37-31S-R (female)
D/MS3106B32A-10S (female) + EB-02 (barrel extension) + D/MS3057-20A(R1) (cable clamp)	D/MS3102A32A-10P (male)	D/MS3106B36-73S (female) + EB-03 (barrel extension) + D/MS3057-24A(R1) (cable clamp)	D/MS3102A36-73P (male)

Multichannel Systems

Snake Trunks, Cable Reel Snakes

Snake Trunks			Cable Reel Snakes																																							
8 CH	L-4E3 Star quad, Braided shield  Connector: NK27-21C 3/4-R, NK27-22C 3/4-R Cable: L-4E3-8P (black) Rubber bushing: AN3420-12(R1) + Heat Shrink Tube <table><tr><th>Model</th><th>Length</th><th>Weight</th></tr><tr><td>8C05-E3</td><td>5m</td><td>1.6kg</td></tr><tr><td>8C10-E3</td><td>10m</td><td>3.0kg</td></tr><tr><td>8C30-E3</td><td>30m</td><td>8.4kg</td></tr><tr><td>8C50-E3</td><td>50m</td><td>13.8kg</td></tr></table>	Model	Length	Weight	8C05-E3	5m	1.6kg	8C10-E3	10m	3.0kg	8C30-E3	30m	8.4kg	8C50-E3	50m	13.8kg	M2 Two-cord, AT shield  Connector: NK27-21C 3/4-R, NK27-22C 3/4-R Cable: M202-8AT (black) Rubber bushing: AN3420-10(R1), 12(R1) + Heat Shrink Tube <table><tr><th>Model</th><th>Length</th><th>Weight</th></tr><tr><td>8C10-M2</td><td>10m</td><td>1.7kg</td></tr><tr><td>8C30-M2</td><td>30m</td><td>4.5kg</td></tr><tr><td>8C50-M2</td><td>50m</td><td>7.3kg</td></tr></table>	Model	Length	Weight	8C10-M2	10m	1.7kg	8C30-M2	30m	4.5kg	8C50-M2	50m	7.3kg	 Connector: NK27-21C-3/4-R Cable: L-4E3-8P (black) <table><tr><th>Model</th><th>Length</th><th>Weight</th><th>Cable reel</th></tr><tr><td>8R30-E3</td><td>30m</td><td>18.1kg</td><td>R380</td></tr><tr><td>8R50-E3</td><td>50m</td><td>23.0kg</td><td>R380</td></tr></table>	Model	Length	Weight	Cable reel	8R30-E3	30m	18.1kg	R380	8R50-E3	50m	23.0kg	R380
	Model	Length	Weight																																							
8C05-E3	5m	1.6kg																																								
8C10-E3	10m	3.0kg																																								
8C30-E3	30m	8.4kg																																								
8C50-E3	50m	13.8kg																																								
Model	Length	Weight																																								
8C10-M2	10m	1.7kg																																								
8C30-M2	30m	4.5kg																																								
8C50-M2	50m	7.3kg																																								
Model	Length	Weight	Cable reel																																							
8R30-E3	30m	18.1kg	R380																																							
8R50-E3	50m	23.0kg	R380																																							
12 CH	 Connector: NK27-21C 7/8-R, NK27-22C 7/8-R Cable: L-4E3-12P (black) Rubber bushing: AN3420-16(R1) <table><tr><th>Model</th><th>Length</th><th>Weight</th></tr><tr><td>12C05-E3</td><td>5m</td><td>2.1kg</td></tr><tr><td>12C10-E3</td><td>10m</td><td>3.9kg</td></tr><tr><td>12C30-E3</td><td>30m</td><td>11.1kg</td></tr><tr><td>12C50-E3</td><td>50m</td><td>18.3kg</td></tr></table>	Model	Length	Weight	12C05-E3	5m	2.1kg	12C10-E3	10m	3.9kg	12C30-E3	30m	11.1kg	12C50-E3	50m	18.3kg	 Connector: NK27-21C 3/4-R, NK27-22C 3/4-R Cable: M202-12AT (black) Rubber bushing: AN3420-10(R1), 12(R1) + Heat Shrink Tube <table><tr><th>Model</th><th>Length</th><th>Weight</th></tr><tr><td>12C10-M2</td><td>10m</td><td>2.1kg</td></tr><tr><td>12C30-M2</td><td>30m</td><td>5.8kg</td></tr><tr><td>12C50-M2</td><td>50m</td><td>9.3kg</td></tr></table>	Model	Length	Weight	12C10-M2	10m	2.1kg	12C30-M2	30m	5.8kg	12C50-M2	50m	9.3kg	 Connector: NK27-21C-7/8-R Cable: L-4E3-12P (black) <table><tr><th>Model</th><th>Length</th><th>Weight</th><th>Cable reel</th></tr><tr><td>12R30-E3</td><td>30m</td><td>20.6kg</td><td>R380</td></tr><tr><td>12R50-E3</td><td>50m</td><td>30.4kg</td><td>R460</td></tr></table>	Model	Length	Weight	Cable reel	12R30-E3	30m	20.6kg	R380	12R50-E3	50m	30.4kg	R460
	Model	Length	Weight																																							
12C05-E3	5m	2.1kg																																								
12C10-E3	10m	3.9kg																																								
12C30-E3	30m	11.1kg																																								
12C50-E3	50m	18.3kg																																								
Model	Length	Weight																																								
12C10-M2	10m	2.1kg																																								
12C30-M2	30m	5.8kg																																								
12C50-M2	50m	9.3kg																																								
Model	Length	Weight	Cable reel																																							
12R30-E3	30m	20.6kg	R380																																							
12R50-E3	50m	30.4kg	R460																																							
16 CH	 Connector: FK37-21C 7/8-R, FK37-22C 7/8-R Cable: L-4E3-16P (black) Rubber bushing: AN3420-16(R1) <table><tr><th>Model</th><th>Length</th><th>Weight</th></tr><tr><td>16C05-E3</td><td>5m</td><td>2.6kg</td></tr><tr><td>16C10-E3</td><td>10m</td><td>4.9kg</td></tr><tr><td>16C30-E3</td><td>30m</td><td>14.1kg</td></tr><tr><td>16C50-E3</td><td>50m</td><td>23.3kg</td></tr></table>	Model	Length	Weight	16C05-E3	5m	2.6kg	16C10-E3	10m	4.9kg	16C30-E3	30m	14.1kg	16C50-E3	50m	23.3kg	 Connector: FK37-21C 7/8-R, FK37-22C 7/8-R Cable: M202-16AT (black) Rubber bushing: AN3420-10(R1), 12(R1), 16(R1) <table><tr><th>Model</th><th>Length</th><th>Weight</th></tr><tr><td>16C10-M2</td><td>10m</td><td>2.7kg</td></tr><tr><td>16C30-M2</td><td>30m</td><td>7.5kg</td></tr><tr><td>16C50-M2</td><td>50m</td><td>12.3kg</td></tr></table>	Model	Length	Weight	16C10-M2	10m	2.7kg	16C30-M2	30m	7.5kg	16C50-M2	50m	12.3kg	 Connector: FK37-21C-7/8-R Cable: L-4E3-16P (black) <table><tr><th>Model</th><th>Length</th><th>Weight</th><th>Cable reel</th></tr><tr><td>16R30-E3</td><td>30m</td><td>24.1kg</td><td>R380</td></tr><tr><td>16R50-E3</td><td>50m</td><td>36.1kg</td><td>R460</td></tr></table>	Model	Length	Weight	Cable reel	16R30-E3	30m	24.1kg	R380	16R50-E3	50m	36.1kg	R460
	Model	Length	Weight																																							
16C05-E3	5m	2.6kg																																								
16C10-E3	10m	4.9kg																																								
16C30-E3	30m	14.1kg																																								
16C50-E3	50m	23.3kg																																								
Model	Length	Weight																																								
16C10-M2	10m	2.7kg																																								
16C30-M2	30m	7.5kg																																								
16C50-M2	50m	12.3kg																																								
Model	Length	Weight	Cable reel																																							
16R30-E3	30m	24.1kg	R380																																							
16R50-E3	50m	36.1kg	R460																																							
24 CH	 Connector: <D/MS3106B32A-10S+D/MS3057-20A(R1)> × 2 Cable: L-4E3-24P (black) Rubber bushing: AN3420-20(R1) <table><tr><th>Model</th><th>Length</th><th>Weight</th></tr><tr><td>24C05-E3</td><td>5m</td><td>4.3kg</td></tr><tr><td>24C10-E3</td><td>10m</td><td>7.7kg</td></tr><tr><td>24C30-E3</td><td>30m</td><td>21.7kg</td></tr><tr><td>24C50-E3</td><td>50m</td><td>35.7kg</td></tr></table> Extension Cord <D/MS3101A32A-10P+D/MS3057-20A(R1)> × 2 Cable: L-4E3-24P (black) <table><tr><th>Model</th><td>24C005-E3MS22</td></tr></table>	Model	Length	Weight	24C05-E3	5m	4.3kg	24C10-E3	10m	7.7kg	24C30-E3	30m	21.7kg	24C50-E3	50m	35.7kg	Model	24C005-E3MS22	 Connector: <D/MS3106B32A-10S+D/MS3057-20A(R1)> × 2 Cable: M202-24AT (black) Rubber bushing: AN3420-16(R1), 20(R1) + Heat Shrink Tube <table><tr><th>Model</th><th>Length</th><th>Weight</th></tr><tr><td>24C10-M2</td><td>10m</td><td>4.0kg</td></tr><tr><td>24C30-M2</td><td>30m</td><td>10.4kg</td></tr><tr><td>24C50-M2</td><td>50m</td><td>16.8kg</td></tr></table>	Model	Length	Weight	24C10-M2	10m	4.0kg	24C30-M2	30m	10.4kg	24C50-M2	50m	16.8kg	 Connector: D/MS3106B32A-10S Cable: L-4E3-24P (black) <table><tr><th>Model</th><th>Length</th><th>Weight</th><th>Cable reel</th></tr><tr><td>24R30-E3</td><td>30m</td><td>34.6kg</td><td>R460</td></tr></table>	Model	Length	Weight	Cable reel	24R30-E3	30m	34.6kg	R460		
	Model	Length	Weight																																							
24C05-E3	5m	4.3kg																																								
24C10-E3	10m	7.7kg																																								
24C30-E3	30m	21.7kg																																								
24C50-E3	50m	35.7kg																																								
Model	24C005-E3MS22																																									
Model	Length	Weight																																								
24C10-M2	10m	4.0kg																																								
24C30-M2	30m	10.4kg																																								
24C50-M2	50m	16.8kg																																								
Model	Length	Weight	Cable reel																																							
24R30-E3	30m	34.6kg	R460																																							
32 CH	 Connector: <D/MS3106B36-73S+D/MS3057-24A(R1)> × 2 Cable: M202-32AT (black) Rubber bushing: AN3420-16(R1), 20(R1), 24(R1) <table><tr><th>Model</th><th>Length</th><th>Weight</th></tr><tr><td>32C10-M2</td><td>10m</td><td>4.8kg</td></tr><tr><td>32C30-M2</td><td>30m</td><td>13.1kg</td></tr><tr><td>32C50-M2</td><td>50m</td><td>21.0kg</td></tr></table> Extension Cord <D/MS3101A36-73P+D/MS3057-24A(R1)> × 2 Cable: M202-32AT (black) <table><tr><th>Model</th><td>32C005-M2MS22</td></tr></table>	Model	Length	Weight	32C10-M2	10m	4.8kg	32C30-M2	30m	13.1kg	32C50-M2	50m	21.0kg	Model	32C005-M2MS22	 Connector: <D/MS3101A36-73P+D/MS3057-24A(R1)> × 2 Cable: M202-32AT (black) <table><tr><th>Model</th><th>Length</th><th>Weight</th></tr><tr><td>32C10-M2</td><td>10m</td><td>4.8kg</td></tr><tr><td>32C30-M2</td><td>30m</td><td>13.1kg</td></tr><tr><td>32C50-M2</td><td>50m</td><td>21.0kg</td></tr></table>	Model	Length	Weight	32C10-M2	10m	4.8kg	32C30-M2	30m	13.1kg	32C50-M2	50m	21.0kg	Website  Snake Trunk Website  Cable Reel Snakes Website  Fantail Website  Junction Box ☐ ☐ : Female ☒ ☒ : Male													
	Model	Length	Weight																																							
32C10-M2	10m	4.8kg																																								
32C30-M2	30m	13.1kg																																								
32C50-M2	50m	21.0kg																																								
Model	32C005-M2MS22																																									
Model	Length	Weight																																								
32C10-M2	10m	4.8kg																																								
32C30-M2	30m	13.1kg																																								
32C50-M2	50m	21.0kg																																								

Note: Connecting cables 24C005-E3MS22 and 32C005-M2MS22 are to be used to interconnect snake trunks only and they do not mate with our other standard snake system.

Fantails	Junction Boxes		
 8S1N2 Connector: XLR3-11C × 8, NK27-22C-3/4-R Cable: L-4E6S (black) 1.5m Weight: 1.1kg  8S2N1 Connector: XLR3-12C × 8, NK27-21C-3/4-R Cable: L-4E6S (black) 1.5m Weight: 1.0kg	Single XLR per channel  8B1N2 Connector: XLR3-31-F77 × 8, NK27-32S-R × 1 Weight: 0.9kg  8B2N1 Connector: XLR3-32-F77 × 8, NK27-31S-R × 1 Weight: 1.1kg	Parallel XLR per channel  8J12N2 Connector: XLR3-31-F77 × 8, XLR3-32-F77 × 8, NK27-32S-R × 1 Weight: 1.5kg  8J12N1 Connector: XLR3-31-F77 × 8, XLR3-32-F77 × 8, NK27-31S-R × 1 Weight: 1.5kg	Parallel XLR per channel MultiPin feed through  8J12N12 Connector: XLR3-31-F77 × 8, XLR3-32-F77 × 8, NK27-31S-R × 1, NK27-32S-R × 1 Weight: 1.6kg
 12S1N2 Connector: XLR3-11C × 12, NK27-22C-3/4-R Cable: L-4E5C (black) 1.5m Weight: 1.4kg  12S2N1 Connector: XLR3-12C × 12, NK27-21C-3/4-R Cable: L-4E5C (black) 1.5m Weight: 1.3kg	Single XLR per channel  12B1N2 Connector: XLR3-31-F77 × 12, NK27-32S-R × 1 Weight: 1.3kg  12B2N1 Connector: XLR3-32-F77 × 12, NK27-31S-R × 1 Weight: 1.2kg	Parallel XLR per channel  12J12N2 Connector: XLR3-31-F77 × 12, XLR3-32-F77 × 12, NK27-32S-R × 1 Weight: 2.1kg  12J12N1 Connector: XLR3-31-F77 × 12, XLR3-32-F77 × 12, NK27-31S-R × 1 Weight: 2.1kg	Parallel XLR per channel MultiPin feed through  12J12N12 Connector: XLR3-31-F77 × 12, XLR3-32-F77 × 12, NK27-31S-R × 1, NK27-32S-R × 1 Weight: 2.2kg
 16S1F2 Connector: XLR3-11C × 16, FK37-22C-7/8-R Cable: L-4E5C (black) 1.5m Weight: 1.9kg  16S2F1 Connector: XLR3-12C × 16, FK37-21C-7/8-R Cable: L-4E5C (black) 1.5m Weight: 1.7kg	Single XLR per channel  16B1F2 Connector: XLR3-31-F77 × 16, FK37-32S-R × 1 Weight: 1.6kg  16B2F1 Connector: XLR3-32-F77 × 16, FK37-31S-R × 1 Weight: 1.3kg	Parallel XLR per channel  16J12F2 Connector: XLR3-31-F77 × 16, XLR3-32-F77 × 16, FK37-32S-R × 1 Weight: 2.5kg  16J12F1 Connector: XLR3-31-F77 × 16, XLR3-32-F77 × 16, FK37-31S-R × 1 Weight: 2.5kg	Parallel XLR per channel MultiPin feed through  16J12F12 Connector: XLR3-31-F77 × 16, XLR3-32-F77 × 16, FK37-31S-R × 1, FK37-32S-R × 1 Weight: 2.6kg
 24S1MS2 Connector: XLR3-11C × 24, D/MS3101A32A-10P Cable: L-4E5C (black) 2m  24S2MS2 Connector: XLR3-12C × 24, D/MS3101A32A-10P Cable: L-4E5C (black) 2m		 24B12MS Connector: XLR3-31-F77 × 24 (on top), XLR3-32-F77 × 24 (12 on each side), D/MS3102A32A-10P Weight: 2.7kg	 24B12MSW Connector: XLR3-31-F77 × 24 (on top), XLR3-32-F77 × 24 (12 on each side), D/MS3102A32A-10P × 2 Weight: 3.0kg
 32S1MS2 Connector: XLR3-11C × 32, D/MS3101A36-73P Cable: L-4E5C (black) 2m  32S2MS2 Connector: XLR3-12C × 32, D/MS3101A36-73P Cable: L-4E5C (black) 2m		 32B12MS Connector: XLR3-31-F77 × 32, XLR3-32-F77 × 32, D/MS3102A36-73P Weight: 5.3kg  32B12MWF11 Connector: XLR3-31-F77 × 32, XLR3-32-F77 × 32, D/MS3102A36-73P × 2, FK37-31S-R × 2 Weight: 6.0kg	 32B12MSW Connector: XLR3-31-F77 × 32, XLR3-32-F77 × 32, D/MS3102A36-73P × 2 Weight: 5.5kg  32B12MF11 Connector: XLR3-31-F77 × 32, XLR3-32-F77 × 32, D/MS3102A36-73P × 1, FK37-31S-R × 2 Weight: 5.7kg


Multichannel Systems

Pin Assignments, Reels


Multichannel Connector Pin Assignments

Ch No.	Cable Unit Identification		32ch		24ch		16ch		8ch / 12ch	
	Spiral Marker Color	Insulator Color	D/MS3102A36-73 D/MS3106B36-73		D/MS3102A32A-10 D/MS3106B32A-10		FK37		NK27	
			HOT	COLD	HOT	COLD	HOT	COLD	HOT	COLD
1	RED	RED • WHT	A	B	A	B	1	2	1	3
2	BLU	BLU •	C	D	C	D	3	4	4	5
3	YEL	YEL •	F	H	F	G	5	6	6	7
4	GRN	GRN •	J	K	H	J	8	9	8	9
5	BRN	BRN •	L	M	K	L	10	11	11	12
6	N/A	GRY •	N	P	N	O	12	13	13	14
7	BLU • BLK	BLU • BLK	R	S	P	R	14	15	15	16
8	YEL • BLK	YEL •	T	U	S	T	16	17	17	18
9	GRN • BLK	GRN •	V	W	U	V	21	22	19	20
10	BRN • BLK	BRN •	Y	Z	X	Y	23	24	22	23
11	BLK	GRY •	a	b	Z	a	25	26	24	25
12	BLU • ORN	BLU • ORN	c	d	b	c	27	28	26	27
13	YEL • ORN	YEL •	f	g	d	e	29	30	SHIELD	
14	GRN • ORN	GRN •	h	i	g	h	32	33		
15	BRN • ORN	BRN •	j	k	j	k	34	35	SHIELD	
16	ORN	GRY •	m	n	m	n	36	37		
17	BLU • PNK	BLU • PNK	u	v	p	q	SHIELD		19	
18	YEL • PNK	YEL •	w	x	s	t				
19	GRN • PNK	GRN •	y	z	u	v	SHIELD		19	
20	BRN • PNK	BRN •	AA	AB	w	x				
21	PNK	GRY •	AC	AD	AB	z	SHIELD		19	
22	BLU • WHT	BLU • RED	AE	AF	AA	AC				
23	YEL • WHT	YEL •	AH	AJ	AD	AF	SHIELD		19	
24	GRN • WHT	GRN •	AL	AM	AG	AE				
25	—	BRN •	AN	AP	SHIELD		SHIELD		19	
26	—	GRY •	AR	AS						
27	—	YEL • BLU	AT	AU	SHIELD		SHIELD		19	
28	—	GRN •	AV	AW						
29	—	BRN •	AX	AY	SHIELD		SHIELD		19	
30	—	GRN • YEL	AZ	BA						
31	—	BRN •	BC	BD	SHIELD		SHIELD		19	
32	—	GRY •	BE	BF						
			SHIELD							
			E	q	t					
			X	r	AK					
			p	s	BB					


32ch




24ch



16ch




8-12ch



■ Connection Method

L-4E3 Types:

Identify the channel number by the color of the spiral marker on the inner jacket (gray). The unit is 4-core construction and the insulator colors are blue, blue, white, and white. Connect these with the same colored cores, so that the blue cores are connected to Hot and the white cores to Cold.



M202 Types:

The unit is 2-core construction, with the channel number identified by the insulator color (a combination of the identifying color and common identifying color). Connect the identifying color core to Hot, and the common identifying color core to Cold.

■ Connections to XLR Connectors

Polarity	HOT	COLD	SHIELD
Pin No.	2	3	1


Lightweight Cable Reels

Lightweight plastic cable reels made by Schill™

Model	Flange Dim.	Description	Weight
RGT310.RM	310 mm	with auxiliary reel	1.8 kg
RGT380.RM	380 mm		4.8 kg
RGT310.MFK	310 mm	with latching door	1.4 kg
RGT380.MFK	380 mm		4.3 kg

Color: dark blue

- Canare and Schill™ collaboration
- *Schill™ is a trademark of Schill GmbH & Co. KG
- Easy to carry around
- High quality resin: durable, weatherproof and lightweight.
- Locking brake
- Latching door type (MFK) allows you to store cable connector inside reel.
- Canare special colored flange
- Rough estimate of maximum cable lengths (cable O.D.)
- RGT310: L-4E6S 120 m (6 mm)
- RGT380: L-5CFW 130 m (7.7 mm)
- RJC6A-4P-SFM 110m (8.6 mm)
- LF-2SM9N 100m (9.2 mm)

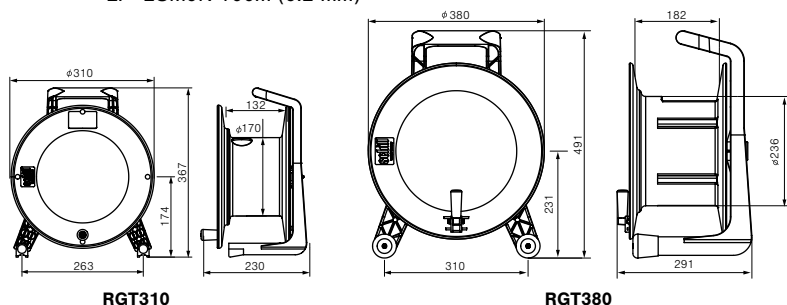

RGT310.RM




RGT380.MFK



RGT380.MFK
door open

Website

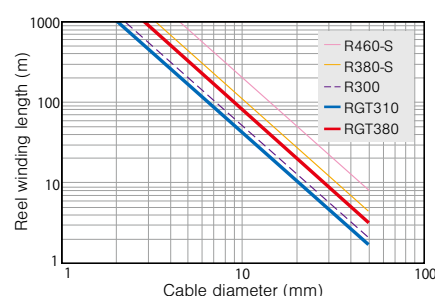

Cable winding length reference chart

Cable Reels

Dependable cable reels Dependable steel reels with 3-speed brake

Model	Flange Dim.	Description	Feature	Weight
R300-S	300 mm	with auxiliary reel	stackable	4.6 kg
R380-S	380 mm		w/caster	8.3 kg
R460-S	460 mm		w/caster	9.9 kg
R300	300 mm	cable hole on hub (no exit)	stackable	4.3 kg
R300-L	300 mm	connector trench on hub (no holes)	stackable	4.4 kg
R300-CN	300 mm	XLR3 receptacles on hub and flange	stackable	4.6 kg
R300-BN	300 mm	BNC receptacles on hub and flange	stackable	4.6 kg


Color: black

- 3-speed brake: lock/soft/free
- Oilless bearing
- Tubular steel E brace construction
- Parallel wired M & F XLR3s for genderless connection (R300-CN)

Website



Wiring

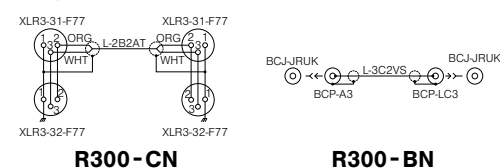

3-speed brake



R460-S



R300-S

Reels with Cable Assemblies


Cable reels with detachable cables

Model	Cable reel	Description		Weight (kg)
		Inner end	Outer end	
CR100-CN	R300-CN	XLR3-12C	L-4E6S(100m) XLR3-11C	9.6
CR100-S	R300-S	XLR3-12C	L-4E6S(100m) XLR3-11C	9.6
CR90-BN	R300-BN	BCP-H5B	L-5C2VS(90m) BCP-H5B	10.5


Website



Dimensions

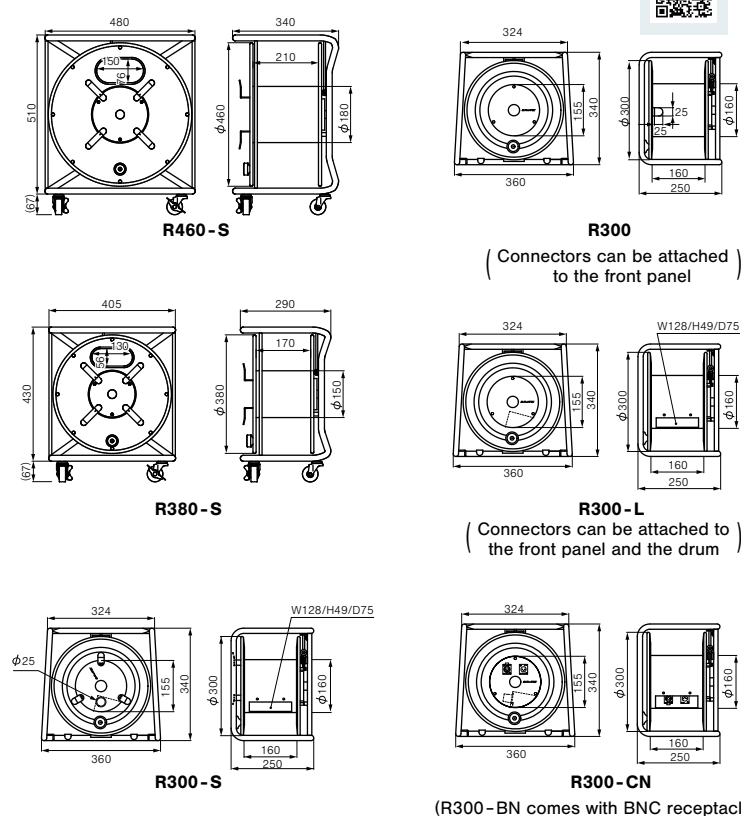

CR100-CN



Cable winding length reference chart

<Wind length conversion formula>

$$R300-S \quad L = \frac{8448}{D^2} \times 0.6 \text{ (m)} \quad R460-S \quad L = \frac{33852}{D^2} \times 0.6 \text{ (m)}$$

$$R380-S \quad L = \frac{18207}{D^2} \times 0.6 \text{ (m)} \quad D: \text{cable outer diameter (mm)} \\ L: \text{wind length}$$




Cable Assemblies

BNC

- High quality and reliable Canare assemblies are ideal for any interconnection including broadcast, professional A/V, and telecommunication.
- Custom assembly configurations can be special ordered at affordable cost and quick lead-time.






■ BNC 12G-SDI

Type	Model	Length (m)
BNC (M) - BNC (M) Crimp For fixed installation 	D3.3UHDC005E	0.5
	D3.3UHDC01E	1
	D3.3UHDC015E	1.5
	D3.3UHDC02E	2
	D3.3UHDC03E	3
	D3.3UHDC05E	5
BNC (M) - BNC (M) Crimp For fixed installation 	D3.3UHDC10E	10
	D5.5UHDC01E	1
	D5.5UHDC03E	3
	D5.5UHDC05E	5
	D5.5UHDC10E	10
	D5.5UHDC20E	20
BNC (M) - BNC (M) Crimp For mobile applications 	D5.5UHDC30E	30
	D5.5UHDC50E	50
	D5.5UHDC70E	70
	D5.5UHDC100E	100
	D5.5UHCW10-S New	10
	D5.5UHCW20-S New	20
BNC (M) - BNC (M) Crimp For mobile applications 	D5.5UHCW30-S New	30
	D5.5UHCW50-S New	50
	D5.5UHCW50-S New	50

■ BNC

For fixed installation



Type	Model	Length (m)
BNC (M) - BNC (M) Crimp 	D3FBC005E	0.5
	D3FBC01E	1
	D3FBC015E	1.5
	D3FBC02E	2
	D3FBC03E	3
	D3FBC05E	5
BNC (M) - BNC (M) Crimp 	D3FBC10E	10
	D2.5HDC005E	0.5
	D2.5HDC01E	1
	D2.5HDC015E	1.5
	D2.5HDC02E	2
	D2.5HDC03E	3
BNC (M) - BNC (M) Crimp 	D2.5HDC05E	5
	D2.5HDC10E	10
	D4.5HDC03E	3
	D4.5HDC05E	5
	D4.5HDC10E	10
	D4.5HDC15E	15
BNC (M) - BNC (M) Crimp 	D4.5HDC20E	20
	D4.5HDC20E	20

Website



■ BNC


For mobile applications

Type	Model	Length (m)
BNC (M) - BNC (M) Crimp 	D3C005A-S	0.5
	D3C01A-S	1
	D3C02A-S	2
	D3C03A-S	3
	D3C05A-S	5
	D3C10A-S	10
BNC (M) - BNC (M) Crimp 	D5C005A-S	0.5
	D5C01A-S	1
	D5C015A-S	1.5
	D5C03A-S	3
	D5C05A-S	5
	D5C10A-S	10
BNC (M) - BNC (M) Crimp 	D5C15A-S	15
	D5C20A-S	20
	D5C20A-S	20

Website




■ BNC water-proof **New**


Type	Model	Length (m)
BNC (M) - BNC (M) 12G-SDI 	WD5.5UHDC20	20
	WD5.5UHDC30	30
	WD5.5UHDC50	50
	WD5.5UHDC50	50

Sold separately: BNC Cap: BCP-DC (20 pcs.) • BCP-W55UHD is not for sale.





■ BNC - DIN

Type	Model	Length (m)
BNC (M) - DIN (M) Crimp 	D2.5HDC005E-D	0.5
	D2.5HDC01E-D	1
	D2.5HDC015E-D	1.5
	D2.5HDC02E-D	2
	D2.5HDC03E-D	3
	D2.5HDC05E-D	5
BNC (M) - DIN (M) Crimp 	D2.5HDC10E-D	10
	D4.5HDC03E-D	3
	D4.5HDC05E-D	5
	D4.5HDC10E-D	10
	D4.5HDC15E-D	15
	D4.5HDC20E-D	20

■ BNC - RCA

Type	Model	Length (m)
BNC (M) - RCA (M) 	D3C01A-SR	1
	D3C03A-SR	3
	D3C05A-SR	5

Micro BNC New

Type	Model	Length (m)
Micro BNC (M) - Micro BNC (M) Crimp 12G-SDI  BLK BRN RED ORN YEL GRN BLU PPL GRY WHT PNK	DM2.5HDC005A	0.5
	DM2.5HDC01A	1
	DM2.5HDC015A	1.5
	DM2.5HDC02A	2
	DM2.5HDC03A	3
Micro BNC (M) - BNC (M) Crimp  BLK BRN RED ORN YEL GRN BLU PPL GRY WHT PNK	DM2.5HDC005EA-BP	0.5
	DM2.5HDC01EA-BP	1
	DM2.5HDC015EA-BP	1.5
	DM2.5HDC02EA-BP	2
	DM2.5HDC03EA-BP	3
Micro BNC (M) - Micro BNC (M) Crimp 12G-SDI  BLK BRN GRN PPL	DM3.3UHDC03A	3
	DM3.3UHDC05A	5
Micro BNC (M) - BNC (M) Crimp 12G-SDI  BLK BRN GRN PPL	DM3.3UHDC03EA-BP	3
	DM3.3UHDC05EA-BP	5
Micro BNC (M) - BNC (F) Crimp 12G-SDI  BLK BRN RED YEL GRN BLU PPL	DM2.5HWS002EA-BJ	0.2





DM2.5HDC**A

Website




DIN

Type	Model	Length (m)
DIN (M) - DIN (M) Crimp  BLK RED YEL GRN BLU GRY WHT	DN2.5HDC005	0.5
	DN2.5HDC01	1
	DN2.5HDC015	1.5
	DN2.5HDC02	2
	DN2.5HDC03	3
	DN2.5HDC05	5
	DN2.5HDC10	10
DIN (M) - DIN (M) Crimp  BLK BRN RED ORN YEL GRN BLU PPL GRY WHT	DN4.5HDC03	3
	DN4.5HDC05	5
	DN4.5HDC10	10
	DN4.5HDC15	15
DIN (M) - BNC (F) Crimp  BLK BRN RED YEL GRN BLU PPL	DN2.5HWS002E-BJ	0.2

Website



RCA (Video)


Type	Model	Length (m)
RCA (M) - RCA (M) Solder  BLK BRN RED ORN YEL GRN BLU GRY WHT	DRC01-S	1
	DRC03-S	3
	DRC05-S	5
RCA (M) - RCA (M) Crimp  BLK RED YEL GRN BLU WHT	DRC10-F3	10
	DRC15-F3	15
	DRC20-F3	20
	DRC30-F3	30
	DRC40-F3	40

Website



Triax

Cables used for connections such as those between broadcast cameras and CCUs.

Type	Model	Length (m)
Triaxial (F) - Triaxial (M) U.S. preferred type  RED	TXC10-K	10
	TXC20-K	20
	TXC30-K	30
	TXC50-K	50
	TXC100-K	100
	TXC150-K	150
	TXC200-K	200
Triaxial (F) - Triaxial (M) EU preferred type  BLK RED GRN	TXC10-F	10
	TXC20-F	20
	TXC30-F	30
	TXC50-F	50
	TXC100-F	100
	TXC150-F	150
	TXC200-F	200


Website



Cable Assemblies

Ethernet

■ Cat6A (Standard F/UTP) New

Type	Model	Length (m)
RJ45 - RJ45  T568B (Straight)	NC6AFSD-01	1
	NC6AFSD-015	1.5
	NC6AFSD-02	2
	NC6AFSD-03	3
	NC6AFSD-05	5
	NC6AFSD-07	7
	NC6AFSD-10	10
	NC6AFSD-15	15
	NC6AFSD-20	20
	NC6AFSD-25	25
	NC6AFSD-30	30
	NC6AFSD-35	35
	NC6AFSD-40	40
	NC6AFSD-45	45
	NC6AFSD-50	50
	NC6AFSD-70	70




• RJC6A-4P-F-SD is not for sale.



Website

■ Cat6A (Flexible SF/UTP) New

Easy routing

Type	Model	Length (m)
etherCON - etherCON  T568B (Straight)	ETC6A-03-N	3
	ETC6A-05-N	5
	ETC6A-10-N	10
	ETC6A-20-N	20
	ETC6A-30-N	30
	ETC6A-50-N	50
	ETC6A-70-N	70
	ETC6A-100-N	100
	ETC6A-03-T	3
	ETC6A-05-T	5
RJ45 - RJ45  T568B (Straight)	ETC6A-10-T	10
	ETC6A-20-T	20
	ETC6A-30-T	30
	ETC6A-50-T	50
	ETC6A-70-T	70
	ETC6A-100-T	100
	ETC6A-01-TN	1
	ETC6A-02-TN	2
	ETC6A-03-TN	3
	ETC6A-05-TN	5
etherCON - RJ45  T568B (Straight)	ETC6A-10-TN	10
	ETC6A-20-TN	20
	ETC6A-30-TN	30
	ETC6A-50-TN	50



ETC6A-**-N




ETC6A-**-T



Website


■ Cat6 (Standard F/UTP)

Type	Model	Length (m)
RJ45 - RJ45  T568B (Straight)	NC6F-01	1
	NC6F-015	1.5
	NC6F-02	2
	NC6F-03	3
	NC6F-05	5
	NC6F-07	7
	NC6F-10	10
	NC6F-15	15
	NC6F-20	20
	NC6F-25	25
	NC6F-30	30
	NC6F-35	35
	NC6F-40	40
	NC6F-45	45
	NC6F-50	50
	NC6F-70	70
	NC6F-100	100



Website


■ Cat6 (Standard U/UTP)

Type	Model	Length (m)
RJ45 - RJ45  T568B (Straight)	NC6-003	0.3
	NC6-005	0.5
	NC6-01	1
	NC6-015	1.5
	NC6-02	2
	NC6-03	3
	NC6-05	5
	NC6-07	7
	NC6-10	10
	NC6-15	15
	NC6-20	20
	NC6-25	25
	NC6-30	30
	NC6-35	35
	NC6-40	40
	NC6-45	45
	NC6-50	50



Website

■ Cat5e (Standard U/UTP)

Type	Model	Length (m)
RJ45 - RJ45  T568B (Straight)	NC5E-003	0.3
	NC5E-005	0.5
	NC5E-01	1
	NC5E-015	1.5
	NC5E-02	2
	NC5E-03	3
	NC5E-05	5
	NC5E-07	7
	NC5E-10	10
	NC5E-15	15
	NC5E-20	20
	NC5E-25	25
	NC5E-30	30
	NC5E-35	35
	NC5E-40	40
	NC5E-45	45
	NC5E-50	50



Website

■ Cat5e (Flexible U/UTP)

Easy routing

Type	Model	Length (m)
etherCON - etherCON NE8MX-B-1 RJC5E-4P-WJ NE8MX-B-1	ETC10L-B	10
	ETC30L-B	30
	ETC50L-B	50
	ETC70L-B	70
	ETC100L-B	100
BLK T568B (Straight)		
RJ45 - RJ45 RJ45 RJC5E-4P-WJ RJ45	ETC10L-M	10
	ETC30L-M	30
	ETC50L-M	50
	ETC70L-M	70
	ETC100L-M	100
BLK T568B (Straight)		

Website



■ Cat5e (Flexible S/UTP) For short distance (max. 50 m)

Type	Model	Length (m)
etherCON - etherCON NE8MX-B-1 RJC5E-4P-BS NE8MX-B-1	ETC003S-B	0.3
	ETC005S-B	0.5
	ETC01S-B	1
	ETC015S-B	1.5
	ETC02S-B	2
	ETC03S-B	3
	ETC05S-B	5
	ETC07S-B	7
	ETC10S-B	10
	ETC15S-B	15
	ETC20S-B	20
RJ45 - RJ45 RJ45 RJC5E-4P-BS RJ45	ETC003S-M	0.3
	ETC005S-M	0.5
	ETC01S-M	1
	ETC015S-M	1.5
	ETC02S-M	2
	ETC03S-M	3
	ETC05S-M	5
	ETC07S-M	7
	ETC10S-M	10
	ETC15S-M	15
	ETC20S-M	20
etherCON - RJ45 NE8MX-B-1 RJC5E-4P-BS RJ45	ETC01S-BM	1
	ETC02S-BM	2
	ETC03S-BM	3
	ETC05S-BM	5
	ETC10S-BM	10
	ETC20S-BM	20
	ETC30S-BM	30
	ETC50S-BM	50

Website

■ Quad-Cat5e (Flexible UTP) New

Type	Model	Length (m)
RJ45 - RJ45 Heat Shrink Tubes RJC5E-4P4C T568B (Straight)	4ETCS-30-T	30
	4ETCS-50-T	50

Website



■ RS422

Used for RS422 serial signals.

Type	Model	Length (m)
Dsub9P (M) - Dsub9P (M) 17JE-23090-02 (D8A6)-CG 17JE-23090-02 (D8A6)-CG A2C3-SS Screws: 2.6	DC01-9JE22	1
	DC03-9JE22	3
	DC05-9JE22	5
	DC07-9JE22	7
	DC10-9JE22	10
	DC20-9JE22	20
	DC30-9JE22	30

Website



■ DMX

Used for controlling stage and studio lighting equipment.

Type	Model	Length (m)
NC5 (F) - NC5 (M) Standard NC5FXX-B DMX203-2P NC5MXX-B	DMC01-B	1
	DMC03-B	3
	DMC05-B	5
	DMC10-B	10
	DMC20-B	20
	DMC30-B	30
	DMC50-B	50
	DMC100-B	100

NC5 (F) - NC5 (M) Thinner NC5FXX-B DMX403 NC5MXX-B	DM4C01-B	1
	DM4C02-B	2
	DM4C03-B	3
	DM4C05-B	5
	DM4C10-B	10
	DM4C20-B	20
	DM4C30-B	30
	DM4C50-B	50
	DM4C100-B	100

NC5 (F) - NC5 (M) Thinnest (pins 4 & 5 unconnected) NC5FXX-B DMX203 NC5MXX-B	DM2C01-B	1
	DM2C02-B	2
	DM2C03-B	3
	DM2C05-B	5
	DM2C10-B	10
	DM2C20-B	20
	DM2C30-B	30
	DM2C50-B	50
	DM2C100-B	100







Website









Cable Assemblies

XLR, Phone

XLR3

Type	Model	Length (m)
XLR3 (F) – XLR3 (M) 	EC003	0.3
	EC005	0.5
	EC01	1
	EC015	1.5
	EC02	2
	EC03	3
	EC05	5
	EC07	7
	EC10	10
	EC15	15
	EC20	20
	EC003-X11	0.3
	EC005-X11	0.5
	EC01-X11	1
XLR3 (F) – XLR3 (F) 	EC003-X11	0.3
	EC005-X11	0.5
	EC01-X11	1
	EC015-X11	1.5
	EC02-X11	2
	EC03-X11	3
	EC05-X11	5
	EC10-X11	10
	EC003-X22	0.3
	EC005-X22	0.5
	EC01-X22	1
	EC015-X22	1.5
	EC02-X22	2
	EC03-X22	3
XLR3 (M) – XLR3 (M) 	EC003-X22	0.3
	EC005-X22	0.5
	EC01-X22	1
	EC015-X22	1.5
	EC02-X22	2
	EC03-X22	3
	EC05-X22	5
	EC10-X22	10
	EC003-B	0.3
	EC005-B	0.5
	EC01-B	1
	EC015-B	1.5
	EC02-B	2
	EC03-B	3
NC3 (F) – NC3 (M) 	EC05-B	5
	EC07-B	7
	EC10-B	10
	EC15-B	15
	EC20-B	20
	EC003-B11	0.3
	EC005-B11	0.5
	EC01-B11	1
	EC015-B11	1.5
	EC02-B11	2
	EC03-B11	3
	EC05-B11	5
	EC10-B11	10
	EC003-B22	0.3
NC3 (F) – NC3 (F) 	EC005-B22	0.5
	EC01-B22	1
	EC015-B22	1.5
	EC02-B22	2
	EC03-B22	3
	EC05-B22	5
	EC10-B22	10
	EC003-B22	0.3
	EC005-B22	0.5
	EC01-B22	1
	EC015-B22	1.5
	EC02-B22	2
	EC03-B22	3
NC3 (M) – NC3 (M) 	EC05-B22	5
	EC10-B22	10
	EC003-B22	0.3
	EC005-B22	0.5
	EC01-B22	1
	EC015-B22	1.5
	EC02-B22	2
	EC03-B22	3
	EC05-B22	5
	EC10-B22	10
	EC003-B22	0.3
	EC005-B22	0.5
	EC01-B22	1
	EC015-B22	1.5

Phone

Type	Model	Length (m)
Mono Phone (M) – Mono Phone (M) 	LC018	1.8
	LC03	3
	LC05	5
	PC03	3
	PC05	5
	PC07	7
	PC10	10
	PC03-B	3
	PC05-B	5
	PC07-B	7
	SPC01	1
	SPC03	3
	SPC05	5
	SPC07	7
XLR3 (F) – Mono Phone (M) 	SPC10	10
	SPC02-B1	2
	SPC05-B1	5
	SPC02-B2	2
	SPC05-B2	5
	SPC01	1
	SPC03	3
	SPC05	5
	SPC07	7
	SPC10	10
	SPC02-B1	2
	SPC05-B1	5
	SPC02-B2	2
	SPC05-B2	5
NC3 (F) – Mono Phone (M) 	SPC01	1
	SPC03	3
	SPC05	5
	SPC07	7
	SPC10	10
	SPC02-B1	2
	SPC05-B1	5
	SPC02-B2	2
	SPC05-B2	5
	SPC01	1
	SPC03	3
	SPC05	5
	SPC07	7
	SPC10	10
Stereo Phone (M) – Stereo Phone (M) 	SPC01	1
	SPC03	3
	SPC05	5
	SPC07	7
	SPC10	10
	SPC02-B1	2
	SPC05-B1	5
	SPC02-B2	2
	SPC05-B2	5
	SPC01	1
	SPC03	3
	SPC05	5
	SPC07	7
	SPC10	10
NC3 (F) – Stereo Phone (M) 	SPC01	1
	SPC03	3
	SPC05	5
	SPC07	7
	SPC10	10
	SPC02-B1	2
	SPC05-B1	5
	SPC02-B2	2
	SPC05-B2	5
	SPC01	1
	SPC03	3
	SPC05	5
	SPC07	7
	SPC10	10
NC3 (M) – Stereo Phone (M) 	SPC01	1
	SPC03	3
	SPC05	5
	SPC07	7
	SPC10	10
	SPC02-B1	2
	SPC05-B1	5
	SPC02-B2	2
	SPC05-B2	5
	SPC01	1
	SPC03	3
	SPC05	5
	SPC07	7
	SPC10	10

Website







XLR3

Website






Phone

RCA (Audio)

Type	Model	Length (m)
RCA (M) – RCA (M)  BLK RED ORN YEL GRN BLU	RC018	1.8
	RC03	3
	RC05	5
XLR3 (F) – RCA (M)  BLK BRN RED ORN YEL GRN BLU PPL GRY WHT	RC02-X1	2
	RC05-X1	5
XLR3 (M) – RCA (M)  BLK BRN RED ORN YEL GRN BLU PPL GRY WHT	RC02-X2	2
	RC05-X2	5
NC3 (F) – RCA (M)  BLK BRN RED ORN YEL GRN BLU PPL GRY WHT	New RC02-B1	2
	New RC05-B1	5
NC3 (M) – RCA (M)  BLK BRN RED ORN YEL GRN BLU PPL GRY WHT	New RC02-B2	2
	New RC05-B2	5
Mono Phone (M) – RCA (M)  BLK RED ORN YEL GRN BLU	QC018	1.8
	QC03	3
	QC05	5

Audio Patch (Bantam)

Type	Model	Length (m)
Bantam (M) – Bantam (M)  BLK RED ORN YEL GRN BLU GRY	BC003M	0.3
	BC006M	0.6
	BC009M	0.9
XLR3 (F) – Bantam (M)  BLK RED ORN YEL GRN BLU GRY	BC02M-X1	2
		2
XLR3 (M) – Bantam (M)  BLK RED ORN YEL GRN BLU GRY	BC02M-X2	2
		2



BC003M

Website







RCA Audio

Website



Bantam



Speaker

Type	Model	Length (m)
XLR4 (F) – XLR4 (M)  BLK RED BLU GRY CRE	SC003	0.3
	SC005	0.5
	SC01	1
	SC05	5
	SC10	10
	SC15	15
XLR4 (F) – XLR4 (M)  BLK GRY	SC05-S8	5
	SC10-S8	10
	SC15-S8	15
NL4 – NL4  BLK GRY	SC05-NL	5
	SC10-NL	10
	SC15-NL	15
	SC20-NL	20
NL8 – NL8  BLK	SC30-NL	30
	SC03-8NL	3
	SC05-8NL	5
	SC10-8NL	10
	SC20-8NL	20
	SC30-8NL	30
	SC50-8NL	50

Website



Audio Patch (Skini/Maxi)

Type	Model	Length (m)
Skini/Maxi (M) – Skini/Maxi (M)  BLK BRN RED ORN YEL GRN BLU PPL GRY WHT	TC003B	0.3
	TC005B	0.5
	TC01B	1
XLR3 (F) – Skini/Maxi (M)  BLK BRN RED ORN YEL GRN BLU PPL GRY WHT	TC02B-X1	2
	TC05B-X1	5
XLR3 (M) – Skini/Maxi (M)  BLK BRN RED ORN YEL GRN BLU PPL GRY WHT	TC02B-X2	2
	TC05B-X2	5



TC003B



Website



Cable Assemblies

Digital Audio, Analog Audio



AES/EBU Digital Audio

Type	Model	Length (m)
XLR3 (F) - XLR3 (M) 	DAC03	3
	DAC05	5
	DAC10	10
	DAC20	20
	DAC30	30
NC3 (F) - NC3 (M) 	DAC003 - B New	0.3
	DAC005 - B New	0.5
	DAC01 - B New	1
	DAC02 - B New	2
	DAC03 - B New	3
	DAC05 - B New	5
	DAC10 - B New	10
	DAC20 - B New	20
	DAC30 - B New	30

Website



AES/EBU Digital Audio (Multi)

Type	Model	Length (m)
Dsub25P (M) - Dsub25P (M) 	8DAC02 - ##	2
	8DAC03 - ##	3
	8DAC05 - ##	5
	8DAC07 - ##	7
	8DAC10 - ##	10
	8DAC30 - ##	30
Dsub25P (M) - NC3 (F/M) 	8DACS02 - #B12	2
	8DACS03 - #B12	3
	8DACS05 - #B12	5
	8DACS07 - #B12	7
	8DACS10 - #B12	10
	8DACS30 - #B12	30

* Please use following information to fill in the '#' in the model above.

Website



<Ordering Information>

Model	Brands (ref.)	A-side		B-side	
		Screws	Wiring	Screws	Wiring
8DAC**-DD	Digidesign	4-40	Individual-A	4-40	Individual-B
8DAC**-TT	TEAC	4-40	Individual-A	4-40	Individual-B
8DAC**-YY	YAMAHA	M2.6	Common-A	M2.6	Common-B
8DAC**-DT	Digidesign - TEAC	4-40	Individual-A	4-40	Individual-B
8DAC**-DY	Digidesign - YAMAHA	4-40	Individual-A	M2.6	Common-B
8DAC**-TY	TEAC - YAMAHA	4-40	Individual-A	M2.6	Common-B
8DACS**-DB12	Digidesign	4-40	Individual-A	N/A	2: Hot
8DACS**-TB12	TEAC	4-40	Individual-A	N/A	3: Cold
8DACS**-YB12	YAMAHA	M2.6	Common-A	N/A	1: Shield

<Wiring>

Individual - A

Ch. No.	Color Coding	HOT	COLD	SHIELD	N.C.
1	BLU/BRN	24	12	25	13
2	BLU/RED	10	23	11	
3	BLU/ORG	21	9	22	
4	BLU/YEL	7	20	8	
5	BLU/GRN	18	6	19	
6	BLU/-	4	17	5	
7	BLU/PPL	15	3	16	
8	BLU/GRY	1	14	2	

Individual - B

Ch. No.	Color Coding	HOT	COLD	SHIELD	N.C.
1	BLU/BRN	18	6	19	13
2	BLU/RED	4	17	5	
3	BLU/ORG	15	3	16	
4	BLU/YEL	1	14	2	
5	BLU/GRN	24	12	25	
6	BLU/-	10	23	11	
7	BLU/PPL	21	9	22	
8	BLU/GRY	7	20	8	





Common - A

Ch. No.	Color Coding	HOT	COLD	SHIELD	N.C.
1	BLU/BRN	1	14	10	9
2	BLU/RED	2	15	12	
3	BLU/ORG	3	16	13	
4	BLU/YEL	4	17	22	
5	BLU/GRN	5	18	23	
6	BLU/-	6	19	24	
7	BLU/PPL	7	20	25	
8	BLU/GRY	8	21	25	

Common - B

Ch. No.	Color Coding	HOT	COLD	SHIELD	N.C.
1	BLU/BRN	5	18	10	9
2	BLU/RED	6	19	12	
3	BLU/ORG	7	20	13	
4	BLU/YEL	8	21	22	
5	BLU/GRN	1	14	23	
6	BLU/-	2	15	24	
7	BLU/PPL	3	16	25	
8	BLU/GRY	4	17	25	

Analog Audio (Multi)

Type	Model	Length (m)
Dsub25P (M) - Dsub25P (M) 	8MC02 - #	2
	8MC03 - #	3
	8MC05 - #	5
	8MC07 - #	7
	8MC10 - #	10
Dsub25P (M) - NC3 (F) 	8MCS02 - #B1	2
	8MCS03 - #B1	3
	8MCS05 - #B1	5
	8MCS07 - #B1	7
	8MCS10 - #B1	10
Dsub25P (M) - NC3 (M) 	8MCS02 - #B2	2
	8MCS03 - #B2	3
	8MCS05 - #B2	5
	8MCS07 - #B2	7
	8MCS10 - #B2	10
Dsub25P (M) - NC3 (F/M) 	8MCS02 - CB12	2
	8MCS03 - CB12	3
	8MCS05 - CB12	5
	8MCS07 - CB12	7
	8MCS10 - CB12	10

* Please choose between A: M2.6 and C: #4-40, and fill in the '#' in the model with A or C.
e.g. 8MC02-A, 8MCS02-CB1

Website






<Wiring for 8MC/8MCS>

Ch. No.	Color Coding	Dsub25P				N.C.	NC3		
		HOT	COLD	SHIELD			HOT	COLD	SHIELD
1	BLK/BRN	24	12	25	13		2	3	1
2	BLK/RED	10	23	11			2	3	1
3	BLK/ORG	21	9	22			2	3	1
4	BLK/YEL	7	20	8			2	3	1
5	BLK/GRN	18	6	19			2	3	1
6	BLK/BLU	4	17	5			2	3	1
7	BLK/PPL	15	3	16			2	3	1
8	BLK/GRY	1	14	2			2	3	1

■ VGA

Not compatible with VESA-DDC Plug and Play.

Type	Model	Length (m)
HD-15 (M) – HD-15 (M)	5VDC015A - 1.5C	1.5
	5VDC02A - 1.5C	2
	5VDC03A - 1.5C	3
	5VDC05A - 1.5C	5
	5VDC10A - 1.5C	10
	5VDC15A - 1.5C	15
	5VDC20A - 1.5C	20
 Screws: #4-40 UNC inch thread		
BLK		
HD-15 (M) – BNC (M)	5VDS015A - 1.5C	1.5
	5VDS02A - 1.5C	2
	5VDS03A - 1.5C	3
	5VDS05A - 1.5C	5
	5VDS10A - 1.5C	10
 Screws: #4-40 UNC inch thread A: 15cm (5VDS015A-1.5C) 30cm (others)		
BLK		
HD-15 (M) – BNC (F)	5VDS003A - J1.5C	0.3
	5VDS015A - J1.5C	1.5
	5VDS02A - J1.5C	2
	5VDS03A - J1.5C	3
	5VDS05A - J1.5C	5
HD-15 (M) – BNC (F)	5VDS10A - J1.5C	10
	HDR15F - J1.5CA	0.13
 Screws: #4-40 UNC inch thread Lock nuts included		




5VDS02A-1.5C

Website



■ VGA with Audio


VESA-DDC Plug and Play compliant

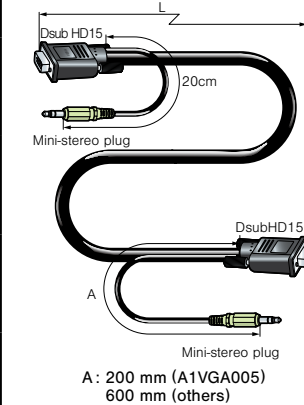Type	Model	Length (m)
HD-15 (M) – HD-15 (M) 3.5 mm TRS	A1VGA005	0.5
	A1VGA0075	0.75
	A1VGA01	1
	A1VGA015	1.5
	A1VGA02	2
	A1VGA03	3
	A1VGA05	5
	A1VGA10	10
 Screws: #4-40 UNC inch thread		
BLK		

Website




■ 3 RCA Video & Audio

Type	Model	Length (m)
RCA - RCA	3RCS003	0.3
	3RCS005	0.5
	3RCS01	1
	3RCS015	1.5
	3RCS02	2
	3RCS03	3
	3RCS05	5
	3RCS10	10
	3RCS15	15
	3RCS20	20
	3RCS30	30
		
BLK		

Website



■ 2 RCA Stereo Audio

Type	Model	Length (m)
RCA - RCA	2RCS003	0.3
	2RCS005	0.5
	2RCS01	1
	2RCS015	1.5
	2RCS02	2
	2RCS03	3
	2RCS05	5
	2RCS10	10
	2RCS15	15
	2RCS20	20
RCA - RCA	2RCS30	30
		
BLK		

Website



Cable Assemblies

HDMI

Overview

4K/8K HDMI solution has been adopted by a lot of applications such as digital signage, video conference systems, streaming video, e-sports, live events, and even more for professional broadcasting. Canare's HDMI product line offers reliable and fully knowledgeable products based on more than 10 years of experience in HDMI business.



Product Finder

Model	HDM***U	page 106	HDM***P	page 106	APF***-HDM	page 107	HDM***AE	page 106	HDM**AE-EQ	page 106	HDM10M-EQ	page 106
Appearance												
Description	ULTRA High Speed HDMI Cable		PREMIUM High Speed HDMI Cable with Ethernet		Active Optical High Speed HDMI Cable		High Speed HDMI Cable with Ethernet		Active High Speed HDMI Cable with Ethernet		Active Durable High Speed HDMI Cable	
Bit Rate	48Gbps		18Gbps		18Gbps		10.2Gbps		10.2Gbps		10.2Gbps	
Frame Rate	8K 60p		N/A		N/A		N/A		N/A		N/A	
	4K 120p		60p		60p		30p		30p		30p	
High Dynamic Range	Dynamic HDR/HDR		HDR		HDR		N/A		N/A		N/A	
Audio Return Channel	eARC/ARC		ARC		N/A		ARC		ARC		ARC	
Remarks	Supports all functions specified in HDMI 2.1a, passive copper cable, lengths up to 7m.		Supports all functions specified in HDMI 2.0, passive copper cable, lengths up to 9m.		Long distance up to 100m, built-in IC, no external power required, one-directional, optical fiber with 28AWG, flexible cable.		Affordable solution for 4K@30p, passive copper cable, lengths up to 5m.		Lengths up to 20m, built-in IC, no external power required, one-directional, active copper cable.		For mobile application, built-in IC, no external power required, one-directional, flexible & durable copper cable, 10 meters only.	

Technical Note

HDMI 2.1 Specification

HDMI 2.1 increases bandwidth capability up to 48Gbps. It highlights supporting ultra high video resolutions and refresh rates including 8K60P/4K120P, additionally Dynamic HDR.

Canare HDM***U series has qualified for The Ultra High Speed HDMI Certification Program. HDM***U is backwards compatible and can be used with the existing installed base of HDMI devices. The following table shows the entire functions that each HDMI device per version features.

	HDMI version						
	1	1.1	1.2-1.2a	1.3-1.3a	1.4-1.4b	2.0-2.0b	2.1
Full HD Blu-ray Disc and HD DVD video	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Consumer Electronic Control (CEC)	Yes	Yes	Yes	Yes	Yes	Yes	Yes
DVD - Audio	No	Yes	Yes	Yes	Yes	Yes	Yes
Super Audio CD (DSD)	No	No	Yes	Yes	Yes	Yes	Yes
Auto lip-sync	No	No	No	Yes	Yes	Yes	Yes
Dolby TrueHD / DTS-HD Master Audio bitstream capable	No	No	No	Yes	Yes	Yes	Yes
Updated list of CEC commands	No	No	No	Yes	Yes	Yes	Yes
3D video	No	No	No	No	Yes	Yes	Yes
Ethernet channel (100 Mbit/s)	No	No	No	No	Yes	Yes	Yes
Audio return Channel (ARC)	No	No	No	No	Yes	Yes	Yes
4 audio streams	No	No	No	No	No	Yes	Yes
2 video streams (Dual View)	No	No	No	No	No	Yes	Yes
Hybrid Log-Gamma (HLG) HDR OETF	No	No	No	No	No	Yes	Yes
Static HDR (HDR static metadata)	No	No	No	No	No	Yes	Yes
Dynamic HDR (HDR dynamic metadata)	No	No	No	No	No	No	Yes
Enhanced audio return channel (eARC)	No	No	No	No	No	No	Yes
Variable Refresh Rate (VRR)	No	No	No	No	No	No	Yes
Quick Media Switching (QMS)	No	No	No	No	No	No	Yes
Quick Frame Transport (QFT)	No	No	No	No	No	No	Yes
Auto Low Latency Mode (ALLM)	No	No	No	No	No	No	Yes
Display Stream Compression (DSC)	No	No	No	No	No	No	Yes

Ultra High Speed HDMI Cable, Ultra High Speed HDMI Cable Label and Logo, Premium High Speed HDMI Cable, Premium High Speed HDMI Cable Label and Logo, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

■ Ultra High Speed HDMI Cable

New

Type	Model	Length (m)	O.D. (mm)
HDMI - HDMI	HDM01U	1	6.0
	HDM015U	1.5	
	HDM02U	2	
	HDM03U	3	
	HDM05U	5	8.0
	HDM07U	7	9.0

- Ultra High Speed HDMI Certification Program qualified
- 8K60p/4K120p, and 48Gbps data rate support
- Improved finger grip connector design
- Simple package

Website



HDM**U

■ Premium High Speed HDMI Cable with Ethernet

Type	Model	Length (m)	O.D. (mm)
HDMI - HDMI	HDM006P	0.6	4.5
	HDM01P	1	
	HDM015P	1.5	5.7
	HDM02P	2	
	HDM03P	3	
	HDM05P	5	6.5
	HDM07P	7	9.0
	HDM09P	9	

*HDM07P and HDM09P are BLK only.

BLK WHT

- Premium HDMI Cable Certification Program qualified
- 4K60p, and 18 Gbps data rate support
- Two jacket colors available

Website



HDM**P Black



HDM**P White

■ High Speed HDMI Cable with Ethernet

Type	Model	Length (m)	O.D. (mm)
HDMI - HDMI	HDM006AE	0.6	6.0
	HDM01AE	1	
	HDM015AE	1.5	
	HDM02AE	2	
	HDM03AE	3	7.3
	HDM05AE	5	

- 4K30p, and 10.2 Gbps data rate support
- Cost effective

■ High Speed HDMI Extension Cable

Type	Model	Length (m)	O.D. (mm)
HDMI (M) - HDMI (F)	HDM003E-FM	0.3	5.7
	HDM02E-FM	2	6.5

- HDMI Type A female-to-male extension
- 4K30p, and 10.2 Gbps data rate support

■ Active High Speed HDMI Cable with Ethernet

Type	Model	Length (m)	O.D. (mm)
HDMI - HDMI	HDM07AE-EQ	7	7.1
	HDM10AE-EQ	10	
	HDM15AE-EQ	15	
	HDM20AE-EQ	20	8.5

- HDMI cable with built-in IC
- 4K30p, and 10.2 Gbps data rate support
- Available in 7 to 20 meters
- No external power required

Note: The cables are directional

Website



■ Active Durable High Speed HDMI Cable

Type	Model	Length (m)	O.D. (mm)
HDMI - HDMI	HDM10M-EQ	10	8.0

HEC not supported

Note: The cables are directional

- Ideal for mobile applications
- Verified 20,000 cycles of bending test
- 10 meters transmission with built-in IC
- 4K30p, and 10.2 Gbps data rate support

Website



Cable Assemblies

HDMI

■ Active Optical High Speed HDMI Cable

ARC & HEC not supported

Type	Model	Length (m)	O.D. (mm)
HDMI - HDMI	APF10-HDM	10	5.8
	APF15-HDM	15	
	APF20-HDM	20	
	APF30-HDM	30	
	APF50-HDM	50	
	APF70-HDM	70	
	APF100-HDM	100	

- Built-in IC, fiber plus 28 AWG copper
- Supports 4K60p
- For longer cabling up to 100 meters without extra device
- Slim, flexible, and lightweight

Note: The cables are directional

Website



■ Detachable Active Optical HDMI Cable New

ARC & HEC not supported

Type	Model	Length (m)	O.D. (mm)
HDMI Type D - HDMI Type D	APF10-DCON	10	5.8
	APF15-DCON	15	
	APF20-DCON	20	
	APF30-DCON	30	
	APF50-DCON	50	
	APF70-DCON	70	
	APF100-DCON	100	


- Built-in IC, fiber plus 28 AWG copper, HDMI type D
- Supports 4K60p
- Detachable solution for narrow space wiring
- Optional interfaces: HDMI type A, Display Port, and DVI
- Slim, flexible, and lightweight

Website




Use of Active Optical HDMI Cables

Connect the right direction

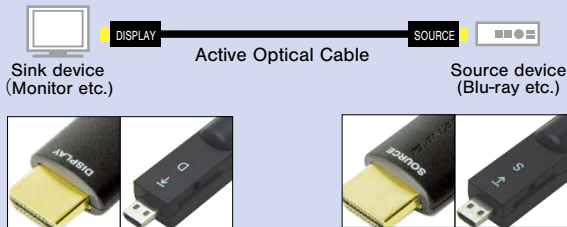


Active Optical HDMI Cables are equipped with IC in both ends connectors. Confirm a designation mark on the connector. It is directional and shall be connected in the right way.

APF**-DCON and adapters

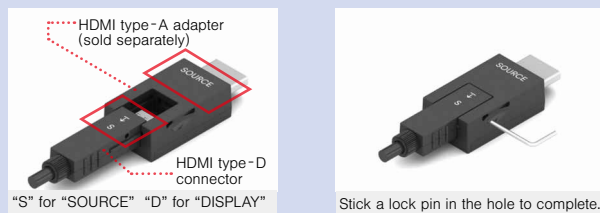

APF**-DCON is outfitted with HDMI type-D, a smaller profile of the normal size of HDMI called type-A, ideal for backside installation of wall/ceiling. Available in HDMI type-A, Display Port, or DVI adapter (sold separately) to hook up devices. Be sure of the appropriate combination of source and display.

Handling Tips

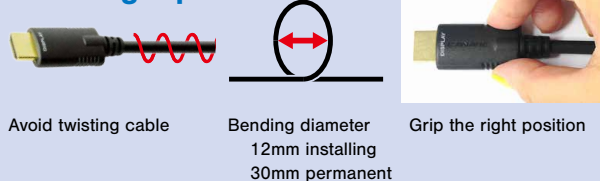

APF**-DCON

■ Interface Connector Options

Cables and Detachable Connectors are sold separately.

Type	Model	Plug Type	Type	Model	Plug Type
	DCON-HDT	Source(TX) HDMI Type A		DCON-DPT	Source(TX) DisplayPort
	DCON-HDR	Monitor(RX) HDMI Type A		DCON-DVT	Source(TX) DVI-D
				DCON-DVR	Monitor(RX) DVI-D

■ HDMI with USB-A(5V)

Type	Model	Plug Type
	DCON-HDE-SET	HDMI Type A with Built-in Equalizer

- Equipped with USB power supply for power insufficient condition.

Be sure to attach these connectors to both ends of the cable when using it.
Sales unit; 2pcs package only

■ Interface Options

Source(TX)	Resolution	Monitor(RX)	Source(TX)	Resolution	Monitor(RX)
HDMI Type D	4K60p	HDMI Type D	DCON-DVT	DVI-D	DCON-DVR
HDMI Type D	4K60p	DCON-HDR	DCON-DVT	4K30p	HDMI Type D
HDMI Type D	DVI-D	DCON-DVR	DCON-DVT	4K30p	DCON-HDR
DCON-HDT	4K60p	DCON-HDR	DCON-DPT	4K60p	HDMI Type D
DCON-HDT	4K60p	HDMI Type D	DCON-DPT	4K60p	DCON-HDR
DCON-HDT	DVI-D	DCON-DVR	DCON-DPT	DVI-D	DCON-DVR
			DCON-HDE-SET	4K60p	DCON-HDE-SET

HDMI Extender


Extends uncompressed HDMI signal up to 100 meters over a Cat6 STP cable.

Model	In the Box
HDE100CP-EXA	TX unit, RX unit, IR cables, AC/DC adapter, wall mount tabs, and RS-232 cable mount connectors.

Key Features and Benefits

- Up to 100 m* at 1080p @ 60 Hz or WUXGA
- Up to 70 m* at 4K @ 30 Hz
- Power over Ethernet (PoE)
- HDCP 1.4/2.2 passthrough
- CEC passthrough
- RS-232 and 20 to 60 Hz wideband IR extension.
- TX unit can be purchased individually as a HDBaseT transmitter. (Model: HDE100CP-TXA. Contact us for more details.)

Website

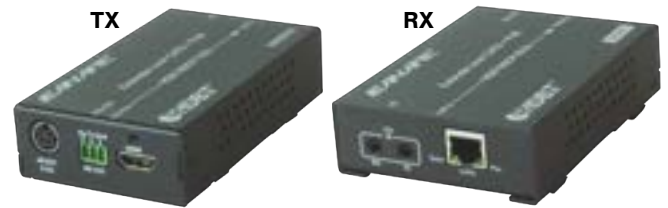

HDE100CP-EXA


TX: 115 × 29 × 71 mm, 160 g

RX: 115 × 29 × 83 mm, 170 g



- * The transmission distance may vary depending on a cable type and environmental factors.
- * Recommended cable: Cat6 STP 24 AWG
- * HEC and ARC not supported

<Connection Example>

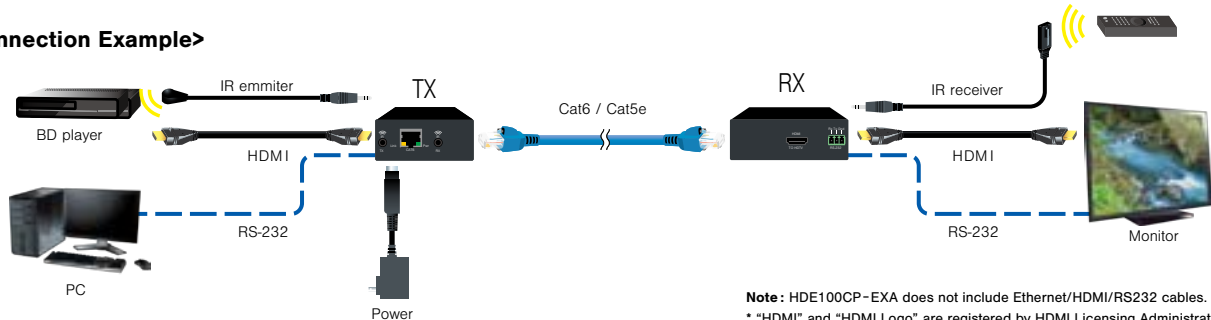

Note: HDE100CP-EXA does not include Ethernet/HDMI/RS232 cables.

* "HDMI" and "HDMI Logo" are registered by HDMI Licensing Administrator, Inc..

* "HDBaseT" and "HDBaseT Logo" are registered by HDBaseT Alliance.

DVI-D Dual Link

VESA-DDC Plug and Play compliant

Type	Model	Length (m)
 Screws: #4-40 UNC inch thread BLK	DVID01A	1
	DVID015A	1.5
	DVID02A	2
	DVID03A	3
	DVID05A	5

Website



DVI-HDMI

DVI-D Single Link to HDMI

Type	Model	Length (m)
 Screws: #4-40 UNC inch thread BLK	DVI01-HDMA	1
	DVI015-HDMA	1.5
	DVI02-HDMA	2
	DVI03-HDMA	3
	DVI05-HDMA	5

Note: DVI cannot carry audio signal.

Website



VGA

VESA-DDC Plug and Play compliant.
5VDC-1.7CF series are enhanced by low-loss coax unit.

Type	Model	Length (m)
HD-15 (M) - HD-15 (M) Screws: #4-40 UNC inch thread BLK	5VDC015-1.7CF	1.5
	5VDC02-1.7CF	2
	5VDC03-1.7CF	3
	5VDC05-1.7CF	5
	5VDC10-1.7CF	10
	5VDC15-1.7CF	15
HD-15 (M) - BNC (F) e-CON (F) Screws: #4-40 UNC inch thread BLK	5VDC20-1.7CF	20
	HDR15F-EJ1.5CA	0.13

* 5VDC2P-1.7CF is not for sale.

Website



👑: Bestselling products

0	06-1001-***	91	2FM3Z2S**-DLS	30	4S12F👑	65		
	06-1877-04	91	2FS**-S	29	4S12FG	65		
1	125	91	2FSZ2S**A-DLS	29	4S14F	65		
	12B1N2	94	2PSC	16	4S18F	65		
	12B2N1	94	2RCS**	104	4S6👑	65		
	12C**-E3	93	2S11F👑	66	4S6G	65		
	12C**-M2	93	2S11FG	66	4S8👑	65		
	12FS**-S	29	2S14F	66	4S8G	65		
	12J12N1	94	2S14FG	66	5	525	91	
	12J12N12	94	2S7F👑	66		5VDC**-1.7CF	108	
	12J12N2	94	2S7FG	66		5VDC**A-1.5C	104	
	12R**-E3	93	2S9F👑	66		5VDS**A-1.5C	104	
	12S1N2	94	2S9FG	66		5VDS**A-J1.5C	104	
	12S2N1	94	2U-AS*	89	6	612A/320A/EIA	90	
	14347 CLEANER	24	2U-AS* D	89		620A	90	
	161U-B1	88	3	320A		6FS**-S	29	
	161U-B2	88		32-12A/620A/EIA		6PSC-**-	16	
	161U-JRUK	88		32B12MF11	94	8	820AQ	90
	161UPSC-**-	16		32B12MS	94		8B1N2	94
	161U-X12F	88		32B12MSW	94		8B2N1	94
	161U-X1F	88		32B12MWF11	94		8C**-E3	93
	161U-X2F	88		32C**-M2	93		8C**-M2	93
	162U-JRUK	88		32C005-M2MS22	93		8DAC**-##	103
	162U-X21	88		32MCKA-ST👑New	78		8DACS**-#B12	103
	162U-X22	88		32MCKA-ST-1.5UNew	78		8FS**-S	29
	16B1F2	94		32MCKA-ST-2UNew	78		8J12N1	94
	16B2F1	94		32MCKA-STSNew	78		8J12N12	94
	16C**-E3	93		32MCKA-STSN-1.5UNew	78		8J12N2	94
	16C**-M2	93		32MCKA-STSN-2UNew	78		8MC**-#	103
	16FS**-S	29		32MD-ST👑	81		8MCS**-#B1	103
	16J12F1	94		32MD-ST-2U	81		8MCS**-#B2	103
	16J12F12	94		32MD-ST-4U	81		8MCS**-CB12	103
	16J12F2	94		32MD-STN	81		8R**-E3	93
	16R**-E3	93		32MD-STN-2U	81		8S15G	66
	16S1F2	94		32MD-STN-4U	81		8S1N2	94
	16S2F1	94		32S1MS2	94		8S2N1	94
	1U-AS*	89		32S2MS2	94		90-60*	91
	1U-AS* D	89		32SVK-ST	79		90-T	91
2	20DV	82		32SVK-ST-1.5UNew	79	A	A1VGA**	104
	20DV-2U👑	82		32WB-*	91		A2C3	68
	20DVS	82		32XP-*	91		A2C3-SS	68
	20DVS-2U	82		3RCS**	104		A2V1	67
	24B12MS	94		3U-AS*	89		A2V1B	67
	24B12MSW	94		3U-AS* D	89		A2V2B	67
	24C**-E3	93	4	48-12A/820AQ/EIA	90		A2V2-L	67
	24C**-M2	93		481U-820AQ	90		A3V2-FB	67
	24C005-E3MS22	93		481U-WB*	91		ABJ-DC	90
	24DV	82		48MC	80		ABP-DPNew	90
	24DV-2U	82		48MCS	80		ABP-TANew	90
	24DVS👑	82		48WB-*	91		AKU-20LFYG	37
	24DVS-2U	82		48XP-*	91		AKU-20SFYG	37
	24FS**-S	29		4ETCS**-TNew	100		APF**-DCONNew	107
	24KRJ-6AJJNew	3		4FO-M3**-LS	30		APF**-HDM	107
	24KRJS-6AJJNew	3		4FO-M3**-SS	30		ASPT-1	22
	24R30-E3	93		4FS**-S	29	B	B11014E	31, 32, 46
	24S1MS2	94		4FS**T-LS	28		B11015E	31, 32, 46
	24S2MS2	94		4FS**T-SS	28		B11016E	31, 32, 46
	26DV	82		4FS**T-ST	28		B11020D	31, 32, 46
	26DV-2U👑	82		4S10F👑	65		B75004A	31, 32, 46, 47, 49
	26DVS	82		4S10FG	65		BC**M	102
	26DVS-2U	82		4S11👑	65		BC02M-X1	102
	26WB-*	91		4S11G	65		BC02M-X2	102

👑: Bestselling products

BCAK-BL	37	BCP-A31	31	BN1003B	47
BCAK-BS	37	BCP-A32	31	BN1004B	47
BCAK-RL	37	BCP-A3AHD	31	BN1005B	47
BCAK-RS	37	BCP-A3F	31	BN1012B	32
BCAK-TL	37	BCP-A4 👑	31	BN1016C	49
BCAK-TS	37	BCP-A42	31	BN1018A	31
BCA-RL	38	BCP-A4F	31	BN1023A	49
BCA-RS	38	BCP-A5	31	BN1024A	49
BCA-TL	38	BCP-A52	31	BN1025B	49
BCA-TS	38	BCP-A55	31	BN1030A	47
BCJ-A10TRC-XP3F	54	BCP-A5F	31	BN1041A	47
BCJ-BPC2P	35	BCP-A77	31	BN1043A	32
BCJ-BPCK	35	BCP-B25HD 👑	31	BN1082A	32
BCJ-BPLH2PA	35	BCP-B25HW	31	BN1083A	32
BCJ-BPLH3PA	35	BCP-B26	31	BN1093	46
BCJ-BPLHA	35	BCP-B28	31	BN1131	45
BCJ-BPLHK	35	BCP-B31F	31	BN1135	45
BCJ-BPLHK2P New	35	BCP-B3F 👑	31	BN1139	32
BCJ-C4	33	BCP-B45HW 👑	31	BN1148	42
BCJ-D25HD	33	BCP-B4F 👑	31	BN1157	42
BCJ-D25HW	33	BCP-B51F	31	BN1158	42
BCJ-D33UHD	33	BCP-B53 👑	31	BN1174	31
BCJ-DC	41	BCP-B56	31	BN1175	31
BCJ-DC-CH	41	BCP-B5F 👑	31	BN1181	31
BCJ-DCJ	42	BCP-C1	32	BN1192	31
BCJ-FC1	34	BCP-C5HD	32	BN1200	39
BCJ-FC1-7/16	34	BCP-C6HD	32	BN1204	33
BCJ-FKCM	43	BCP-C71A	32	BN1205	33
BCJ-FPC	36	BCP-C7FA	32	BN1214	39
BCJ-FPC02 👑	36	BCP-C7HD 👑	32	BN1215	39
BCJ-FPLHA	36	BCP-D33UHD 👑	31	BN7002	31, 49
BCJ-FPLV01 👑	36	BCP-D55UHD 👑	31	BN7003A	31, 32, 33, 39, 42, 46, 47, 49
BCJ-FPLV-12G	36	BCP-D55UHW New	31	BN7011	31, 46, 47, 49
BCJ-FPLVA	36	BCP-D57	31	BN7014	31, 47
BCJ-FPLV-L	36	BCP-D8UHD	31	BN7015A	31, 32, 42, 46, 47
BCJ-HBCJK	40	BCP-DC New	97	BN7016	31, 32, 46, 47, 49
BCJ-JK	33	BCP-DCJ	42	BN7021A	32, 47
BCJ-JRK	34	BCP-H31F	33	BN7022	32
BCJ-JRUDBK	34	BCP-H3B	33	BN7026A	31
BCJ-JRUDK	34	BCP-H45HW	33	BN7029C	31, 32, 46
BCJ-JRUK	34	BCP-H5/1	33	BN7030A	49
BCJ-KCM	43	BCP-H51F	33	BN7045A	31, 47
BCJ-MCVP New	78, 80	BCP-H5B	33	BN7046	31, 32, 47
BCJ-MVP	81	BCP-LC3	32	BN7052A	31
BCJ-R	34	BCP-LC3F	32	BN7074A	32
BCJ-R/1	34	BCP-LC5	32	BN7079	46
BCJ-RCAP	41	BCP-LC5F	32	BN7113	45
BCJ-RPC	36	BCP-RCAJ	41	BN7114	45
BCJ-RPC/1	36	BCP-TK	33	BN7120	45
BCJ-RU	34	BCP-TK-CH	33	BN7121	45
BCJ-RUC1	34	BCP-VA3	31	BN7129	31, 46, 47
BCJ-RUD	34	BCP-VA5	31	BN7136	39, 42
BCJ-RUDB	34	BET-BNC New	51, 78, 79, 81, 82	BN7138	42
BCJ-TRC-XP3F	54	BET-D/H	40, 51	BN7141	39, 42
BCJ-TRC-XP3M	54	BET-DIN	51	BN7143	31
BCJ-VWP	82	BET-HBNC New	40, 51	BN7147	31
BCJ-XJ-A10TRC	54	BET-MBNC	51	BN7157	39
BCJ-XJ-TRC 👑	54	BJ-J	49	BN7158	33
BCJ-XP-TRC 👑	54	BJ-JR	49	BN7159	33
BCP-A25	31	BJ-JRU	49	BN9078A	44
BCP-A25F	31	BJ-JRUD	49	BN9079B	44
BCP-A3	31	BN1002B	47	BN9127B	45

👑: Bestselling products

BN9128C	45	D5.5UHDC**E	97	EC**-X11	101
BN9182A	45	D5.5UHCW**S New	97	EC**-X22	101
BN9194	45	D5C**A-S	97	EE12G-100	10
BP-C**	49	DA202 👑	64	EO12G-100A-**	10
BP-D	88	DA202AT 👑	64	EO12G-100B	10
BP-DXF	88	DA202F-*P 👑	64	EO3G-100	11
BP-K(10) New	4	DA203-**AL	64	EO3G-100A-**	11
BP-LC**	49	DA203AL	64	EO3G-200	11
BP-XF	88	DA206	64	EO-500-**	12
C CB01	33	DAC**	103	ETC**L-B	100
CB02	33	DAC**B New	103	ETC**L-M	100
CB03	33	DC**-9JE22	100	ETC**S-B	100
CB04	33	DCF01	44	ETC**S-BM	100
CB055W New	33	DCF02	45	ETC**S-M	100
CB05A	33	DCJ-C25HW-ML	44	ETC6A**-N New	99
CB22	45	DCJ-FEM	42	ETC6A**-T New	99
CB23	45	DCJ-JR	42	ETC6A**-TN New	99
CB24	33	DCJ-LR	42	F F-09 👑	46
CB25	33	DCJ-LR/1	42	F-10	46
CB26	33	DCM01	44	F-11	48
CB31	45	DCM02	45	F-12	48
CB32	45	DCM03	45	F-12S New	48
CCF4-JK	45	DCON-DPT New	107	F-15	48
CCF4-JKR	45	DCON-DVR New	107	F-15L New	48
CCF5-JFC	45	DCON-DVT New	107	F-16	48
CCF5-JFRC	45	DCON-HDE-SET New	107	FCBA4-F*5W*	17
CCF7-JFC	45	DCON-HDR New	107	FCBA4-F*5W*-PV	17
CCF7-JFRC	45	DCON-HDT New	107	FCBA-F*3W*-3G	18
CCM4-PK	45	DCP-C25HD	42	FCBA-F*3W*-3G-PV	18
CCM4-PKR	45	DCP-C25HW	42	FCBK4-F*5W*-12G	17
CCM5-PFC	45	DCP-C25HW-ML	44	FCBK4-F*5W*-12G-PV	17
CCM5-PFRC	45	DCP-C3F	42	FCBK-F*3W*-12G	18
CCM7-PFC	45	DCP-C4F	42	FCBK-F*3W*-12G-PV	18
CCM7-PFRC	45	DCP-C53	42	FCC**-7N	20
CLETOP 2.5/2.0	24	DM2.5HDC**A New	98	FCC**-7T	21
COF-12B	26	DM2.5HDC**EA-BP New	98	FCC**-9T	21
COF-13C	26	DM2.5HWSC002EA-BJ New	98	FCC**A-WJ	19
COF-32A	26	DM2C**-B	100	FCC**N 👑	19
COF-33B	26	DM3.3UHDC**A New	98	FCC**N-FMRC	22
COPS3-FF*A	25	DM3.3UHDC**EA-BP New	98	FCC**N-FRCM	22
COPS3-FM*A	25	DM4C**-B	100	FC-CV-F-SET-**	19
COPS-FF*A	25	DMC**-B	100	FC-CV-M-SET-**	19
COPS-FM*A	25	DMX203	68	FCE-*	26
COU-BP*A	26	DMX203-2P	68	FCF02N-OCM	23
COU-CV*	26	DMX403	68	FCM02N-OCF	23
COUS-FF*A	26	DN2.5HDC**	98	FCS003A-FR	25
COUS-FM*A	26	DN2.5HWSC002E-BJ New	98	FCS003A-MR	25
CR100-CN	96	DN4.5HDC**	98	FCS015A-FR	22
CR100-S	96	DRC**-F3	98	FCS015A-MR	22
CR90-BN	96	DRC**-S	98	FCT-FC RED	24
D D/MS3057-**A(R1)	93	DS10-AS1	90	FCT-FCKIT RED 👑	24
D/MS3101A	93, 94	DS10-AS2	90	FCT-FCLB RED	24
D/MS3102A	94	DS10-AS3	90	FCT-OC RED	24
D/MS3106B	93	DS10-AS4	89	FCT-OCKIT RED	24
D2.5HDC**E	97	DVI**-HDMA	108	FCT-OCLB RED	24
D2.5HDC**E-D	97	DVID**A	108	FCWDM16A	15
D3.3UHDC**E	97	DVJB-S	82	FCWDM8/1A	15
D3C**A-S	97	DVJB-W	82	FCWDM8/1A-13	15
D3C**A-SR	97	E EC**	101	FCWDM8/2A	15
D3FBC**E	97	EC**-B	101	FCWDM8/2A-13	15
D4.5HDC**E	97	EC**-B11	101	FCWDM-8B	15
D4.5HDC**E-D	97	EC**-B22	101	FCWDM-8B-13	15

👑: Bestselling products

FDM-*	15
FJ-FPC	47
FJ-JR	47
FJ-JRU	47
FJ-JRUD	47
FJ-JRUDB	47
FK37-2°C	93, 94
FK37-3°S	94
FKDLJ-JM New	4
FKDLJ-JM-S New	4
FKDLJ-JS New	4
FKDLJ-JS-S New	4
FKDLP-SUL New	4
FKMPJ-JM New	4
FKSJ-JM New	4
FKSJ-JM-S New	4
FKSJ-JS New	4
FKSJ-JS-S New	4
FM32C** -LS	30
FM32C** -SS	30
FM32C** -SS/LS	30
FM33C** -S	30
FP-C25HD	47
FP-C3	47
FP-C31	47
FP-C3F	47
FP-C4	47
FP-C4F	47
FP-C5	47
FP-C52	47
FP-C53A	47
FP-C55A	47
FP-C5F	47
FP-C71A	47
FP-C7FA	47
FS2C**A-LS	29
FS2C**A-SS	29
FS2C**A-SS/LS	29
FS3C**A-S	29
G GS-4	67
GS-6 👑	67
H HBCJ-FEMK	40
HBCJ-JRK	40
HBCJ-LRK	40
HBCJ-LRK/1	40
HBCP-D25HDA New	39
HBCP-D25HWA New	39
HBCP-D33UHDA New	39
HBCP-D53	39
HDE100CP-EXA	108
HDE100CP-TXA	108
HDM**AE	106
HDM**E-EQ	106
HDM**E-FM New	106
HDM**P	106
HDM**U New	106
HDM10M-EQ	106
HDR15F-EJ1.5CA	108
HDR15F-J1.5CA	104
I IBC Brand Cleaner	24
IU-7/16	34
IU-FC*-SET	22

K K24S-1U-BLK New	3
KC1.2R-****-L	43
KC1.2R-****-S	43
KC1.2R-****-SL	43
KCM-LR	43
KCM-PC	43
L L-1.5C2VS	72
L-2.5C2V	72
L-2.5CFB	71
L-2.5CHD 👑	70
L-2.5CHLT	70
L-2.5CHWS	71
L-2B2AL	60
L-2B2AT 👑	60
L-2E4-**AL	61
L-2E5	60
L-2E5AL	60
L-2E5AT 👑	60
L-2T2S 👑	60
L-3.3CUHD 👑	70
L-3C2V	72
L-3C2VS	72
L-3C2W	72
L-3C-AHD	72
L-3CFB 👑	71
L-3CFW	71
L-3D2V	76
L-3D2W	76
L-4.5CHD 👑	70
L-4.5CHWS 👑	71
L-4CFB 👑	71
L-4CFTX	73
L-4CHD	70
L-4E3-**AT	59
L-4E3-**P 👑	59
L-4E3-2H	59
L-4E3AT	58
L-4E4-**AT 👑	59
L-4E4-*P	59
L-4E5	58
L-4E5AT 👑	58
L-4E5ATG	58
L-4E5AT-WBS	58
L-4E5C	58
L-4E6 👑	58
L-4E6AT 👑	58
L-4E6ATG	58
L-4E6AT-WBS	58
L-4E6S 👑	58
L-5.5CUHD 👑	70
L-5.5CUHWS New	71
L-5C2V	72
L-5C2VS	72
L-5C2W	72
L-5CFB 👑	71
L-5CFTX	73
L-5CFW	71
L-5CHD	70
L-5D2V	76
L-5D2W	76
L-5DFB	76
L-5DFBW-PE	76

L-6CHD	70
L-7CFB	71
L-7CFTX	73
L-7CHD 👑	70
L-8CHD	70
L-8CUHD	70
LC**	101
LF-2SM16	19
LF-2SM7N	20
LF-2SM7T	21
LF-2SM9N 👑	19
LF-2SM9T	21
LF-M32-*C-EM	30
LF-M3R4-12C-EM	30
LF-SM2-**C	28
LF-SM2T-4C	28
LV-61S 👑	72
LV-77S	72
M M202-**AT	62
MBCP-C25F	32
MBCP-C3F	32
MBCP-C4	32
MBCP-C4F	32
MBCP-C53	32
MBCP-C5F	32
MCF-V5C3	44
MCM-V5C3	44
MCVJ-DC	78, 80
MCVJKA-ST5 New	78
MCVJKA-STW New	78
MCVJ-S	80
MCVJ-W	80
MCVPC**	87
MCVPC**-MVP	87
MCVPC**-VWP	87
MCVPC002-BJ	87
MCVP-C25HW	78, 80
MDF-V4C25HW	44
MDF-V4JRU	44
MDM-V4C25HW	44
MDVJ-ST5	81
MDVJ-STW	81
MJ2-M32-1.5U-*** New	85
MJ2-M32-1U-***	85
MJ2-M32-2U-***	85
MJ2-M32CKA-1.5U-*** New	85
MJ2-M32CKA-1U-*** New	85
MJ2-M32CKA-2U-*** New	85
M-KB01 Coming Soon	3
M-MA*U02	89
M-MA1U02A New	89
MR202-**AT 👑	62
MS202	61
MS202-**P	63
MS203	61
MS203-*BS	63
MVJ-DC	81
MVPC**	87
MVPC**A-BP	87
MVPC**-HW	87
MVPC002-BJ	87
MVP-C25HW	81


Index

👑: Bestselling products

MVP - C4	81
N NC5E - **	99
NC6 - **	99
NC6AFSD - ** New	99
NC6F - **	99
NCJ - BCJR	41
NCP - H8HD	41
NDT - DIN	42
NDT - HBC	40
NJ - C5F	50
NK27 - 2*C	93, 94
NK27 - 3*S	94
NP3TMC - B	90
NP - C**	50
O OCC** - 7N	23
OCC** - 7T	23
OCC** - 9T	23
OCC** - N	23
OCC**N - FMRC	23
OCC**N - FRCM	23
OCC** - WJ	23
OCS** - FR	23
OCS** - MR	23
OE12G - 101B	10
OE3G - 101	11
OE3G - 201	11
OE - 501	12
OM6C**	27
OM6S** - JR	27
OM6S** - PR	27
P PC**	101
PC** - B	101
PH50A	79, 81, 82, 90
PH50B	78, 80, 90
PSM2 - **	16
Q QC**	102
R R300	96
R300 - BN	96
R300 - CN	96
R300 - L	96
R300 - S 👑	96
R380 - S 👑	96
R460 - S 👑	96
RC**	102
RC** - B1 New	102
RC** - B2 New	102
RC** - X1	102
RC** - X2	102
RCAP - C25F	46
RCAP - C25HD	46
RCAP - C3A	46
RCAP - C3F	46
RCAP - C3GS	46
RCAP - C42	46
RCAP - C4A	46
RCAP - C4F	46
RCAP - C53	46
RCAP - C5A	46
RCAP - C5F	46
RCAP - C77	46
RGT310.MFK	95
RGT310.RM	95

RGT380.MFK	95
RGT380.RM	95
RJ - BCJR	46
RJ - BCJRUD	46
RJ - BCJRUDB	46
RJC5E - 4P+	69
RJC5E - 4P - WJ	69
RJC5ES - 4P - BS	69
RJC6 - 4P+	69
RJC6 - 4P - F	69
RJC6A - 4P - F	69
RJC6A - 4P - SFM New	69
RJ - JR	46
RJ - JRUD	46
RJ - JRUDB	46
RJ - RU	46
RJ - RUD	46
RJ - RUDB	46
RJSJ - J6A New	4
RJUJ - J6A New	4
RS - 422 - 1U - **	86
RS - 422 - 2U - **	86
S S410 - *P	65
SC**	102
SC** - 8NL	102
SC** - NL	102
SC** - S8	102
SG*** - T3* New	3
SMAJ - C**	50
SMAP - C**	50
SPC**	101
SPC** - B1	101
SPC** - B2	101
SVJK - AP	79
SVJK - DC	79
SVJK - L	79
SVJK - S	79
SVPC**	87
SVP - C25HW	79
SVP - TK	79
SVP - ULK	79
T TB - 2A	51
TC**B	102
TC**B - X1	102
TC**B - X2	102
TC - 1	51
TC - 2	51
TCD - 1DB	51
TCD - 3151D	51
TCD - 316C	51
TCD - 31C	51
TCD - 35CA	51
TCD - 35D	51
TCD - 35DF	51
TCD - 451CA	51
TCD - 4CA	51
TCD - 55FA	51
TCD - 55UHD	51
TCD - 57C	51
TCD - 5CF	51
TCD - 5HD	51

TCD - 65C	51
TCD - 67HD	51
TCD - 7CA	51
TCD - 8HD	51
TCD - 96C	51
TCD - D253F	51
TCD - D534F	51
TNP - C**	50
TRM - 100	14
TRM - 101	14
TRM - 210	13
TRM - 210A - **	13
TRM - 211	13
TRM - 220	14
TRM - 220A - **	14
TRM - 221	14
TRM - 230	14
TRM - 231	14
TRM - 300A - G**	13
TRM - 300 - G31	13
TRM - 300 - G55	13
TRM - 400	14
TRM - 401	14
TRM - 540	12
TRM - 540A - **	12
TRM - 541	12
TS100E 👑	51
TS100U	51
TXC** - F	98
TXC** - K	98
V V* - 1.5C	73
V* - 3C	73
V* - 3CFB	73
V* - 3CFW	73
V* - 4CFB	73
V* - 5C	73
V* - 5CFB	73
V* - 5CFW	73
V4 - 2.5CHW	73
VJ2 - M32 - 4U	85
VJ2 - V20 - 1U - ***	85
VJ2 - V20 - 2U - ***	85
VJ2 - V24 - 1U - ***	85
VJ2 - V24 - 2U - ***	85
VJ2 - V26 - 1U - ***	85
VJ2 - V26 - 2U - ***	85
VJ - DC	82
VPC** - HW - WC	87
VPC** - WC	87
VWP - C25HW	82
VWP - C4A	82
W WD5.5UHD New	97
WEPZ0258	16
WMM0190	16
X XJ3F - A10TRC - BCJ	54
XJ3F - P3FA	88
XJ3F - P3MA	88
XJ3F - TRC - BCJ	54
XJ3M - P3FA	88
XJ3M - P3MA	88
XJ3M - TRC - BCJ	54

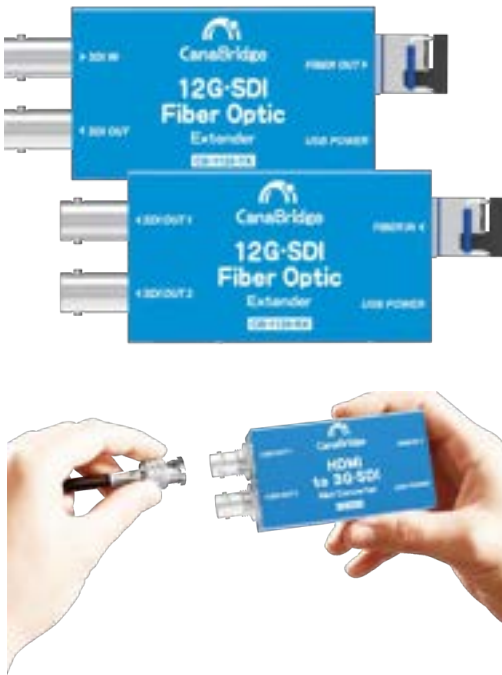

About CanaBridge

The professionals' choice

A sub brand "CanaBridge" is established by Canare. Providing simple and affordable solutions of video signals, bridging long lasting Canare users between new generation of SNS video creators.

CanaBridge video converters will give you smart move on HDMI, 3G-SDI, and 12G-SDI interconnects. Canare engineers its development and quality verification. All CanaBridge products are equipped with light weight and sleek aluminum chassis.

CanaBridge 5 Identities

01 *Superb Combination*

We raised the bar on mini converters solutions. CanaBridge converters connected with Canare products are superb combination.

02 *Professional Support*

Canare is here to assist you all the time. All CanaBridge products include one-year hassle free exchange program. In addition, We will provide the best sales support as well as after sale service.

03 *Stable Performance*

CanaBridge converters will deliver stable performance even under demanding environments. It meets your expectation without any surprises.

04 *Fully Engineered*

Canare engineers invest engineering effort and whole enthusiasm into CanaBridge products. Verified technical accuracies and put it into original aluminum case.

05 *Solid*

CanaBridge has been looking at cutting-edge technologies, appropriate materials, and standardized processes.

CanaBridge

Lifetime Support
CanaBridge 5 Identities Guarantees

5 CanaBridge
Identities Guarantees 

12G-SDI Solutions

CB-1120 (TX and RX) New

12G-SDI Fiber Optic Extender

Key Features and Benefits


- 12G/6G/3G-SDI input & loopout on transmitter
- Dual 12G-SDI outputs on receiver
- Supports up to 12G bandwidth
- SDI input automatic switching SD, HD, 3G, 6G, 12G-SDI
- 10km transmission distance




12G-SDI

Specifications


Model	CB-1120 (TX and RX)
Power	Micro USB
Power Consumption	2.0W (Max)
Voltage Range	USB 3.3~5.5 V
Dimension	72.4 × 41 × 24.6 mm
Net Weight	Transmitter: 115 g, Receiver: 115 g
Gross Weight	960g

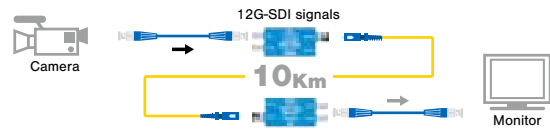

CB-1120-TX



CB-1120-RX



CB-8120 Coming Soon

12G-SDI 1 × 2 Signal Repeater

Key Features and Benefits



- Input: 1 × 12G-SDI, Output: 2 × 12G-SDI
- Support DVB-ASI signal
- Automatically detects SD, HD, 3G, 6G, 12G-SDI
- Automatic cable equalization and signal retiming
- Detachable bracket design for wall mounting



12G-SDI

Specifications

Model	CB-8120
Power	Micro USB
Power Consumption	1.0W (Max)
Voltage Range	USB 3.3~5.5 V
Dimension	72.4 × 41 × 24.6 mm
Net Weight	110 g
Gross Weight	470g

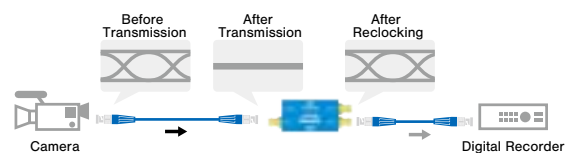

CB-8130 New

12G-SDI 1 × 5 Reclocking Distribution Amplifier

Key Features and Benefits


- 12G/6G/3G/HD/SD-SDI multi-rate signal processing
- 5 buffered and re-clocked outputs
- Support DVB-ASI signal (OUT1, 4, 5)
- Automatic cable equalization and signal retiming
- All ancillary data is passed to the outputs



12G-SDI

Specifications

Model	CB-8130
Power Supply	Threaded locking DC connector
Voltage Range	DC 6~23 V
Power Consumption	3W (Max)
Dimension	125.5 × 102 × 27.5 mm
Net Weight	310 g
Gross Weight	950 g

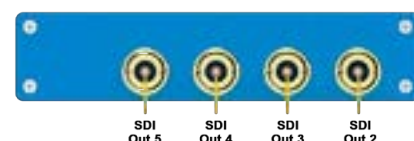

3G-SDI Solutions

CB-2011

3G-SDI to HDMI mini Converter

CB-2012

HDMI to 3G-SDI mini Converter

Key Features and Benefits

- Being made for Broadcast equipment
- Powered Anywhere
- Pocket Size and Easy to Mount

Specifications

Model	CB-2011	CB-2012
Power	Micro USB	
Power Consumption	2.5W (Max)	2W (Max)
Voltage Range	USB 3.3-5.5 V	
Dimension	72.4 × 41 × 24.6 mm	
Net Weight	110 g	
Gross Weight	470 g	

CB-2021

3G-SDI to HDMI & AV Scaling Converter

Key Features and Benefits

- Up/down scaling and frame rate conversion
- AES/EBU or Analog Audio Embedding & De-embedding
- Input signal automatic detection and configuration
- LED indicators for power and signal lock

Specifications

Model	CB-2021
Power	Threaded locking connector
Power Consumption	6W (Max)
Voltage Range	DC 6-24 V
Dimension	125.5 × 101.4 × 27.5 mm
Net Weight	310 g
Gross Weight	995 g

CB-2022








HDMI & AV to 3G-SDI Scaling Converter

Key Features and Benefits

- Up/down scaling and frame rate conversion
- AES/EBU or Analog Audio Embedding & De-embedding
- Input signal automatic detection and configuration
- LED indicators for power and signal lock

Specifications

Model	CB-2022
Power	Threaded locking connector
Power Consumption	6W (Max)
Voltage Range	DC 6-15 V
Dimension	125.5 × 101.4 × 27.5 mm
Net Weight	310 g
Gross Weight	995 g

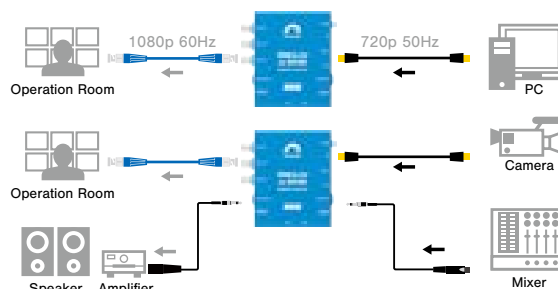

Video Converters

CanaBridge

3G-SDI Solutions

CB-8010

3G-SDI 1 × 4 Distribution Amplifier



Key Features and Benefits

- Automatically detects SD, HD and 3G-SDI
- 4 buffered and re-clocked outputs
- 3G/HD/SD-SDI multi-rate signal processing
- Output 2 & 4 support DVB-ASI signal
- Automatic cable equalization and signal retiming



Specifications

Model	CB-8010
Power	Micro USB or Threaded locking DC connector
Power Consumption	1.5W (Max)
Voltage Range	USB 5V, DC 5-17 V
Dimension	125.5 × 101.4 × 27.5 mm
Net Weight	310 g
Gross Weight	920 g

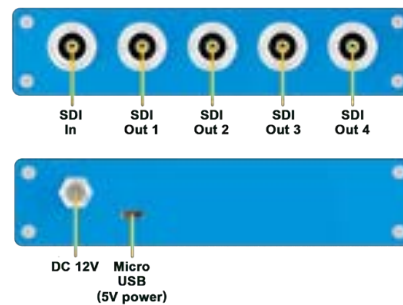


CB-1010 (TX and RX)

3G-SDI Fiber Optic Extender


Key Features and Benefits

- 20km transmission distance
- Support 3Gbit Level A and Level B (all formats)
- SFP/LC Fiber transmitter & receiver
- SDI equalization and re-clocking
- 3G-SDI input & loopout on transmitter



Specifications

Model	CB-1010 (TX and RX)
Power	Micro USB
Power Consumption	1.5W (Max)
Voltage Range	USB 3.3-5.5 V
Dimension	72.4 × 41 × 24.6 mm
Net Weight	Transmitter: 115 g, Receiver: 115 g
Gross Weight	750 g



Lifetime Support

CanaBridge 5 Identities Guarantees

5 CanaBridge Identities Guarantees



Headquarters

Canare Electric Co., Ltd.

5F, LIVMO Rising Bldg., 3-19-1 Shinyokohama, Kohoku-ku,
Yokohama-shi, Kanagawa, 222-0033 Japan

Phone: +81-45-620-7332

Fax: +81-45-620-7364

www.canare.co.jp/en/



Sales Subsidiaries

United States

Canare Corporation of America

45 Commerce Way, Unit C, Totowa, New Jersey, 07512 U.S.A.

Phone: +1-973-837-0070

www.canare.com

South Korea

Canare Corporation of Korea

4F Canare Bldg, 202-21, Heojun-ro, Gangseo-gu, Seoul, 07532 Korea

Phone: +82-2-2668-2560

www.canare.co.kr

Taiwan

Canare Corporation of Taiwan

3F, No.512-7, Yuanshan Road, Zhonghe District, New Taipei City 235, Taiwan R.O.C.

Phone: +886-2-2222-1010

www.canare.com.tw

China

Canare Electric Corporation of Tianjin

Room 1806, Full Tower, 9 Dongsanhuan Middle Road, Chaoyang District, Beijing, 100020 China

Phone: +86-10-85911490

www.canare.com.cn

Singapore

Canare Singapore Private Ltd.

Blk 4012 Ang Mo Kio, Avenue 10, #02-08/09 Techplace 1, 569628 Singapore

Phone: +65 6293 5692

www.canare.com.sg

India

Canare Electric India Private Ltd.

104, 1st Floor, CSC, L-Pocket, Sarita Vihar, New Delhi-110076 Delhi - India

Phone: +91-11-41052365

www.canare.in

Germany

Canare Europe GmbH

Hoffeldstr. 104, Hof 1, 40235 Düsseldorf, Germany

www.canare.eu

Phone: +49 211 9173 4503

UAE

Canare Middle East FZCO

Bld. No: QD-06 WH/27 Dafza Industrial Park, Dubai, United Arab Emirates

Phone: +971 43233450

www.canare-me.com

